


Tehnički list za artikl: LID17447--

Sutil Quadro2 LED 22W 2200lm 3K/4K/5,7K IP20 230V 120° bije.

Komplet s driverom

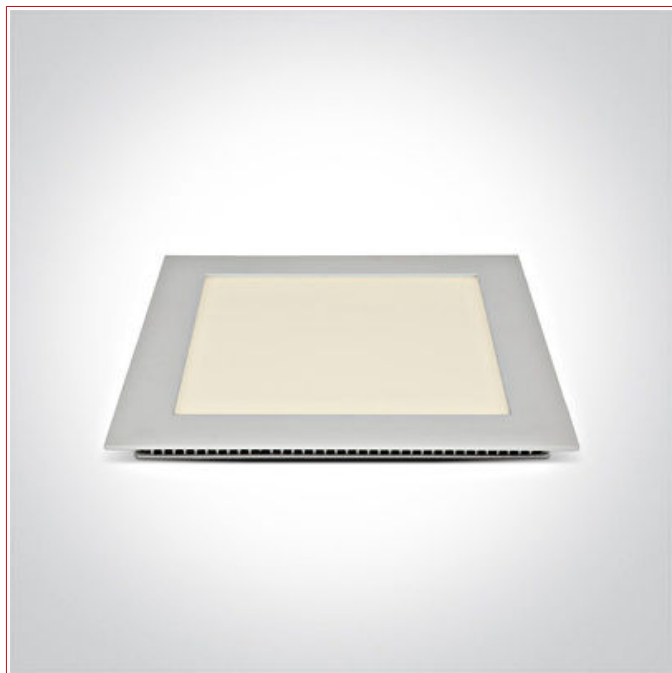

Info o proizvodu

CCT Variable 22W slim downlight LED, IP20, ideal for commercial applications such as offices, galleries and showrooms. Supplied with 550mA non-dimmable LED driver. Complies with standard EN60598-1 and any other specific standards.


Tehnički podaci

Neto duljina (mm)	225,00
Neto širina (mm)	225,00
Neto visina (mm)	22,00
Vrsta svjetiljke	Stropne ugradne svjetiljke
Boja	bijela
Materijal	Akril Aluminij tlačni lijev
Pokrov	Akril
Kut svjetlosti (°)	120
Pogonski uređaj	LED Driver
Radni napon AC (V)	220-240
Ulazni napon AC (V)	220-240
Pogonska struja mA (mA)	550

Tehnički podaci - nastavak

Ulazna struja (A)	0,55
Grlo	LED Platine
Efikasnost sustava (lm/W)	100
Snaga (W)	22
Boja svjetla	Hladno bijela Neutralno bijela Toplo bijela
Temperatura boje (K)	4000 3000 5700
Faktor uzvrata boje	≥80
Svjetlosni tok (lm)	2200
Životni vijek	36.000h
Dimabilno	Ne
Klasa zaštite	II
IP stupanj zaštite	IP20
Ugradna dubina (mm)	50
Izvor svj. uklj.	Da
(DxŠxV) mm	225x225x22
Otvor (mm)	210x210
OTVOR mm	210x210

Mjerne skice: Sutil Quadro2 LED 22W 2200lm 3K/4K/5,7K IP20 230V 120° bije.

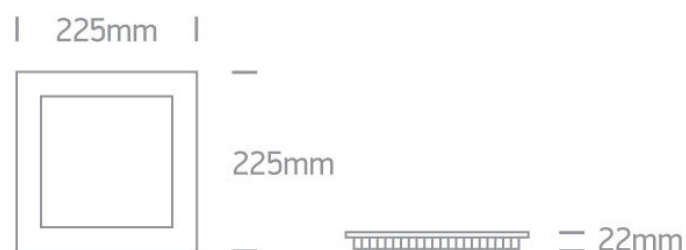

OPIS	KAT. BROJ
Sutil Quadro2 LED 22W 2200lm 3K/4K/5,7K IP20 230V 120° bije. Komplet s driverom	LID17447