


Tehnički list za artikl: LIMT0044--

Lano HP 60W 8600lm 940 IP44 M600 opal pokrov

uključen driver, DIP-Switch 50W/7370lm, 40W/6050lm, 30W/4460lm



Krivulja raspodjele svjetla




Tehnički podaci

Neto duljina (mm)	595,00
Neto širina (mm)	595,00
Neto visina (mm)	60,00
Neto masa (kg)	1,00
Min. temperatura okoline (°C)	-20
Maks. temperatura okoline (°C)	45
Vrsta svjetiljke	LED Panel
Način montaže	Stropna ugradna

Tehnički podaci - nastavak

Boja	bijela
Materijal	Čelični lim Aluminij
Kut svjetlosti (°)	108
Radni napon AC (V)	220-240
Pogonska struja mA (mA)	30W - 325 60W - 675 40W - 450 50W - 525
Snaga (W)	60 50 40 30
Boja svjetla	Neutralno bijela
Temperatura boje (K)	4000
Faktor uzvrata boje	≥90
Stabilnot boje MacAdam (sdcm)	3
Svjetlosni tok (lm)	4460 8600 7370 6050
Životni vijek	50.000h / L80 / B50
Dimabilno	Ne
Klasa zaštite	II
IP stupanj zaštite	IP20/44
Energetska klasa	B
Izvor svj. uklj.	Da
(DxŠxV) mm	595x595x60

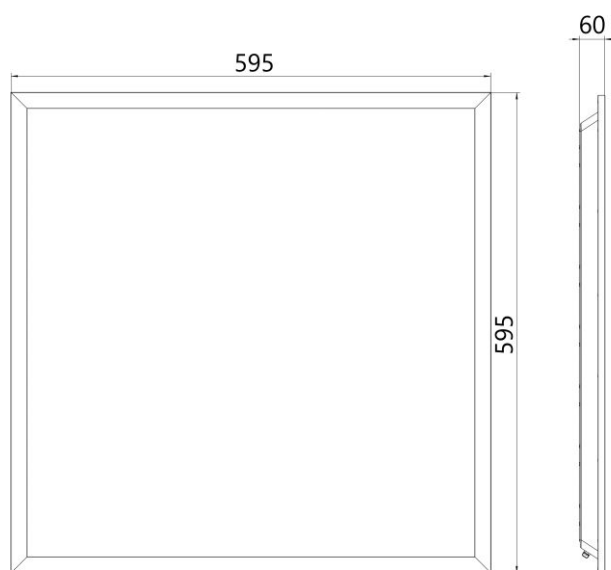Mjerne skice: Lano HP 60W 8600lm 940 IP44 M600 opal pokrov

Tablica artikla

OPIS	KAT. BROJ
Lano HP 60W 8600lm 940 IP44 M600 opal pokrov uključen driver, DIP-Switch 50W/7370lm, 40W/6050lm, 30W/4460lm	LIMT0044
Dodatni pribor	
Stropni nadgradni okvir za LED Panele serije LANO BL M600 pribor za nadgradnu montažu	LIMK005