


Tehnički list za artikl: LIN1122078

Park LED 70W 8400lm 4000K IP65, IK08 asimetrični sivi

RAL 7042, ulična svjetiljka




Krivulja raspodjele svjetla



Tehnički podaci

Neto duljina (mm)	545,00
Neto širina (mm)	225,00
Neto visina (mm)	72,00
Neto masa (kg)	1,70
Min. temperatura okoline (°C)	-20
Maks. temperatura okoline (°C)	40
Način montaže	Montaža na stup
Boja	siva
Materijal	Polikarbonat Aluminij tlačni lijev
Kut svjetlosti (°)	75x105
Pogonski uređaj	LED Driver
Grlo	LED Platine
Efikasnost sustava (lm/W)	120
Snaga (W)	70
Boja svjetla	Neutralno bijela
Temperatura boje (K)	4000
Faktor uzvrata boje	>80
Svjetlosni tok (lm)	8400
Životni vijek	50.000h / L70 / B50
Dimabilno	Ne
Klasa zaštite	I
IP stupanj zaštite	IP65
Energetska klasa	D
Otpornost na udarce	IK08
Izvor svj. uklj.	Da
Prenaponska zaštita (kV)	10
Vrh stupa (mm)	50 - 60
(DxŠxV) mm	545x225x72
Nazivna struja (A)	220-240

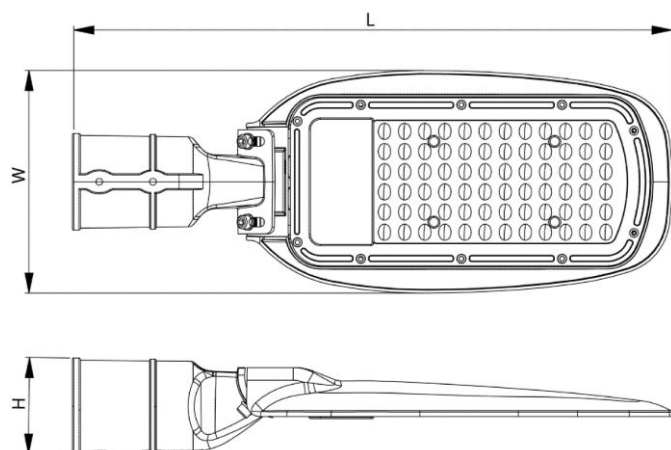Mjerne skice: Park LED 70W 8400lm 4000K IP65, IK08 asimetrični sivi

Tablica artikla

OPIS	KAT. BROJ
Park LED 70W 8400lm 4000K IP65, IK08 asimetrični sivi RAL 7042, ulična svjetiljka	LIN1122078
Potrebni pribor	
Spojna kutija 1 ulaz/1 izlaz 16A 450V 0,5-1,5mm IP67 Mounting accessory; 26 ACCES&GADGETS	LID16098
	LI228725
Spojna kutija IP68, 3-polna, Poliamid (PA), 115X27mm (DxØ) za 3-žilne kabele promjera 6-12mm, prihvat stezaljki 3x4mm ² , nazivni napon 230V AC, maksimalni napon 400V AC, maks. 17,5A	LI228730