


Tehnički list za artikl: LITP0074--

CAPRI LED Basic 200W 22000lm 3000K asimetrični IP65 crni

LED reflektor, IP65, nazivni napon: 230V AC, mogućnost rada (do 10h) na naponu: 170 - 300V DC



Krivulja raspodjele svjetla




Info o proizvodu

The CAPRI Basic LED floodlight has a power rating of 200W (22000lm) and a color temperature of 3,000K. The die-cast aluminum housing with hardened steel is rated IP65 and IK07 and offers a service life of up to 50000h. CAPRI Basic is suitable for continuous operation at 230VAC, as well as for operation lasting several hours (up to 10h) at 170-300VDC and comes with a 0.5m connection cable (H05RN-F 3x1.0 mm²) including a connector. The floodlight's beam angle is asymmetrical at 80x40°.



Tehnički podaci

Neto duljina (mm)	310,00
Neto širina (mm)	60,00
Neto visina (mm)	360,00
Neto masa (kg)	4,86
Min. temperatura okoline (°C)	-35
Maks. temperatura okoline (°C)	40
Vrsta svjetiljke	Reflektori
Način montaže	Podna Stropna Stropna nadgradna
Radna temperatura (°C)	-35 do +40
Boja	crna
Materijal	Kaljeni čelik Aluminij tlačni lijev
Prenaponska zaštita (kV)	4
Pokrov	Bistri
Kut svjetlosti (°)	80x40
Ulazni napon AC (V)	120 - 277
Ulazni napon DC (V)	max. 10h, 170 - 300
Grlo	LED Platine
Efikasnost sustava (lm/W)	110
Snaga (W)	200
Boja svjetla	Toplo bijela
Temperatura boje (K)	3000
Faktor uzvrata boje	≥80
Stabilnot boje MacAdam (sdcM)	≤6
Svjetlosni tok (lm)	22000
Životni vijek	50.000h / L70 / B50
Dimabilno	Ne
Klasa zaštite	I
IP stupanj zaštite	IP65
Otpornost na udarce	IK07
Izvor svj. uklj.	Da
Oznaka zaštite od požara	D
(DxŠxV) mm	310x60x360
Broj svjetiljki po osiguraču B10	2
Broj svjetiljki po osiguraču B16	3
Broj svjetiljki po osiguraču B25	5
Broj svjetiljki po osiguraču C10	3
Broj svjetiljki po osiguraču C16	5
Broj svjetiljki po osiguraču C25	8

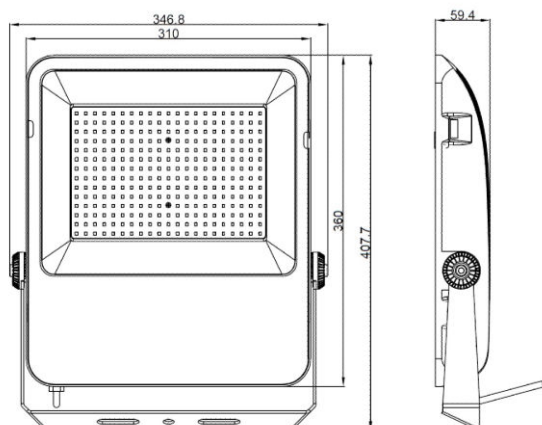Mjerne skice: CAPRI LED Basic 200W 22000lm 3000K asimetrični IP65 crni**OPIS****KAT. BROJ**

CAPRI LED Basic 200W 22000lm 3000K asimetrični IP65 crni

LITP0074

LED reflektor, IP65, nazivni napon: 230V AC, mogućnost rada (do 10h) na naponu: 170 - 300V DC