


Tehnički list za artikl: LIUS0004-A

PUNTO LED 5W/8W 927/930/940 36° 230V IP65/IP20 dim. crna

Ugradbena stropna svjetiljka s mogućnošću odabira snage (5W/8W) i podešavanjem temperature boje (2700K/3000K/4000K), CRI > 90, Triac dimmabilna



Krivulja raspodjele svjetla



PUNTO LED Recessed Downlight

The PUNTO LED recessed downlight in black combines flexibility with excellent light quality. The integrated power selector allows the output to be adjusted between 5 W and 8 W, making it suitable for a wide range of lighting applications. The selectable color temperature offers a choice of 2700 K (Extra Warm White), 3000 K (Warm White), or 4000 K (Neutral White), allowing the lighting atmosphere to be tailored to the environment. With a high CRI > 90, colors are rendered naturally and accurately. The precise 36° beam angle provides focused and comfortable illumination, while Triac dimming enables smooth brightness adjustment to create the desired ambiance. The luminaire operates directly on 230 V mains voltage. The fitting features a practical protection rating design: IP65 from below for protection against dust and water ingress in the visible area, and IP20 from above for installation within the ceiling. For advanced lighting control, the LIUS0042 8 W LED DALI Driver for the PUNTO series is available as an optional accessory. It supports DALI 2, Push Dim, smooth dimming, and AC/DC operation.



Tehnički podaci


Neto visina (mm)	30,00
Neto promjer (mm)	80,00
Neto masa (kg)	0,24
Min. temperatura okoline (°C)	-20
Maks. temperatura okoline (°C)	45
Vrsta svjetiljke	Stropne ugradne svjetiljke
Način montaže	Vrata
Boja	crna
Materijal	Aluminij
Kut svjetlosti (°)	36
Pogonski uređaj	LED driver AC
Radni napon AC (V)	220-240
Pogonska struja mA (mA)	185
Grlo	LED Platine
Snaga sustava (W)	90
Snaga (W)	5; 8
Boja svjetla	Toplo bijela
Temperatura boje (K)	3000K 2700K 4000K
Faktor uzvrata boje	≥90
Stabilnot boje MacAdam (sdcm)	<6
Svjetlosni tok (lm)	5W =450; 8W=720
Životni vijek	50.000h
Dimabilno	leading edge dimmable (L) trailing edge dimmable (C) Da
Klasa zaštite	II
IP stupanj zaštite	IP65 IP20
Energetska klasa	E
Ugradna dubina (mm)	35 (Treiber: 55)
Izvor svj. uklj.	Da
Promjer (mm)	80
ØxV mm	80x30
Otvor (mm)	Ø 68
OTVOR mm	Ø 68
Broj svjetiljki po osiguraču B10	111
Broj svjetiljki po osiguraču B16	178
Broj svjetiljki po osiguraču C10	111

Tehnički podaci - nastavak

Broj svjetiljki po osiguraču C16

| 178

Mjerne skice: PUNTO LED 5W/8W 927/930/940 36° 230V IP65/IP20 dim. crna

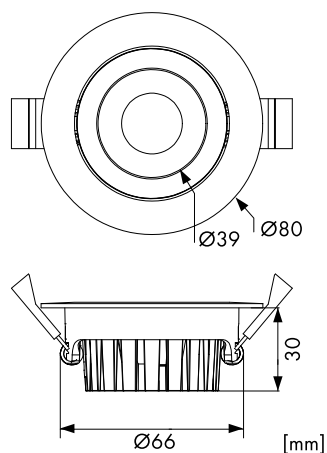

Tablica artikla

OPIS	KAT. BROJ
PUNTO LED 5W/8W 927/930/940 36° 230V IP65/IP20 dim. crna	
Ugradbena stropna svjetiljka s mogućnošću odabira snage (5W/8W) i podešavanjem temperature boje (2700K/3000K/4000K), CRI > 90, Triac dimmabilna	LIUS0004-A
Dodatni pribor	
LED DALI driver 8W za PUNTO seriju	
DALI 2, Push Dim, bešavno zatamnjenje, AC/DC	LIUS0042
Uzidni LED dimer, upravljanje tipkalom, 4-350VA, RLC	
s priključnim vijčanim stezaljkama; nazivni napon: 230V AC; potrošnja: 2VA; memorijska funkcija; dimenzije: 46x46x19mm (ŠxVxD)	EHLED350K
Uzidni LED dimer, upravljanje tipkalom, 4-350VA, RLC	
s priključnim vodičima; nazivni napon: 230V AC; potrošnja: 2VA; memorijska funkcija; dimenzije: 45x45x12mm (ŠxVxD)	EHLED350D
Umetak dimera, 6-100W/VA, RL (pogodan za LED)	
Kompletirati s pokrovom (odabrati jedan od ponuđenih pokrova): EV102013--(bijeli), EV112013--(antracit), EV122013--(srebrni) , EV103020 EV102313--(bijeli), EV112313--(antracit) , EV122313--(srebrni)	
Okvir CLASSIC, 1-struki, bijeli	
VISIO S 50 (50x50), VISIO 50	EV105001
Pokrov/tipka dimera, bijeli	
VISIO S 50 (50x50), VISIO 50	EV102013
Okvir CUBIC, 1-struki, bijeli	
VISIO S 55 (55x55)	EV105301
Pokrov/tipka dimera, bijeli	
Kompletirati s umetkom EV103020--, VISIO S 55 (55x55), CUBIC	EV102313