

Tehnički list za artikl: LIVT4855--

6W LED Premium Panel Downlight - okrugli

4000K, 420lm, 120° **ECONOMY**

including driver, quick connector




Tehnički podaci

(DxŠxV) mm	120x120x25
ØxV mm	120x25
OTVOR mm	Ø110
Boja	bijela
Materijal	PS PMMA Aluminij
Način montaže	Stropna ugradna
Otvor (mm)	Ø110
Snaga (W)	6
Radni napon AC (V)	200-240
Boja svjetla	Neutralno bijela
Svjetlosni tok (lm)	420
Faktor snage	>0.5

Tehnički podaci - nastavak

Faktor uzvrata boje	≥80
Dimabilno	Ne
Temperatura boje (K)	4000
Životni vijek	20.000h
Kut svjetlosti (°)	120
IP stupanj zaštite	IP20
Klasa zaštite	II
Min. temperatura okoline (°C)	-20
Maks. temperatura okoline (°C)	45
Vrsta svjetiljke	LED Panel
Izvor svjetla	SMD LED
Grlo	LED Platine
Efikasnost sustava (lm/W)	70
Snaga (W)	6
Frekvencija (Hz)	60
Duljina (mm)	120
Širina (mm)	120
Visina (mm)	25
Promjer (mm)	120

Mjerne skice: 6W LED Premium Panel Downlight - okrugli 4000K, 420lm, 120°

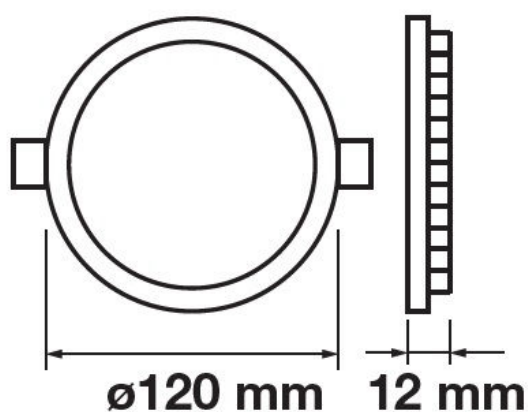

OPIS

KAT. BROJ

6W LED Premium Panel Downlight - okrugli 4000K, 420lm, 120°
including driver, quick connector

LIVT4855