

Tehnički list za artikl: LIVO6449--

36W 2880lm 6400K 220-240V IP65 120° 1,2m EM 3h

Battery Ni-Cd 9.6V 2200mAh, 7W in emergency mode




Tehnički podaci

(DxŠxV) mm	1200x76x66
Boja	bijela siva
Materijal	PC
Grlo	LED Platine
Način montaže	Ovjesna Stropna nadgradna Zidna nadgradna
Snaga (W)	36
Proizvođač	08-V-TAC
Radni napon AC (V)	220-240
Izvor svj. uklj.	Da
Boja svjetla	Dnevna
Svjetlosni tok (lm)	2880
Luminous flux in emergency mode (lm)	864
Faktor snage	>0.9
Faktor uzvrata boje	>70

Tehnički podaci - nastavak

Temperatura boje (K)	6400
Životni vijek	20000
Nužna rasvjeta	Emergency kit 3h
Kut svjetlosti (°)	120
IP stupanj zaštite	IP65

Mjerne skice: 36W 2880lm 6400K 220-240V IP65 120° 1,2m EM 3h

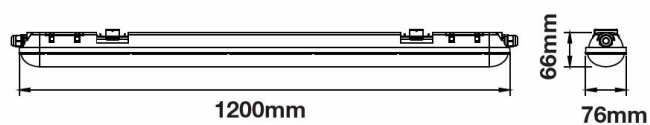

Tablica artikla

OPIS	KAT. BROJ
36W 2880lm 6400K 220-240V IP65 120° 1,2m EM 3h Battery Ni-Cd 9.6V 2200mAh, 7W in emergency mode	LIVT6449