


Tehnički list za artikl: **NLAIEW09EL**

Svjet.design AI LED bijela 230VAC/ DC, montaža u strop

Centrally switchable, with single lamp supervision, Viewing distance: 15m, 230V AC/DC, recessed mounting with adapter frame in switch box Ø68mm

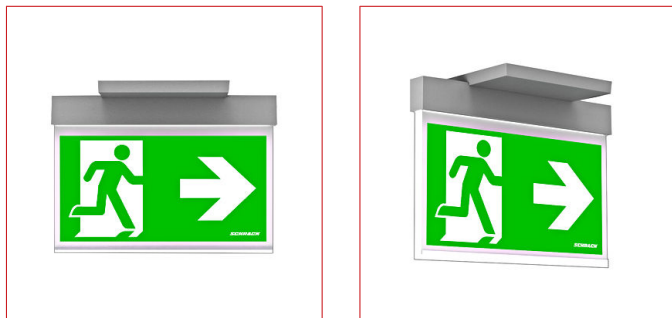


Tehnički podaci

Neto duljina (mm)	167,00
Neto širina (mm)	92,00
Neto visina (mm)	159,00
Neto masa (kg)	0,80
Vrsta svjetiljke	Panik svjetiljka
VB/CPS	Za centralni panik sustav (CPS)
Funkcija	S nadzorom - centralno ON/OFF
Izvedba/tip	Plosnate svjetiljke
Dizajn	AI
Boja	RAL 9003 (bijela)
Piktogram	Slide-in pictogram set (arrow left, right, bottom, top and white foil for single side use) included in accordance with ISO 7010
Područje detekcije (m)	15
Izvor svjetla	LED (1.5W)
Naponsko područje (V)	230V AC 50Hz ±20%; 230V DC ±20%
Power maintained mode (W)	2,25
Power non-maintained mode (W)	0,70
Power max. (W)	2,25
IP stupanj zaštite	IP40
Otpornost na udarce	≥ IK03
Način montaže	Stropna ugradna

Tehnički podaci - nastavak

Min. temperatura okoline (°C)	-5
Maks. temperatura okoline (°C)	40
AA Klasa E 8101	AA4
Proizvođač	Schrack

Dimensions (mm)

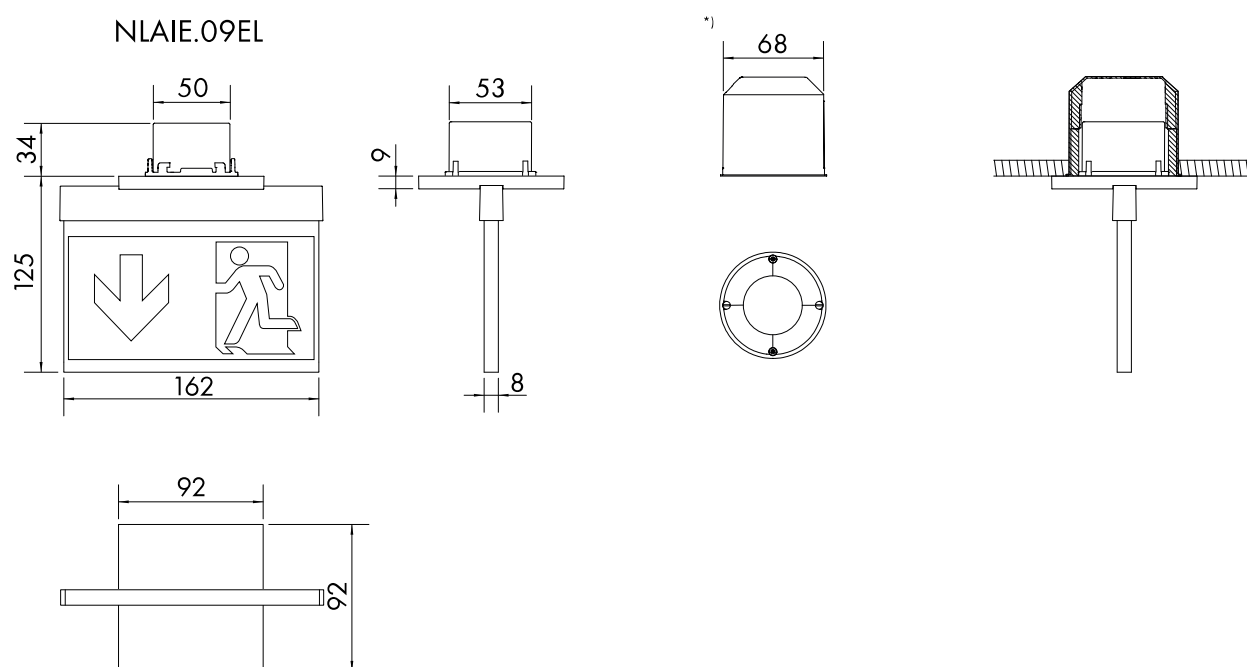

OPIS	KAT. BROJ
------	-----------

Svjet.design AI LED bijela 230VAC/DC, montaža u strop

Centrally switchable, with single lamp supervision, Viewing distance: 15m, 230V AC/DC, recessed mounting with adapter frame in NLAIEW09EL switch box Ø68mm