

Tehnički list za artikl: NLAMCCE03W

AM LED 3h na saje WL Panika; inox, 230VAC

Stainless steel look, Viewing distance: 22m, Cord suspension: standard length 1500mm (shortenable), radio switchable




Tehnički podaci

Neto duljina (mm)	241,00
Neto širina (mm)	80,00
Neto visina (mm)	214,00
Neto masa (kg)	1,15
Vrsta svjetiljke	Panik svjetiljka
VB/CPS	Sa vlastitom baterijom
Funkcija	WirelessControl Professional
Izvedba/tip	Plosnate svjetiljke
Dizajn	AM
Boja	Inox - optik
Piktogram	Slide-in pictogram set (arrow left, right, bottom, top and white foil for single side use) included in accordance with ISO 7010
Područje detekcije (m)	22
Vrijeme autonomije (h)	3
Izvor svjetla	LED (2W)

Tehnički podaci - nastavak

Naponsko područje (V)	230V AC 50Hz ±20%
Power maintained mode (W)	3,50
Power non-maintained mode (W)	0,80
Power max. (W)	4,70
Baterija (V/Ah)	2x3,2/1,2 LiFePO4
IP stupanj zaštite	IP40
Otpornost na udarce	≥ IK03
Način montaže	Ovjesna (uže) ugradna
Min. temperatura okoline (°C)	-5
Maks. temperatura okoline (°C)	40
AA Klasa E 8101	AA4
Proizvođač	Schrack

Dimensions (mm)

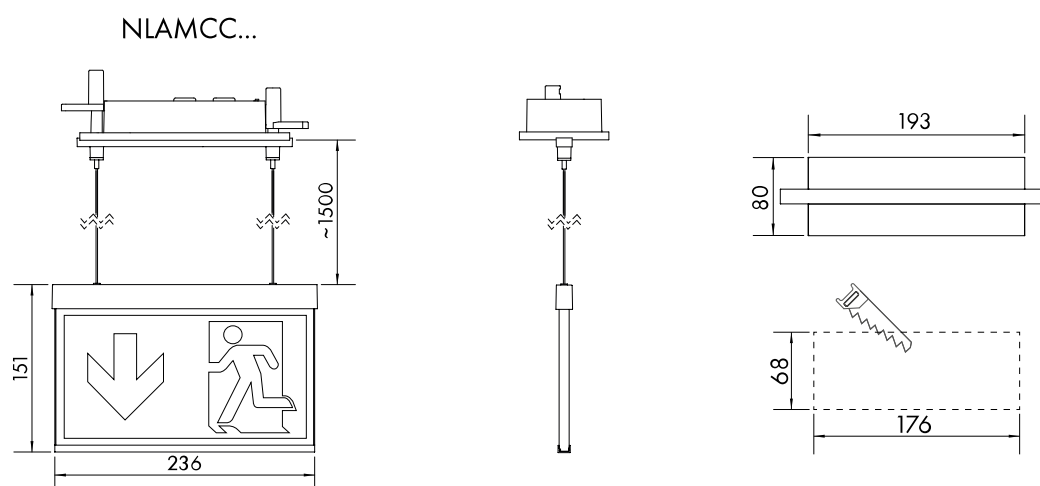

Tablica artikla

OPIS	KAT. BROJ
AM LED 3h na sajle WL Panika; inox, 230VAC	NLAMCCE03W
Stainless steel look, Viewing distance: 22m, Cord suspension: standard length 1500mm (shortenable), radio switchable	
Dodatni pribor	
Ugradni-piktogram lijevo-gore za design AM, KMB, KS, VM	NLAMPIKTLO
viewing distance: 22m	

Tablica artikla

OPIS	KAT. BROJ
Dodatni pribor	
Ugradni-piktogram lijevo-dolje za design AM, KMB, KS, VM viewing distance: 22m	NLAMPIKTLU
Ugradni-piktogram desno-gore za design AM, KMB, KS, VM viewing distance: 22m	NLAMPIKTRO
Ugradni-piktogram desno-dolje za design AM, KMB, KS, VM viewing distance: 22m	NLAMPIKTRU
Set piktograma "POŽAR" 2x4kom 22m sukladno ISO7010 pictographs according to ISO 7010 included: fire extinguisher, fire hose reel, fire alarm call point, collection of firefighting equipment, suitable for design KS, AM, KB	NLKS4FIRE
Set piktograma "PRVA POMOĆ" 2x4kom 22m sukladno ISO7010 pictographs according to ISO 7010 included: first aid, Hazard duty point, Automated heart defibrillator, emergency window with escape ladder, suitable for design KS, AM, KB	NLKS4HELP
Kutija za ugradnju u beton svjetiljke design AM/AX	NLAMAXBE
Set 2x bat LiFePO4 3,2V 1,2Ah za WirelessControl svjetiljke LiFePO4 - Litij Željezo Fosfat baterija, norma UN3480	NLAKKU321L
	NLTESTSC2
Zaštitni poklopac za testne tipke NLTEST2	NLTEST2COV