

Tehnički list za artikl: NLAMDTA09E

# Svjet.design AM LED EL 230VAC/DC DUO antracit ovjes strop

Centrally switchable, with single lamp supervision, viewing distance: 22m, 230V AC/DC, Cord suspension: standard length 1500mm (shortenable), with additional LED spot for safety illumination in emergency mode, 140lm




## Tehnički podaci

|                   |                                                                          |
|-------------------|--------------------------------------------------------------------------|
| Neto duljina (mm) | 241,00                                                                   |
| Neto širina (mm)  | 80,00                                                                    |
| Neto visina (mm)  | 184,00                                                                   |
| Neto masa (kg)    | 1,15                                                                     |
| Vrsta svjetiljke  | Kombinirana svjetiljka sa piktogramom i osvjetljenjem evakuacijskog puta |
| VB/CPS            | Za centralni panik sustav (CPS)                                          |
| Funkcija          | S nadzorom - centralno ON/OFF                                            |
| Izvedba/tip       | Plosnate svjetiljke                                                      |
| Dizajn            | AM                                                                       |
| Boja              | RAL 7016 (antracit)                                                      |

## Tehnički podaci - nastavak

|                                |                                                                                                                                 |
|--------------------------------|---------------------------------------------------------------------------------------------------------------------------------|
| Piktogram                      | Slide-in pictogram set (arrow left, right, bottom, top and white foil for single side use) included in accordance with ISO 7010 |
| Područje detekcije (m)         | 20                                                                                                                              |
| Izvor svjetla                  | LED (2W)<br>ERT-LED (1W)                                                                                                        |
| Lumen                          | 140                                                                                                                             |
| Naponsko područje (V)          | 230V AC 50Hz ±20%; 230V DC ±20%                                                                                                 |
| Power maintained mode (W)      | 3,10                                                                                                                            |
| Power non-maintained mode (W)  | 1,10                                                                                                                            |
| Power max. (W)                 | 4,20                                                                                                                            |
| IP stupanj zaštite             | IP40                                                                                                                            |
| Otpornost na udarce            | ≥ IK03                                                                                                                          |
| Način montaže                  | Ovjesna (uže) nadgradna                                                                                                         |
| Min. temperatura okoline (°C)  | -5                                                                                                                              |
| Maks. temperatura okoline (°C) | 40                                                                                                                              |
| AA Klasa E 8101                | AA4                                                                                                                             |
| Proizvođač                     | Schrack                                                                                                                         |

## Dimensions (mm)

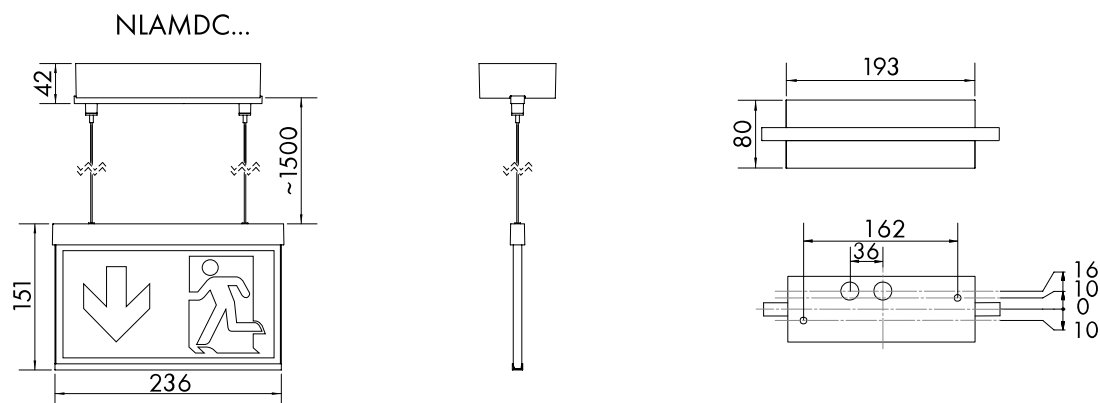

## Spacing table - Min. illuminance on the center line +/- 0.5 m: 1 lx - Maintenance factor 0.80

|  |  |  |  |  |  |
|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| 2,00                                                                              | 3,86                                                                              | 8,79                                                                              | 6,13                                                                              | 3,19                                                                                | 1,41                                                                                |
| 2,50                                                                              | 2,85                                                                              | 9,62                                                                              | 6,47                                                                              | 3,70                                                                                | 1,56                                                                                |
| 3,00                                                                              | 3,12                                                                              | 9,84                                                                              | 5,76                                                                              | 4,11                                                                                | 1,61                                                                                |
| 3,50                                                                              | 3,32                                                                              | 10,35                                                                             | 6,26                                                                              | 4,41                                                                                | 1,48                                                                                |
| 4,00                                                                              | 3,46                                                                              | 8,75                                                                              | 6,65                                                                              | 4,55                                                                                | 1,22                                                                                |

## Tablica artikla

| OPIS                                                                                                                                                                                                                                    | KAT. BROJ  |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|
| Svjet.design AM LED EL 230VAC/DC DUO antracit ovjes strop                                                                                                                                                                               |            |
| Centrally switchable, with single lamp supervision, viewing distance: 22m, 230V AC/DC, Cord suspension: standard length 1500mm (shortenable), with additional LED spot for safety illumination in emergency mode, 140lm                 | NLAMDTA09E |
| <b>Dodatni pribor</b>                                                                                                                                                                                                                   |            |
| Ugradni-piktogram lijevo-gore za design AM, KMB, KS, VM<br>viewing distance: 22m                                                                                                                                                        | NLAMPIKTLO |
| Ugradni-piktogram lijevo-dolje za design AM, KMB, KS, VM<br>viewing distance: 22m                                                                                                                                                       | NLAMPIKTLU |
| Ugradni-piktogram desno-gore za design AM, KMB, KS, VM<br>viewing distance: 22m                                                                                                                                                         | NLAMPIKTRO |
| Ugradni-piktogram desno-dolje za design AM, KMB, KS, VM<br>viewing distance: 22m                                                                                                                                                        | NLAMPIKTRU |
| Set piktograma "POŽAR" 2x4kom 22m sukladno ISO7010<br>pictographs according to ISO 7010 included: fire extinguisher, fire hose reel, fire alarm call point, collection of firefighting equipment, suitable for design KS, AM, KB        | NLKS4FIRE  |
| Set piktograma "PRVA POMOĆ" 2x4kom 22m sukladno ISO7010<br>pictographs according to ISO 7010 included: first aid, Hazard duty point, Automated heart defibrillator, emergency window with escape ladder, suitable for design KS, AM, KB | NLKS4HELP  |
| Površinski adapter za svjetiljke design AM/AX, boja antracit<br>anthracite, for lateral cable entry                                                                                                                                     | NLAMAXAPAA |