

Tehnički list za artikl: NLAMRA403S

Autonomna sigurnosna svjetiljka AM LED 3h zidna ugradna

anthracite, 1h/3h/8h adjustable, LiFePO₄ battery




Tehnički podaci

Neto duljina (mm)	241,00
Neto širina (mm)	79,00
Neto visina (mm)	151,00
Neto masa (kg)	1,15
Vrsta svjetiljke	Panik svjetiljka
VB/CPS	Sa vlastitom baterijom
Funkcija	Samokontrola
Izvedba/tip	Plosnate svjetiljke
Dizajn	AM
Boja	RAL 7016 (antracit)
Piktogram	Slide-in pictogram set (arrow left, right, bottom, top and white foil for single side use) included in accordance with ISO 7010
Područje detekcije (m)	22
Izvor svjetla	LED (2W)

Tehnički podaci - nastavak

Naponsko područje (V)	230V AC 50Hz ±20%
Power maintained mode (W)	3,30
Power non-maintained mode (W)	0,90
Power max. (W)	4,20
Baterija (V/Ah)	2x3,2/1,2 LiFePO4
IP stupanj zaštite	IP40
Otpornost na udarce	≥ IK03
Način montaže	Zidna ugradna
Min. temperatura okoline (°C)	-5
Maks. temperatura okoline (°C)	40
AA Klasa E 8101	AA4
Proizvođač	Schrack

Dimensions (mm)

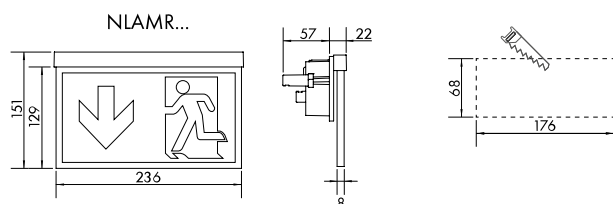

Tablica artikla

OPIS	KAT. BROJ
Autonoma sigurnosna svjetiljka AM LED 3h zidna ugradna anthracite, 1h/3h/8h adjustable, LiFePO4 battery	NLAMRA403S
Dodatni pribor	
Ugradni-piktogram lijevo-gore za design AM, KMB, KS, VM viewing distance: 22m	NLAMPIKTLO
Ugradni-piktogram lijevo-dolje za design AM, KMB, KS, VM viewing distance: 22m	NLAMPIKTLU
Ugradni-piktogram desno-gore za design AM, KMB, KS, VM viewing distance: 22m	NLAMPIKTRO
Ugradni-piktogram desno-dolje za design AM, KMB, KS, VM viewing distance: 22m	NLAMPIKTRU

Tablica artikla

OPIS	KAT. BROJ
Dodatni pribor	
Set piktograma "POŽAR" 2x4kom 22m sukladno ISO7010 pictographs according to ISO 7010 included: fire extinguisher, fire hose reel, fire alarm call point, collection of firefighting equipment, suitable for design KS, AM, KB	NLKS4FIRE
Kutija za ugradnju u beton svjetiljke design AM/AX	NLAMAXBE
Set 2x bat LiFePO4 3,2V 1,2Ah za WirelessControl svjetiljke LiFePO4 - Litij Željezo Fosfat baterija, norma UN3480	NLAKKU321L
	NLTESTSC2
Zaštitni poklopac za testne tipke NLTEST2	NLTEST2COV