

Tehnički list za artikl: NLAMRA403W

# Sigur.svje. AM Wireless 3h bat. LiFePO4 ugradnja u zid

Desing AM HP-LED 2W 3h Wireless -bežični sustav, raspoznatljivost 22m, boja antracit, ugradnjana u zid, baterija LiFePO4, bežično centralno isključivanje uključivane




## Tehnički podaci

|                        |                                                                                                                                 |
|------------------------|---------------------------------------------------------------------------------------------------------------------------------|
| Neto duljina (mm)      | 241,00                                                                                                                          |
| Neto širina (mm)       | 79,00                                                                                                                           |
| Neto visina (mm)       | 151,00                                                                                                                          |
| Neto masa (kg)         | 1,15                                                                                                                            |
| Vrsta svjetiljke       | Panik svjetiljka                                                                                                                |
| VB/CPS                 | Sa vlastitom baterijom                                                                                                          |
| Funkcija               | WirelessControl Professional                                                                                                    |
| Izvedba/tip            | Plosnate svjetiljke                                                                                                             |
| Dizajn                 | AM                                                                                                                              |
| Boja                   | RAL 7016 (antracit)                                                                                                             |
| Piktogram              | Slide-in pictogram set (arrow left, right, bottom, top and white foil for single side use) included in accordance with ISO 7010 |
| Područje detekcije (m) | 22                                                                                                                              |

## Tehnički podaci - nastavak

|                                |                   |
|--------------------------------|-------------------|
| Vrijeme autonomije (h)         | 3                 |
| Izvor svjetla                  | LED (2W)          |
| Naponsko područje (V)          | 230V AC 50Hz ±20% |
| Power maintained mode (W)      | 3,50              |
| Power non-maintained mode (W)  | 0,80              |
| Power max. (W)                 | 4,70              |
| Baterija (V/Ah)                | 2x3,2/1,2 LiFePO4 |
| IP stupanj zaštite             | IP40              |
| Otpornost na udarce            | ≥ IK03            |
| Način montaže                  | Zidna ugradna     |
| Min. temperatura okoline (°C)  | -5                |
| Maks. temperatura okoline (°C) | 40                |
| AA Klasa E 8101                | AA4               |
| Proizvođač                     | Schrack           |

## Dimensions (mm)

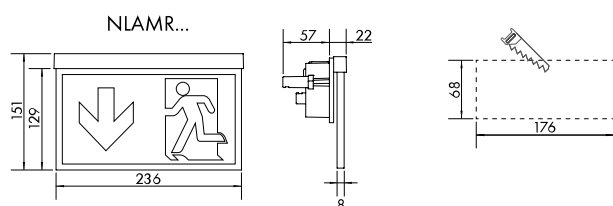

## Tablica artikla

| OPIS                                                                                                                                                                  | KAT. BROJ  |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|
| Sigur.svj. AM Wireless 3h bat. LiFePO4 ugradnja u zid                                                                                                                 |            |
| Desing AM HP-LED 2W 3h Wireless -bežični sustav, raspoznatljivost 22m, boja antracit, ugradnjana u zid, baterija LiFePO4, bežično centralno isključivanje uključivane | NLAMRA403W |
| <b>Dodatni pribor</b>                                                                                                                                                 |            |
| Ugradni-piktogram lijevo-gore za design AM, KMB, KS, VM<br>viewing distance: 22m                                                                                      | NLAMPIKTLO |
| Ugradni-piktogram lijevo-dolje za design AM, KMB, KS, VM<br>viewing distance: 22m                                                                                     | NLAMPIKTLU |
| Ugradni-piktogram desno-gore za design AM, KMB, KS, VM<br>viewing distance: 22m                                                                                       | NLAMPIKTRO |

## Tablica artikla

| OPIS                                                                                                                                                                                                                                | KAT. BROJ  |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|
| <b>Dodatni pribor</b>                                                                                                                                                                                                               |            |
| Ugradni-piktogram desno-dolje za design AM, KMB, KS, VM<br>viewing distance: 22m                                                                                                                                                    | NLAMPIKTRU |
| Set piktograma "POŽAR" 2x4kom 22m sukladno ISO7010<br>pictographs according to ISO 7010 included: fire extinguisher, fire hose reel, fire alarm call point, collection of firefighting<br>equipment, suitable for design KS, AM, KB | NLKS4FIRE  |
| Kutija za ugradnju u beton svjetiljke design AM/AX                                                                                                                                                                                  | NLAMAXBE   |
| Set 2x bat LiFePO4 3,2V 1,2Ah za WirelessControl svjetiljke<br>LiFePO4 - Litij Željezo Fosfat baterija, norma UN3480                                                                                                                | NLAKKU321L |
|                                                                                                                                                                                                                                     | NLTESTSC2  |
| Zaštitni poklopac za testne tipke NLTEST2                                                                                                                                                                                           | NLTEST2COV |