

Tehnički list za artikl: NLAMWA403W

Sigur.svje. AM LED Wireless 3h bat. LiFePO4 ugradnja na zid

Desing AM HP-LED 2W 3h Wireless -bežični sustav, raspoznatljivost 22m, boja antracit, ugradnjana na zid, baterija LiFePO4, bežično centralno isključivanje uključivane




Tehnički podaci

Neto duljina (mm)	241,00
Neto širina (mm)	50,00
Neto visina (mm)	151,00
Neto masa (kg)	1,15
Vrsta svjetiljke	Panik svjetiljka
VB/CPS	Sa vlastitom baterijom
Funkcija	WirelessControl Professional
Izvedba/tip	Plosnate svjetiljke
Dizajn	AM
Boja	RAL 7016 (antracit)
Piktogram	Slide-in pictogram set (arrow left, right, bottom, top and white foil for single side use) included in accordance with ISO 7010
Područje detekcije (m)	22

Tehnički podaci - nastavak

Vrijeme autonomije (h)	3
Izvor svjetla	LED (2W)
Naponsko područje (V)	230V AC 50Hz ±20%
Power maintained mode (W)	3,50
Power non-maintained mode (W)	0,80
Power max. (W)	4,70
Baterija (V/Ah)	2x3,2/1,2 LiFePO4
IP stupanj zaštite	IP40
Otpornost na udarce	≥ IK03
Način montaže	Stropna
Min. temperatura okoline (°C)	-5
Maks. temperatura okoline (°C)	40
AA Klasa E 8101	AA4
Proizvođač	Schrack

Dimensions (mm)

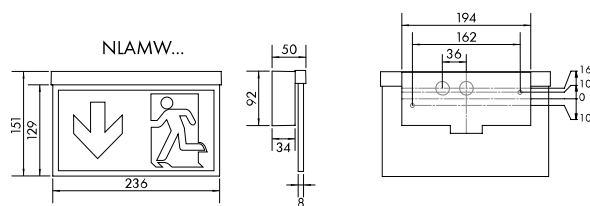

Tablica artikla

OPIS	KAT. BROJ
Sigur.svje. AM LED Wireless 3h bat. LiFePO4 ugradnja na zid	
Desing AM HP-LED 2W 3h Wireless -bežični sustav, raspoznatljivost 22m, boja antracit, ugradnjana na zid, baterija LiFePO4, bežično centralno isključivanje uključivane	NLAMWA403W
Dodatni pribor	
Ugradni-piktogram lijevo-gore za design AM, KMB, KS, VM viewing distance: 22m	NLAMPIKTLO
Ugradni-piktogram lijevo-dolje za design AM, KMB, KS, VM viewing distance: 22m	NLAMPIKTLU
Ugradni-piktogram desno-gore za design AM, KMB, KS, VM viewing distance: 22m	NLAMPIKTRO

Tablica artikla

OPIS	KAT. BROJ
Dodatni pribor	
Ugradni-piktogram desno-dolje za design AM, KMB, KS, VM viewing distance: 22m	NLAMPIKTRU
Set piktograma "POŽAR" 2x4kom 22m sukladno ISO7010 pictographs according to ISO 7010 included: fire extinguisher, fire hose reel, fire alarm call point, collection of firefighting equipment, suitable for design KS, AM, KB	NLKS4FIRE
Kutija za ugradnju u beton svjetiljke design AM/AX	NLAMAXBE
Set 2x bat LiFePO4 3,2V 1,2Ah za WirelessControl svjetiljke LiFePO4 - Litij Željezo Fosfat baterija, norma UN3480	NLAKKU321L
	NLTESTSC2
Zaštitni poklopac za testne tipke NLTEST2	NLTEST2COV