

Tehnički list za artikl: NLAMWTW09E

Svjet.design AM LED EL 230VAC/DC DUO bijela na zid

Centrally switchable, with single lamp supervision, viewing distance: 22m, 230V AC/DC, with additional LED spot for safety illumination in emergency mode, 140lm




Tehnički podaci

Neto duljina (mm)	241,00
Neto širina (mm)	50,00
Neto visina (mm)	151,00
Neto masa (kg)	1,15
Vrsta svjetiljke	Kombinirana svjetiljka sa piktogramom i osvjetljenjem evakuacijskog puta
VB/CPS	Za centralni panik sustav (CPS)
Funkcija	S nadzorom - centralno ON/OFF
Izvedba/tip	Plosnate svjetiljke
Dizajn	AM
Boja	RAL 9003 (bijela)
Piktogram	Slide-in pictogram set (arrow left, right, bottom, top and white foil for single side use) included in accordance with ISO 7010

Tehnički podaci - nastavak

Područje detekcije (m)	20
Izvor svjetla	LED (2W) ERT-LED (1W)
Lumen	140
Naponsko područje (V)	230V AC 50Hz ±20%; 230V DC ±20%
Power maintained mode (W)	3,10
Power non-maintained mode (W)	1,10
Power max. (W)	4,20
IP stupanj zaštite	IP40
Otpornost na udarce	≥ IK03
Način montaže	Stropna
Min. temperatura okoline (°C)	-5
Maks. temperatura okoline (°C)	40
AA Klasa E 8101	AA4
Proizvođač	Schrack

Dimensions (mm)

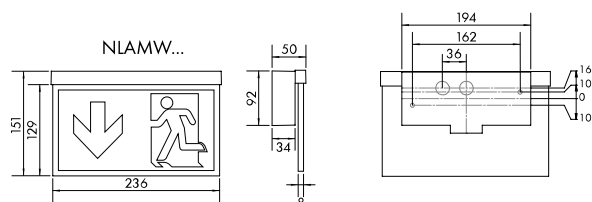

Spacing table - Min. illuminance on the center line +/- 0.5 m: 1 lx - Maintenance factor 0.80

					
2,00	0,72	2,95	2,88	4,50	1,90
2,50	0,89	3,34	3,32	5,09	2,10
3,00	1,05	3,68	3,69	5,59	2,28
3,50	1,19	4,03	4,04	6,01	2,42
4,00	1,33	4,25	4,26	6,38	2,53
5,00	1,54	4,69	4,64	6,92	2,60
6,00	1,70	5,02	4,84	7,28	2,40
7,00	1,73	4,94	4,80	7,37	1,86
8,00	1,30	5,19	4,39	7,11	0,96

Tablica artikla

OPIS	KAT. BROJ
Svjet.design AM LED EL 230VAC/DC DUO bijela na zid Centrally switchable, with single lamp supervision, viewing distance: 22m, 230V AC/DC, with additional LED spot for safety illumination in emergency mode, 140lm	NLAMWTW09E
Dodatni pribor	
Ugradni-piktogram lijevo-gore za design AM, KMB, KS, VM viewing distance: 22m	NLAMPIKTLO
Ugradni-piktogram lijevo-dolje za design AM, KMB, KS, VM viewing distance: 22m	NLAMPIKTLU
Ugradni-piktogram desno-gore za design AM, KMB, KS, VM viewing distance: 22m	NLAMPIKTRO
Ugradni-piktogram desno-dolje za design AM, KMB, KS, VM viewing distance: 22m	NLAMPIKTRU
Set piktograma "POŽAR" 2x4kom 22m sukladno ISO7010 pictographs according to ISO 7010 included: fire extinguisher, fire hose reel, fire alarm call point, collection of firefighting equipment, suitable for design KS, AM, KB	NLKS4FIRE
Set piktograma "PRVA POMOĆ" 2x4kom 22m sukladno ISO7010 pictographs according to ISO 7010 included: first aid, Hazard duty point, Automated heart defibrillator, emergency window with escape ladder, suitable for design KS, AM, KB	NLKS4HELP
Površinski adapter za svjetiljke design AM/AX, boja bijela white, for lateral cable entry	NLAMAXAPAW