

Tehnički list za artikl: NLAXDA09EL

Svjet.design AX LED antracit 230V AC/DC, montaža strop

Centrally switchable, with single lamp supervision, Viewing distance: 30m, 230V AC/DC




Tehnički podaci

Neto duljina (mm)	317,00
Neto širina (mm)	80,00
Neto visina (mm)	228,00
Neto masa (kg)	1,40
Vrsta svjetiljke	Panik svjetiljka
VB/CPS	Za centralni panik sustav (CPS)
Funkcija	S nadzorom - centralno ON/OFF
Izvedba/tip	Plosnate svjetiljke
Dizajn	AX
Boja	RAL 7016 (antracit)
Piktogram	Slide-in pictogram set (arrow left, right, bottom, top and white foil for single side use) included in accordance with ISO 7010
Područje detekcije (m)	30
Izvor svjetla	LED (3W)
Naponsko područje (V)	230V AC 50Hz ±20%; 230V DC ±20%
Power maintained mode (W)	4,50
Power non-maintained mode (W)	1,10
Power max. (W)	4,50
IP stupanj zaštite	IP40
Otpornost na udarce	≥ IK03
Način montaže	Stropna nadgradna
Min. temperatura okoline (°C)	-5

Tehnički podaci - nastavak

Maks. temperatura okoline (°C)	40
AA Klasa E 8101	AA4
Proizvođač	Schrack

Dimensions (mm)

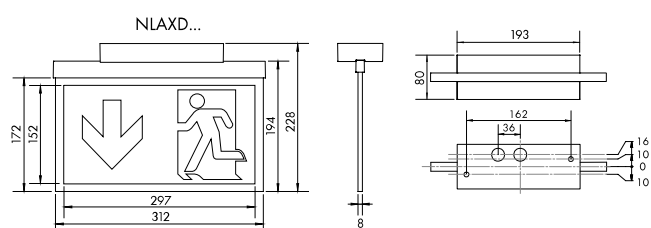

Tablica artikla

OPIS	KAT. BROJ
Svjet.design AX LED antracit 230V AC/DC, montaža strop Centrally switchable, with single lamp supervision, Viewing distance: 30m, 230V AC/DC	NLAXDA09EL
Dodatni pribor	
Površinski adapter za svjetiljke design AM/AX, boja antracit anthracite, for lateral cable entry	NLAMAXAPAA