

Tehnički list za artikl: NLDEQ023SC

Sig.svj.sa bat. DEQ Autotest ERT-LED

1h, 3h, 8h 230VAC ugradna


1h/3h/8h adjustable



Tehnički podaci

Neto duljina (mm)	270,00
Neto širina (mm)	90,00
Neto visina (mm)	110,00
Vrsta svjetiljke	Sigurnosna svjetiljka
VB/CPS	Sa vlastitom baterijom
Funkcija	Samokontrola
Izvedba/tip	Metalna zaštita od udara
Dizajn	DEQ
Boja	bijela
Vrijeme autonomije (h)	3
Izvor svjetla	ERT-LED (3W)
Lumen	1h: 300;3h: 180;8h: 84
Napon (V)	230V AC 50Hz ±20%
Baterija (V/Ah)	4,8/2,0 NiMH
IP stupanj zaštite	IP20
Način montaže	Stropna ugradna
AA Class E 8101	AA4

Dimensions (mm)

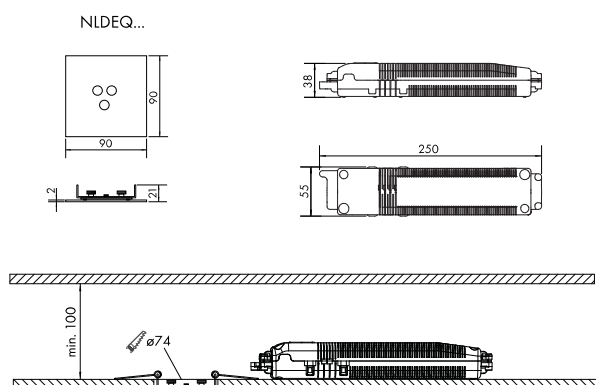

Distance table - min. illumination at the middle line: 1lx - maintenance factor 0,80 - 1h autonomy time

Montagehöhe [m]					
2	3,93	10,98	11,17	10,99	3,76
2,5	3,57	11,21	11,21	11,10	3,44
3	2,61	11,10	11,01	10,93	2,52
3,5	1,56	10,11	10,06	9,89	1,00
4	0,00	7,83	8,35	8,24	0

Distance table - min. illumination at the middle line: 1lx - maintenance factor 0,80 - 3h autonomy time

Montagehöhe [m]					
2,00	2,65	8,70	8,65	8,59	2,56
2,50	1,69	8,42	8,33	8,23	1,39
3,00	0,00	6,63	6,73	6,64	0,00
3,50	0,00	4,78	5,15	4,65	0,00
4,00	0,00	1,64	2,23	2,18	0,00

Tablica artikla

OPIS	KAT. BROJ
Sig.svj.sa bat. DEQ Autotest ERT-LED 1h,3h,8h 230VAC ugradna 1h/3h/8h adjustable	NLDEQ023SC
Dodatni pribor	
Baterija 4,8V 2,0Ah za svjet. sa vl. nap. LED sa LPU modulom LPU or LEM module	NLAKKU4820
Zaštitna mreža za Design IL, KI, VI, RI, KT, DAQ, DAR	NLBALL3