

Tehnički list za artikl: NLDOE023WL

Sig.svjetiljka DO 1x1W ERT-LED 3h 230VAC

Wireless ugradna

Recessed mounting, 140lm, radio switchable



Tehnički podaci


Neto duljina (mm)	53,00
Neto širina (mm)	26,00
Neto visina (mm)	30,00
Neto masa (kg)	0,40
Vrsta svjetiljke	Sigurnosna svjetiljka
VB/CPS	Sa vlastitom baterijom
Funkcija	WirelessControl Professional
Izvedba/tip	Plastične svjetiljke
Dizajn	DO
Bez halogena	Plastično kućište, bez halogena
Boja	prozirno
Vrijeme autonomije (h)	3
Izvor svjetla	ERT-LED (1W)
Lumen	140
Naponsko područje (V)	230V AC 50Hz ±20%
Power maintained mode (W)	5,20
Power non-maintained mode (W)	3,80
Power max. (W)	5,60
Baterija (V/Ah)	4,8/2,0 NiMh
IP stupanj zaštite	IP20
Otpornost na udarce	≥ IK03
Način montaže	Stropna ugradna

Tehnički podaci - nastavak

Min. temperatura okoline (°C)	-5
Maks. temperatura okoline (°C)	40
AA Klasa E 8101	AA4
Proizvođač	Schrack

Dimensions (mm)

NLDOE...

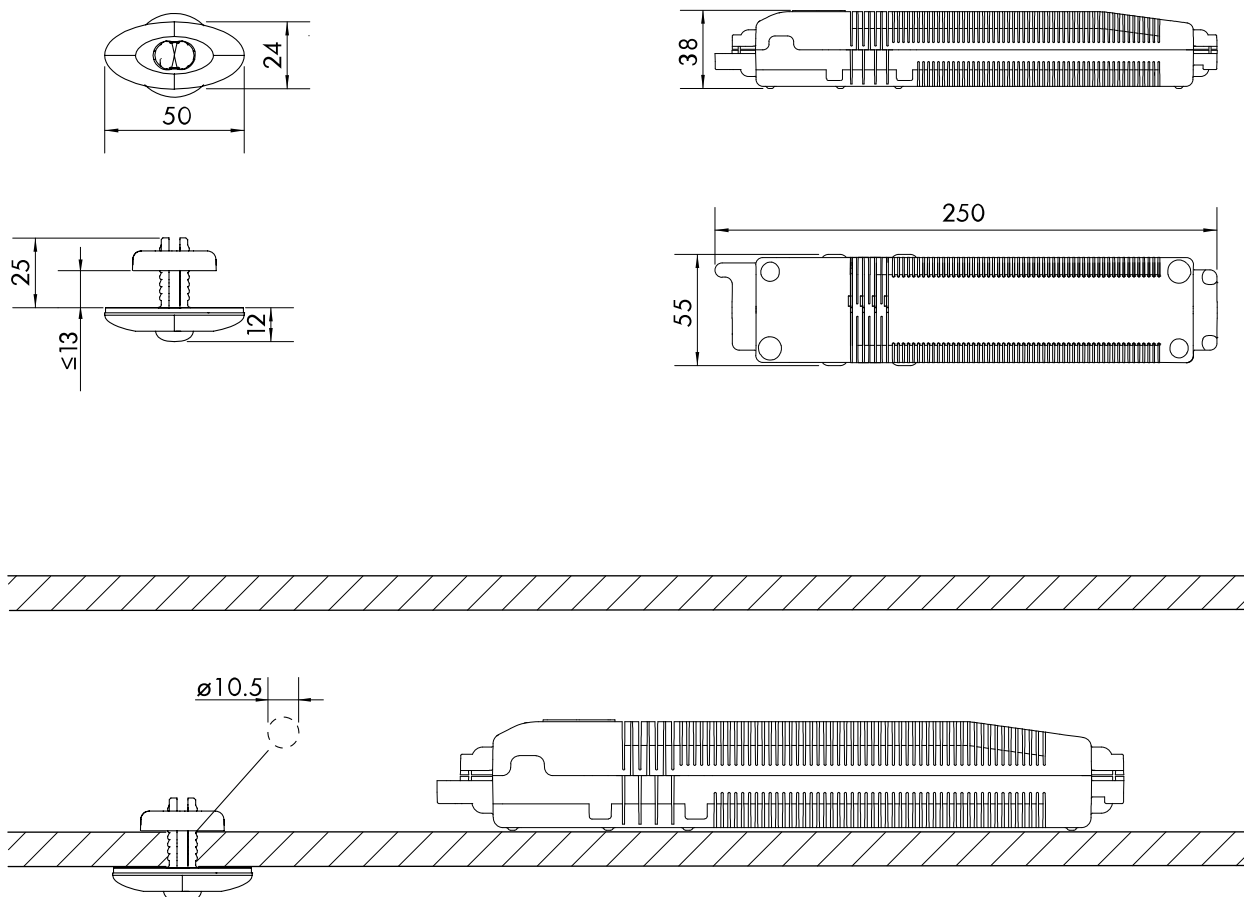

**Spacing table - Min. illuminance on the center line +/- 0.5 m: 1 lx -
Maintenance factor 0.80 - autonomy time 3h**

					
2,00	1,54	3,73	7,11	10,71	4,69
2,50	1,68	4,16	8,18	12,46	5,31
3,00	1,74	4,49	8,99	13,91	5,58
3,50	1,71	4,74	9,38	15,11	5,32
4,00	1,60	4,89	9,00	15,81	4,27
5,00	0,86	4,84	7,15	14,82	1,80

Tablica artikla

OPIS	KAT. BROJ
Sig.svjetiljka DO 1x1W ERT-LED 3h 230VAC Wireless ugradna Recessed mounting, 140lm, radio switchable	NLDOE023WL
Dodatni pribor	
Baterija 4,8V 2,0Ah za svjet. sa vl. nap. LED sa LPU modulom LPU or LEM module	NLAKKU4820