

Tehnički list za artikl: NLDOE029EL

Svjetiljka DO 3x1W ERT-LED 230V montaža na strop

with supervision - centrally switchable, 140lm



Tehnički podaci

Neto duljina (mm)	53,00
Neto širina (mm)	26,00
Neto visina (mm)	30,00
Neto masa (kg)	0,40
Vrsta svjetiljke	Sigurnosna svjetiljka
VB/CPS	Za centralni panik sustav (CPS)
Funkcija	S nadzorom - centralno ON/OFF
Izvedba/tip	Plastične svjetiljke
Dizajn	DO
Bez halogena	Plastično kućište, bez halogena
Boja	prozirno
Izvor svjetla	ERT-LED (1W)
Lumen	140
Naponsko područje (V)	230V AC 50Hz ±20%; 230V DC ±20%
Power maintained mode (W)	2,80
Power non-maintained mode (W)	1,10
Power max. (W)	2,80
IP stupanj zaštite	IP20
Način montaže	Stropna ugradna
Min. temperatura okoline (°C)	-20
Maks. temperatura okoline (°C)	40
AA Klasa E 8101	AA4


Tehnički podaci - nastavak

Proizvođač

Schrack

Dimensions (mm)

NLDOE...

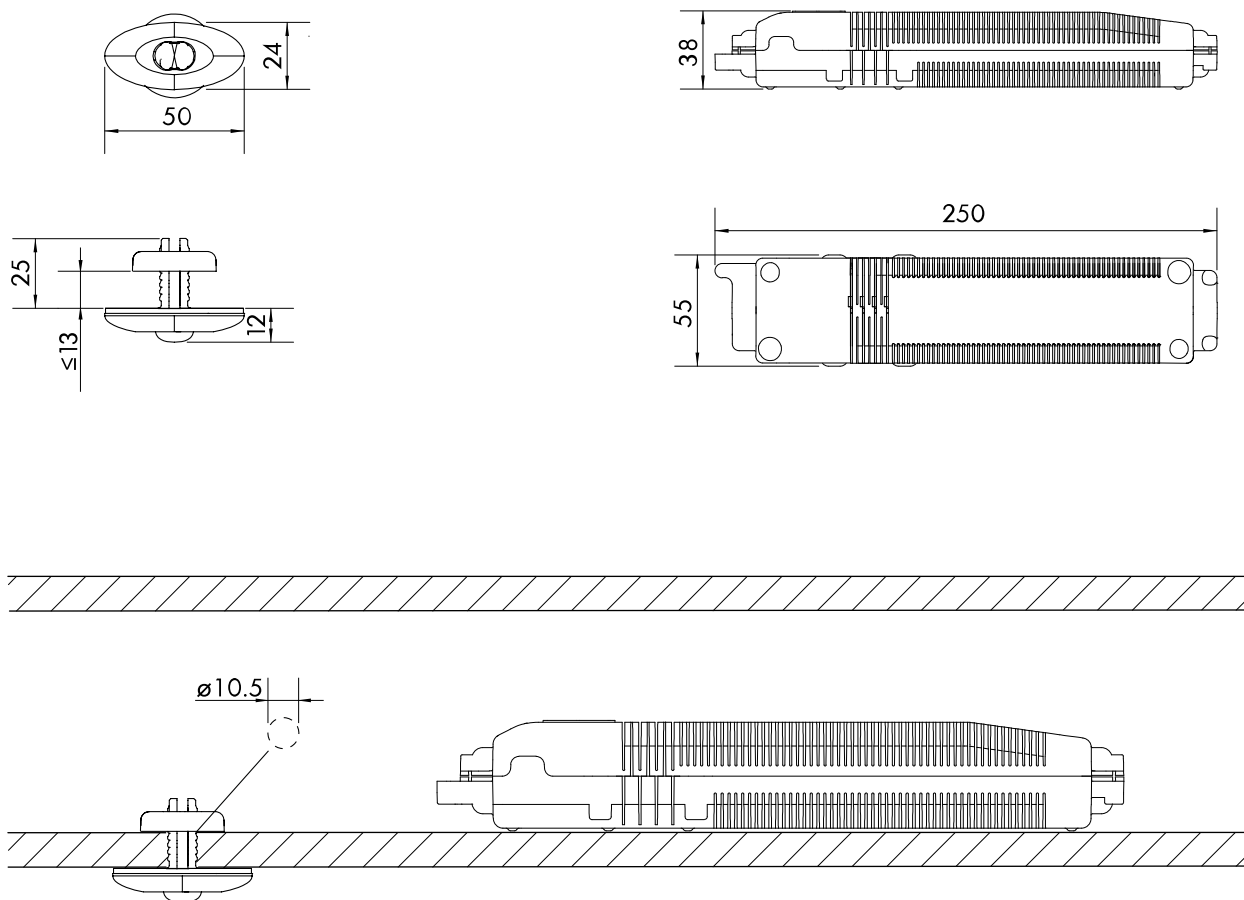

Spacing table - Min. illuminance on the center line +/- 0.5 m: 1 lx - Maintenance factor 0.80

					
2,00	1,54	3,73	7,11	10,71	4,69
2,50	1,68	4,16	8,18	12,46	5,31
3,00	1,74	4,49	8,99	13,91	5,58
3,50	1,71	4,74	9,38	15,11	5,32
4,00	1,60	4,89	9,00	15,81	4,27
5,00	0,86	4,84	7,15	14,82	1,80

OPIS

KAT. BROJ

Svjetiljka DO 3x1W ERT-LED 230V montaža na strop
with supervision - centrally switchable, 140lm

NLDOE029EL