

Tehnički list za artikl: NLFLU030EL

Nužni LED reflektor FLU 30 W 230 V AC/DC EL

Kućište od tlačno lijevanog cinka, antracit boje, IP66, radna temperatura od -25 °C do +38 °C; s nadzorom (NLMU06BOX); mogućnost centralnog upravljanja; 5116 lm.





Tehnički podaci

Neto duljina (mm)	198,00
Neto visina (mm)	183,00
Neto dubina (mm)	37,00
Neto masa (kg)	4,70
Vrsta svjetiljke	Sigurnosna svjetiljka
VB/CPS	Za centralni panik sustav (CPS)
Funkcija	S nadzorom - centralno ON/OFF
Izvedba/tip	Metalna zaštita od udara
Dizajn	FLU
Boja	RAL 7016 (antracit)
Izvor svjetla	LED (30W)
Lumen	5116
Naponsko područje (V)	230V AC 50Hz ±20%; 230V DC ±20%
Power maintained mode (W)	31,50
Power non-maintained mode (W)	1,50

Tehnički podaci - nastavak

Power max. (W)	31,50
IP stupanj zaštite	IP66
Otpornost na udarce	IK08
Način montaže	Stropna
Min. temperatura okoline (°C)	-25
Maks. temperatura okoline (°C)	38
AA Klasa E 8101	AA3 AA4 AA5
Proizvođač	Schrack

Dimensions (mm)

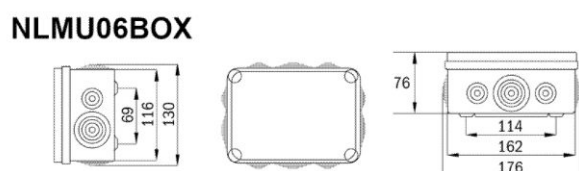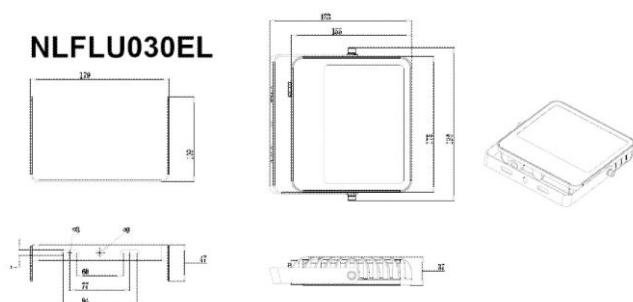

Spacing table - Min. illuminance on the center line +/- 0.5 m: 1 lx - Maintenance factor 0.80

					
2,00	2,73	5,7	5,7	5,7	2,73
2,50	3,42	7,12	7,12	7,12	3,42
3,00	4,1	8,55	8,55	8,55	4,1
3,50	4,79	9,97	9,97	9,97	4,79
4,00	5,47	11,4	11,4	11,4	5,47
5,00	6,84	14,25	14,25	14,25	6,84
6,00	8,21	17,1	17,1	17,1	8,21
7,00	9,58	19,95	19,95	19,95	9,58
8,00	10,74	22,53	22,53	22,53	10,74
9,00	11,81	25,01	25,01	25,01	11,81
10,00	12,83	27,4	27,4	27,4	12,83
12,00	14,69	31,89	31,89	31,89	14,69
14,00	16,36	36,03	36,03	36,03	16,36
16,00	17,9	39,83	39,83	39,83	17,9

OPIS

KAT. BROJ

Nužni LED reflektor FLU 30 W 230 V AC/DC EL

Kućiste od tlačno lijevanog cinka, antracit boje, IP66, radna temperatura od -25 °C do +38 °C; s nadzorom (NLMU06BOX); mogućnost centralnog upravljanja; 5116 lm.

NLFLU030EL