

Tehnički list za artikl: NLILDF028W

Design IL ERT-LED 1x3W 230VAC 8h bežična, usmjerena, stropna


White, surface ceiling mounting, Security luminaire to illuminate rescue path with luminaire distance 11,4m at mounting height 4m, central switching




Tehnički podaci

Neto visina (mm)	36,00
Neto promjer (mm)	99,00
Neto masa (kg)	0,25
Vrsta svjetiljke	Sigurnosna svjetiljka
VB/CPS	Sa vlastitom baterijom
Funkcija	Wireless control
Izvedba/tip	Plastične svjetiljke
Dizajn	IL
Bez halogena	Plastično kućište, bez halogena
Boja	bijela
Vrijeme autonomije (h)	8
Izvor svjetla	ERT-LED (3W)
Lumen	110
Napon (V)	230V AC 50Hz ±20%
Baterija (V/Ah)	4,8/2,0 NiMH
IP stupanj zaštite	IP20
Način montaže	Stropna nadgradna
Min. temperatura okoline (°C)	-5
Maks. temperatura okoline (°C)	30
AA Class E 8101	AA4


Dimensions NLILD... (mm)

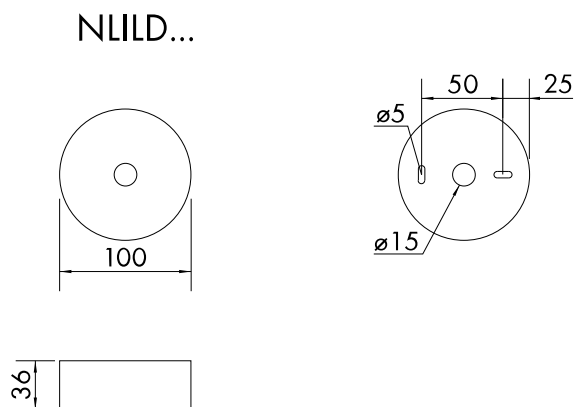


Dimensions accessoires NLILIP65 (mm)

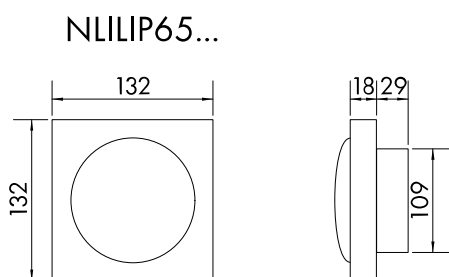


Dimensions accessoires Zinc die-cast housing NLEA.. (mm)

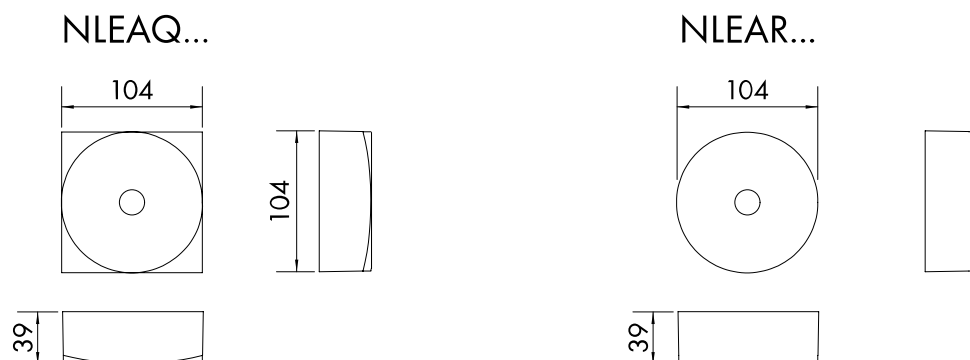

Mjerne skice: Design IL ERT-LED 1x3W 230VAC 8h bežična, usmjerena, stropna

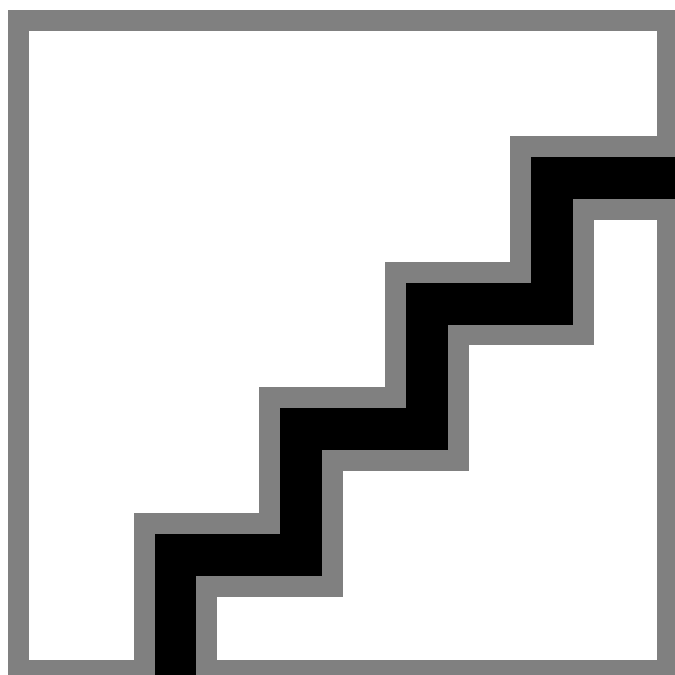

Dimensions recessed frame NLILDE (mm)

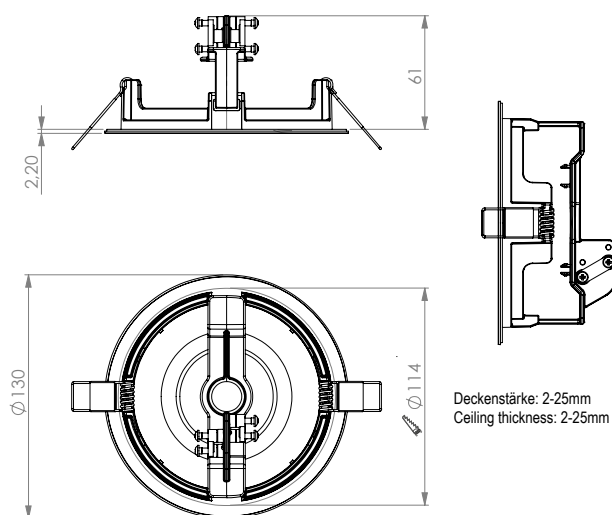

Distance table - min. illumination at the middle line: 1lx - maintenance factor 0,80 -8h autonomy time

Montagehöhe [m]					
2,00	1,30	3,89	9,20	15,02	5,49
2,50	1,11	3,88	9,03	16,15	4,91
3,00	0,86	3,71	8,25	15,93	3,22
3,50	0,00	3,32	6,31	14,34	0,00
4,00	0,00	2,80	5,22	11,53	0,00

Tablica artikla

OPIS	KAT. BROJ
Design IL ERT-LED 1x3W 230VAC 8h bežična, usmjerena, stropna White, surface ceiling mounting, Security luminaire to illuminate rescue path with luminaire distance 11,4m at mounting height 4m, central switching	NLILDF028W
Dodatni pribor	
Dodatno kvadratno kućište tip B1 za svjetiljku NLILD	NLILB1
Dodatno kvadratno kućište tip B2 za svjetiljku NLILD	NLILB2
Natično okruglo kućište bijelo za NLILD, cink metalno Universal ceiling mounting cover for the luminaires NLILDR.. NLILDF.. or NLILDS	NLEAR
Natično okruglo kućište antracit za NLILD, cink metalno Universal ceiling mounting cover for the luminaires NLILDR.. NLILDF.. or NLILDS	NLEARAZ
Natično kvadratno kućište B1 bijelo za NLILD, cink metalno Universal ceiling mounting cover for the luminaires NLILDR.. NLILDF.. or NLILDS	NLEAQ
Natično kvadratno kućište B1 antracit za NLILD, cink metalno Universal ceiling mounting cover for the luminaires NLILDR.. NLILDF.. or NLILDS	NLEAQAZ
Adapter ploča za bočno kabliranje svjetiljke NLILD	NLILDAPA
Zaštitna mreža za Design IL, KI, VI, RI, KT, DAQ, DAR	NLBALL3
Nadžbukno kućište IP65 za svjetiljke tip IL Suitable for ceiling mounted emergency luminaires NLILD.., zinc die-cast, IK10, including spacer plate	NLILIP65W
Baterija 4,8V 2,0Ah za svjet. sa vl. nap. LED sa LPU modulom LPU or LEM module	NLAKKU4820