

Tehnički list za artikl: NLILEF029E

Svjetlika IL 1x3W ERT-LED 230V, radialno osvjetlje., u strop


White, recessed ceiling mounting, safety luminaire for lightning areas with luminaire distance 27m at a room height of 6m, with supervision - centrally switchable



Tehnički podaci

Neto visina (mm)	90,00
Neto promjer (mm)	122,00
Neto masa (kg)	0,35
Vrsta svjetiljke	Sigurnosna svjetiljka
VB/CPS	Za centralni panik sustav (CPS)
Funkcija	S nadzorom - centralno ON/OFF
Izvedba/tip	Plastične svjetiljke
Dizajn	IL
Bez halogena	Plastično kućište, bez halogena
Boja	bijela
Izvor svjetla	ERT-LED (3W)
Lumen	360
Naponsko područje (V)	230V AC 50Hz ±20%; 230V DC ±20%
IP stupanj zaštite	IP20
Način montaže	Stropna ugradna
Min. temperatura okoline (°C)	-20
Maks. temperatura okoline (°C)	40
AA Klasa E 8101	AA4
Proizvođač	Schrack

Dimensions NLILE... (mm)

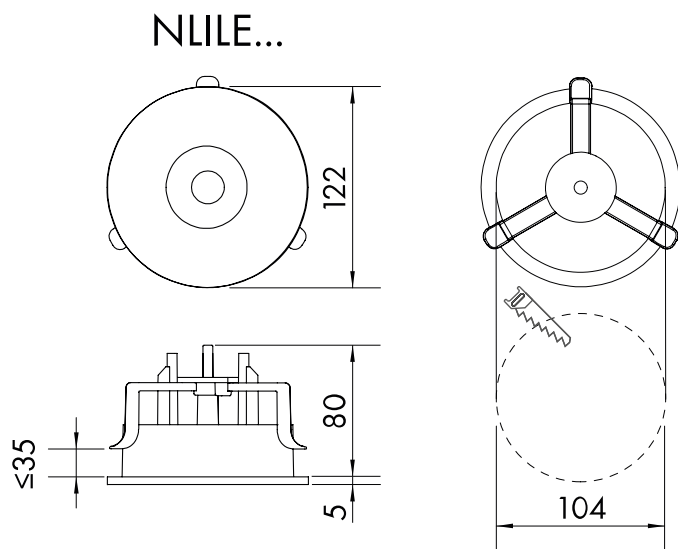

Distance table - min. illumination at the middle line: 1 lx - maintenance factor 0,80

Montagehöhe [m]					
2,00	2,30	6,19	12,64	19,15	8,02
2,50	2,41	6,52	14,11	21,89	9,33
3,00	2,43	6,80	15,42	24,37	9,81
3,50	2,45	7,00	16,34	26,62	10,16
4,00	2,31	7,09	16,66	28,11	9,42
6,00	1,28	6,40	13,14	27,10	5,04

Tablica artikla

OPIS	KAT. BROJ
Svjetlija IL 1x3W ERT-LED 230V, radialno osvjetlje., u strop White, recessed ceiling mounting, safety luminaire for lightning areas with luminaire distance 27m at a room height of 6m, with supervision - centrally switchable	NLILEF029E
Dodatni pribor	
Alat za lako otvaranje ugradnih svjetiljki tip IL	NLILTOOL
HSS Bi-metal cilindar pila (kruna), 105/36mm, bez adaptera	GI63290105
Zaštita od lopte od pleksija Dim 190x190x62mm, design IL/EA Thickness 5mm, recommended for NLIL.. surface mounted	NLBALLPLX4
Zaštitna mreža za Design IL, KI, VI, RI, KT, DAQ, DAR	NLBALL3
XL150 Ugradno kućište - s kratkim trafo tunelom dodatno naručiti odgovarajuću prednju stranu	GTDP870
Prednja ploča od mineralnih vlakana za mont. kućište XL150	GTDP874