

Tehnički list za artikl: NLILE028W

Design IL ERT-LED 1x3W 230VAC

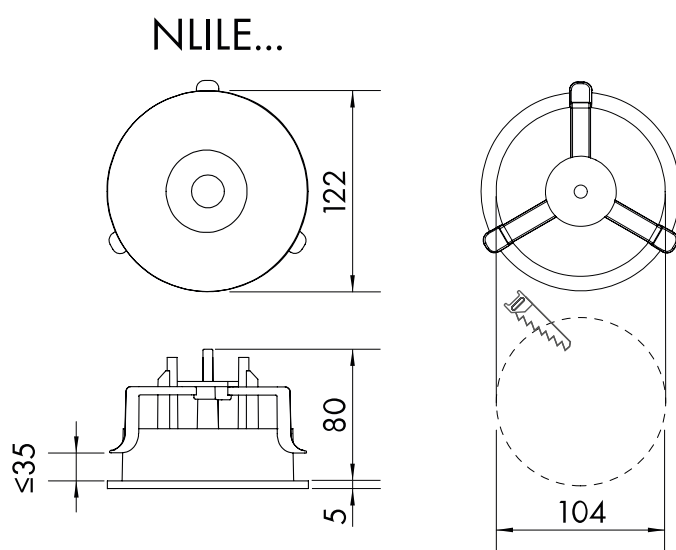
8h , bežična, SPOT, ugradna

White, recessed ceiling mounting, Hi-bay radial beam for space illumination of high halls with luminaire distance 6,9m at mounting height 8m, central switching



Tehnički podaci

Neto visina (mm)	95,00
Neto promjer (mm)	122,00
Neto masa (kg)	0,30
Vrsta svjetiljke	Sigurnosna svjetiljka
VB/CPS	Sa vlastitom baterijom
Funkcija	WirelessControl Professional
Izvedba/tip	Plastične svjetiljke
Dizajn	IL
Bez halogena	Plastično kućište, bez halogena
Boja	bijela
Vrijeme autonomije (h)	8
Izvor svjetla	ERT-LED (3W)
Lumen	110
Naponsko područje (V)	230V AC 50Hz ±20%
Baterija (V/Ah)	4,8/2,0 NiMH
IP stupanj zaštite	IP20
Način montaže	Stropna ugradna
Min. temperatura okoline (°C)	-5
Maks. temperatura okoline (°C)	30
AA Klasa E 8101	AA4

Dimensions NLILE... (mm)

Tablica artikla

OPIS	KAT. BROJ
Design IL ERT-LED 1x3W 230VAC 8h ,bežična, SPOT, ugradna White, recessed ceiling mounting, Hi-bay radial beam for space illumination of high halls with luminaire distance 6,9m at mounting height 8m, central switching	NLILES028W
Dodatni pribor	
Alat za lako otvaranje ugradnih svjetiljki tip IL	NLILTOOL
HSS Bi-metal cilindar pila (kruna), 105/36mm, bez adaptera	GI63290105
Zaštita od lopte od pleksija Dim 190x190x62mm, design IL/EA Thickness 5mm, recommended for NLIL.. surface mounted	NLBALLPLX4
Zaštitna mreža za Design IL, KI, VI, RI, KT, DAQ, DAR l x h x d: 200 x 200 x 90mm	NLBALL3
Baterija 4,8V 2,0Ah za svjet. sa vl. nap. LED sa LPU modulom LPU or LEM module	NLAKKU4820