

KB sigur.svj HIGH POWER +ERT-LED 230VAC CPS MIX univerzalna

In emergency mode switching from LED to ERT-LED for rescue path illumination in 4 directions, modular version with optionally available pictogram panels with viewing distance 14m, 22m, 30m, 520lm





Tehnički podaci

Neto duljina (mm)	326,00
Neto širina (mm)	50,00
Neto visina (mm)	50,00
Neto masa (kg)	1,00
Vrsta svjetiljke	modular safety luminaire
VB/CPS	Za centralni panik sustav (CPS)
Funkcija	S nadzorom i kombiniranim pogonom
Izvedba/tip	Plastične svjetiljke
Dizajn	KB
Bez halogena	Plastično kućište, bez halogena
Boja	RAL 9003 (bijela)
Izvor svjetla	ERT-LED (4W) LED (3W)
Lumen	520
Naponsko područje (V)	230V AC 50Hz ±20%; 230V DC ±20%
Power maintained mode (W)	5,90
Power non-maintained mode (W)	1,10
Power max. (W)	5,90
IP stupanj zaštite	IP65
Otpornost na udarce	IK05



Tehnički podaci - nastavak

Način montaže	Stropna
	Stropna ugradna opcija
	Univerzalna
	Stropna nadgradna
Min. temperatura okoline (°C)	-5
Maks. temperatura okoline (°C)	40
AA Klasa E 8101	AA4
Proizvođač	Schrack

Dimensions (mm)

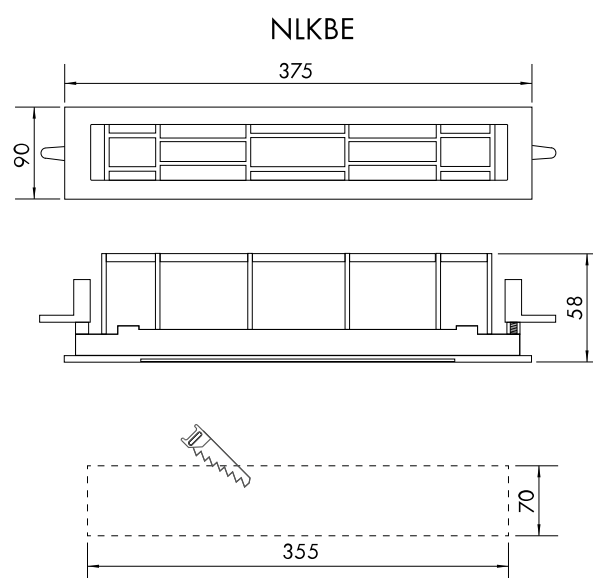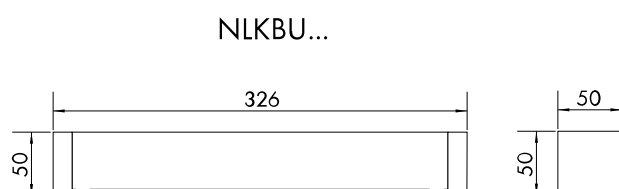

Drilling distances (mm)

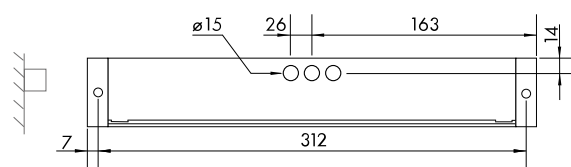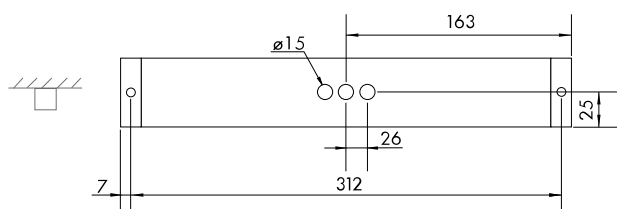

Dimensions (mm) optional pictogram edges

NLKBG



NLKBM



NLKBK



Spacing table - Min. illuminance on the center line +/- 0.5 m: 1 lx - Maintenance factor 0.80

					
2,00	5,85	13,52	14,26	15,07	6,32
2,50	6,57	15,81	16,44	17,16	6,88
3,00	6,51	17,76	18,25	18,99	7,06
3,50	6,65	19,03	19,51	20,06	7,16
4,00	6,40	19,64	20,16	20,66	7,07
5,00	5,98	19,48	20,30	20,96	6,31
6,00	5,50	18,66	19,44	20,31	5,32
7,00	4,51	17,77	18,06	18,55	4,52
8,00	3,55	16,36	16,19	16,06	3,18
9,00	2,67	15,24	14,86	14,47	1,70

Tablica artikla

OPIS	KAT. BROJ
KB sigur.svj HIGH POWER +ERT-LED 230VAC CPS MIX univerzalna	
In emergency mode switching from LED to ERT-LED for rescue path illumination in 4 directions, modular version with optionally available pictogram panels with viewing distance 14m, 22m, 30m, 520lm	NLKBUDUOML
Dodatni pribor	
Piktogramska plexi ploča za lampu KB, komplet. 4 piktograma	NLKBM

Tablica artikla

OPIS	KAT. BROJ
Dodatni pribor	
Piktogramska plexi ploča za lampu KB, komplet. 4 piktograma	NLKBG
Piktogramska plexi ploča za lampu KB, komplet. 4 piktograma	NLKBK
Zaštita od kiše za svjetiljku Design KB od plexiglasa	NLKBRD
Okvir za ugradnju u strop za lampu tip KB Required ceiling cut out: 355 x 70 mm	NLKBE
Kućiste za ugradnju u beton za lampu tip KB	NLKBBE
Paralelni stropni nosač za panik lampu KB	NLAWW008
Par cijevnih nosača 500mm, bijeli, montaža strop	NL2DS
Par cijevnih nosača bijeli, montaža strop	NL2DW
Par cijevnih nosača 500mm, bijeli, montaža strop	NL2PW
Zidni metalni nosač panik lampi za KB,KX,KW,KCD,KE,GX,RX	NLAWX001
Cijevni nosač kromirani, montaža strop	NLDSA000
Ovjesna sjajla dužine 2000mm , komplet 1 par	NLCORD2
Ovjesna sjajla dužine 4000mm , komplet 1 par	NLCORD4