

Tehnički list za artikl: NLKMUS003W

KM LED 3h univerzalna WL Panik svjetiljka, crna

Universal mounting, with LiFePO4 battery, switchable, with 4x0,5W High Power LED, viewing distance: 24m, 170lm



Tehnički podaci


Neto duljina (mm)	250,00
Neto širina (mm)	34,00
Neto visina (mm)	174,00
Neto masa (kg)	0,45
Vrsta svjetiljke	Panik svjetiljka
VB/CPS	Sa vlastitom baterijom
Funkcija	WirelessControl Professional
Izvedba/tip	Plastične svjetiljke
Dizajn	KM
Bez halogena	Plastično kućište, bez halogena
Boja	RAL 9005 (crna)
Piktogram	Slide-in pictogram set (arrow left, right, bottom, top and white foil for single side use) included in accordance with ISO 7010

Tehnički podaci - nastavak


Područje detekcije (m)	24
Vrijeme autonomije (h)	3
Izvor svjetla	LED (2W)
Lumen	170
Naponsko područje (V)	230V AC 50Hz ±20%
Power maintained mode (W)	3,90
Power non-maintained mode (W)	1,50
Power max. (W)	5,30
Baterija (V/Ah)	3,2/3,0 LiFePO4
IP stupanj zaštite	IP54
Otpornost na udarce	IK03
Način montaže	Stropna Stropna ugradna opcija Univerzalna Stropna nadgradna
Min. temperatura okoline (°C)	-5
Maks. temperatura okoline (°C)	40
AA Klasa E 8101	AA4
Proizvođač	Schrack

Dimensions (mm)


NLKM...

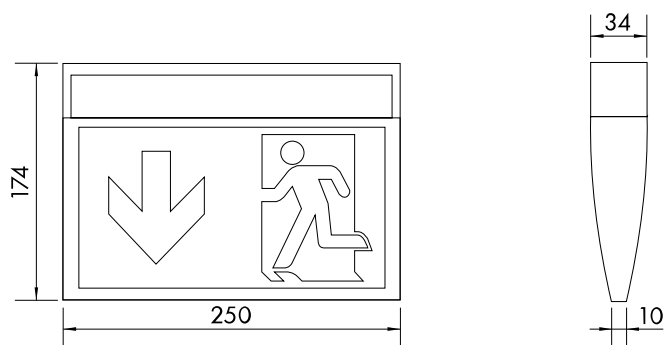

NLKME

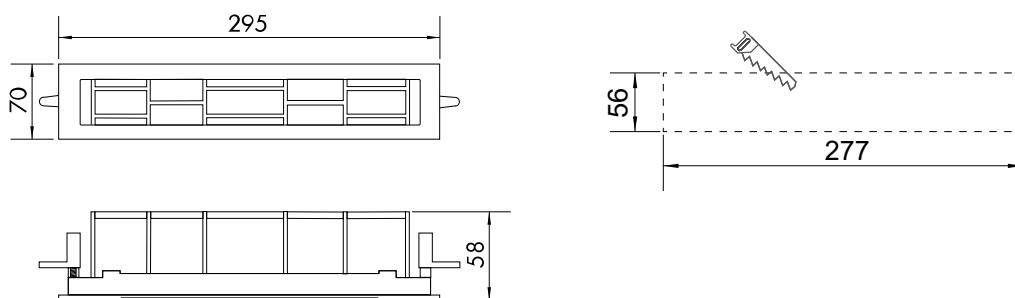

Drilling distances (mm)

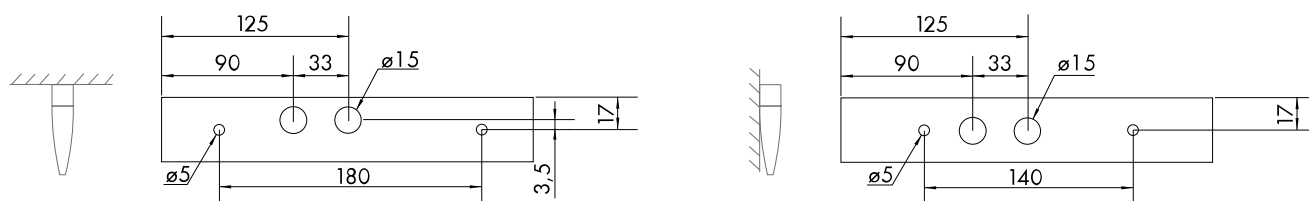

Tablica artikla

OPIS	KAT. BROJ
KM LED 3h univerzalna WL Panik svjetiljka, crna	NLKMUS003W
Universal mounting, with LiFePO4 battery, switchable, with 4x0,5W High Power LED, viewing distance: 24m, 170lm	
Dodatni pribor	
Zidni nosač za svjetiljke KM/KS	NLAWKSU
Bat.3,2V 3Ah za LED svjet. sa vl. napajanjem ,KSC,KMB i ZAW	NLAKKU3230
LiFePO4 baterija, UN3480 - Li-Ion baterije, kompatibilne s aku 3,2V 3,3Ah	
Cjevasti nosač par dužine 500mm bijeli , ožičeni	NL2DWKMKS
Suitable for design KS, KM, KMB in self contained version with LiFePO4 battery	
Zaštitna mrežica za panike KD,KS,LI,M	NLBALL1
l x h x d: 320 x 220 x 120mm	
Cijevni nosač kromirani, montaža strop	NLDSA000
Ovjesna sijla dužine 2000mm , komplet 1 par	NLCORD2
Ovjesna sijla dužine 4000mm , komplet 1 par	NLCORD4