

Tehnički list za artikl: NLKSC008WB

Emerg.lum.KSC 4x0,5W HighPowerLED 8h 230V AC WirelessConnect

White, Universal mounting, with LiFePO4 rechargeable battery, exit sign safety luminaire combination, with Bluetooth communication., 85lm



Tehnički podaci

Neto duljina (mm)	250,00
Neto širina (mm)	34,00
Neto visina (mm)	174,00
Neto masa (kg)	0,60
Vrsta svjetiljke	Kombinirana svjetiljka sa piktogramom i osvjetljenjem evakuacijskog puta Sigurnosna svjetiljka Panik svjetiljka
VB/CPS	Sa vlastitom baterijom
Funkcija	WirelessConnect
Izvedba/tip	Plastične svjetiljke
Dizajn	KS
Bez halogena	Plastično kućište, bez halogena

Tehnički podaci - nastavak


Boja	RAL 9003 (bijela)
Pictogram	Slide-in pictogram set (arrow left, right, bottom, top and white foil for single side use) included in accordance with ISO 7010
Područje detekcije (m)	22
Vrijeme autonomije (h)	8
Izvor svjetla	LED (2W)
Lumen	85
Naponsko područje (V)	230V AC 50Hz $\pm 20\%$
Power maintained mode (W)	3,30
Power non-maintained mode (W)	1
Power max. (W)	4,60
Baterija (V/Ah)	3,2/3,0 LiFePO4
IP stupanj zaštite	IP54
Otpornost na udarce	$\geq IK03$
Način montaže	Stropna Stropna ugradna opcija Univerzalna Stropna nadgradna
Min. temperatura okoline (°C)	-5
Maks. temperatura okoline (°C)	40
AA Klasa E 8101	AA4
Proizvođač	Schrack

Abmessungen (mm)

NLKS...



NLKME

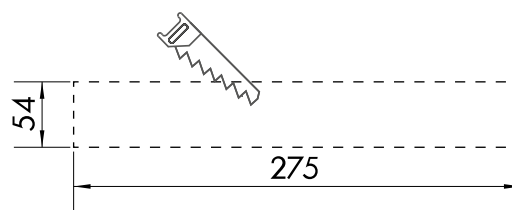

Bohrabstände (mm)



Abstandstabelle - Min. Beleuchtungsstärke auf der Mittellinie +/- 0,5m: 1lx - Wartungsfaktor 0,80, 8h Autonomiezeit

					
2,00	0,77	4,32	4,12	5,19	1,97
2,50	0,78	2,26	3,92	5,63	1,79
3,00	0,73	2,15	3,59	5,32	1,37
3,50	0,57	2,21	3,16	5,06	0,51

Tablica artikla

OPIS	KAT. BROJ
Emerg.lum.KSC 4x0,5W HighPowerLED 8h 230V AC WirelessConnect White, Universal mounting, with LiFePO4 rechargeable battery, exit sign safety luminaire combination, with Bluetooth communication., 85lm	NLKSC008WB
Dodatni pribor	
Bat.3,2V 3Ah za LED svjet. sa vl. napajanjem ,KSC,KMB i ZAW LiFePO4 baterija, UN3480 - Li-Ion baterije, kompatibilne s aku 3,2V 3,3Ah	NLAKKU3230
Ugradni-piktogram lijevo-gore za design AM, KMB, KS, VM viewing distance: 22m	NLAMPIKTLO
Ugradni-piktogram lijevo-dolje za design AM, KMB, KS, VM viewing distance: 22m	NLAMPIKTLU
Ugradni-piktogram desno-gore za design AM, KMB, KS, VM viewing distance: 22m	NLAMPIKTRO
Ugradni-piktogram desno-dolje za design AM, KMB, KS, VM viewing distance: 22m	NLAMPIKTRU
Set piktograma "POŽAR" 2x4kom 22m sukladno ISO7010 pictographs according to ISO 7010 included: fire extinguisher, fire hose reel, fire alarm call point, collection of firefighting equipment, suitable for design KS, AM, KB	NLKS4FIRE
Set piktograma "PRVA POMOĆ" 2x4kom 22m sukladno ISO7010 pictographs according to ISO 7010 included: first aid, Hazard duty point, Automated heart defibrillator, emergency window with escape ladder, suitable for design KS, AM, KB	NLKS4HELP
Zidni nosač za svjetiljke KM/KS	NLAWKSU
Cjevasti nosač par dužine 500mm bijeli , ožičeni Suitable for design KS, KM, KMB in self contained version with LiFePO4 battery	NL2DWKMKS
Zaštitna mrežica za panike KD,KS,LI,M	NLBALL1
Cijevni nosač kromirani, montaža strop	NLDSA000
Ovjesna sjajla dužine 2000mm , komplet 1 par	NLCORD2
Ovjesna sjajla dužine 4000mm , komplet 1 par	NLCORD4