

Tehnički list za artikl: NLKSCS403S

Emergency luminaire KS Autotest LED 3h 230V AC, black

Universal mounting, with 4x0,5W High Power LED, with LiFePO₄ battery, 1h/3h/8h adjustable, with transparent cover for additional light of the rescue path, viewing distance: 22m, 1h: 190lm; 3h: 190lm; 8h: 85lm



Tehnički podaci

Neto duljina (mm)	250,00
Neto širina (mm)	34,00
Neto visina (mm)	174,00
Neto masa (kg)	0,60
Vrsta svjetiljke	Kombinirana svjetiljka sa piktogramom i osvjetljenjem evakuacijskog puta Sigurnosna svjetiljka Panik svjetiljka
VB/CPS	Sa vlastitom baterijom
Funkcija	Samokontrola
Izvedba/tip	Plastične svjetiljke Plosnate svjetiljke

Tehnički podaci - nastavak


Dizajn	KS
Bez halogena	Plastično kućište, bez halogena
Boja	RAL 9005 (crna)
Piktogram	Slide-in pictogram set (arrow left, right, bottom, top and white foil for single side use) included in accordance with ISO 7010
Područje detekcije (m)	22
Vrijeme autonomije (h)	3
Izvor svjetla	LED (2W)
Lumen	1h: 190;3h: 190;8h: 85
Naponsko područje (V)	230V AC 50Hz ±20%
Power maintained mode (W)	3,30
Power non-maintained mode (W)	1
Power max. (W)	4,60
Baterija (V/Ah)	3,2/3,0 LiFePO4
IP stupanj zaštite	IP54
Otpornost na udarce	≥ IK03
Način montaže	Stropna Stropna ugradna opcija Univerzalna Stropna nadgradna
Min. temperatura okoline (°C)	-5
Maks. temperatura okoline (°C)	40
AA Klasa E 8101	AA4
Proizvođač	Schrack

Abmessungen (mm)


NLKS...



NLKME

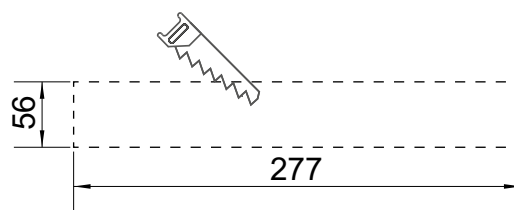

Bohrabstände (mm)

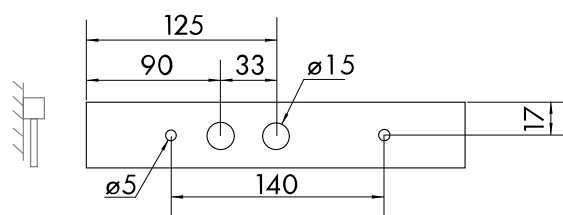

Abstandstabelle - Min. Beleuchtungsstärke auf der Mittellinie +/- 0,5m: 1lx - Wartungsfaktor 0,80, 1h/3h Autonomiezeit

					
2,00	3,01	7,45	7,31	6,8	2,73
2,50	1,71	8,22	7,95	7,38	3,09
3,00	1,24	7,01	6,74	8,07	3,15
3,50	1,21	6,33	6,34	8,72	2,89
4,00	1,24	3,56	6,18	8,9	2,82
5,00	1,08	3,45	5,58	8,17	2,02

Abstandstabelle - Min. Beleuchtungsstärke auf der Mittellinie +/- 0,5m: 1lx - Wartungsfaktor 0,80, 8h Autonomiezeit

					
2,00	0,77	4,32	4,12	5,19	1,97
2,50	0,78	2,26	3,92	5,63	1,79
3,00	0,73	2,15	3,59	5,32	1,37
3,50	0,57	2,21	3,16	5,06	0,51

Tablica artikla

OPIS	KAT. BROJ
Emergency luminaire KS Autotest LED 3h 230V AC, black	
Universal mounting, with 4x0,5W High Power LED, with LiFePO4 battery, 1h/3h/8h adjustable, with transparent cover for additional light of the rescue path, viewing distance: 22m, 1h: 190lm; 3h: 190lm; 8h: 85lm	NLKSCS403S
Dodatni pribor	
Accu LiFePO4 3,2V 3,3Ah for LED luminaire	
For design KM, KSC, KMB, ASM, ZAW, NLIL.L.23., LiFePO4 - Lithium-iron phoshpate battery, UN3480 - UN 3480 : Lithium-Ion batteries, compatible to accu 3,2V 3,3Ah	NLAKKU3233
Ugradni-piktogram lijevo-gore za design AM, KMB, KS, VM viewing distance: 22m	NLAMPIKTLO
Ugradni-piktogram lijevo-dolje za design AM, KMB, KS, VM viewing distance: 22m	NLAMPIKTLU
Ugradni-piktogram desno-gore za design AM, KMB, KS, VM viewing distance: 22m	NLAMPIKTRO
Ugradni-piktogram desno-dolje za design AM, KMB, KS, VM viewing distance: 22m	NLAMPIKTRO
Set piktograma "POŽAR" 2x4kom 22m sukladno ISO7010	
pictographs according to ISO 7010 included: fire extinguisher, fire hose reel, fire alarm call point, collection of firefighting equipment, suitable for design KS, AM, KB	NLKS4FIRE

Tablica artikla

OPIS	KAT. BROJ
Dodatni pribor	
Set piktograma "PRVA POMOĆ" 2x4kom 22m sukladno ISO7010 pictographs according to ISO 7010 included: first aid, Hazard duty point, Automated heart defibrillator, emergency window with escape ladder, suitable for design KS, AM, KB	NLKS4HELP
Zidni nosač za svjetiljke KM/KS	NLAWKSU
Cjevasti nosač par dužine 500mm bijeli, ožičeni Suitable for design KS, KM, KMB in self contained version with LiFePO4 battery	NL2DWKMKS
Zaštitna mrežica za panike KD,KS,LI,M l x h x d: 320 x 220 x 120mm	NLBALL1
Cijevni nosač kromirani, montaža strop	NLDSA000
Ovjesna sjajla dužine 2000mm, komplet 1 par	NLCORD2
Ovjesna sjajla dužine 4000mm, komplet 1 par	NLCORD4