

Tehnički list za artikl: NLKSCS509C

Emergency lum.KS 4x0,5W LED CC24 24V, universal mount., black

with supervision - centrally switchable, with 4x0,5W High Power LED, with transparent cover for additional light of the rescue path, viewing distance: 22m, 220lm



Tehnički podaci



Neto duljina (mm)	250,00
Neto širina (mm)	34,00
Neto visina (mm)	174,00
Neto masa (kg)	0,62
Vrsta svjetiljke	Kombinirana svjetiljka sa piktogramom i osvjetljenjem evakuacijskog puta Sigurnosna svjetiljka Panik svjetiljka
VB/CPS	Za centralni panik sustav (CPS)
Funkcija	24V Core24 with supervision- centrally switchable
Izvedba/tip	Plastične svjetiljke Plosnate svjetiljke
Dizajn	KS

Tehnički podaci - nastavak




Bez halogena	Plastično kućište, bez halogena
Boja	RAL 9005 (crna)
Područje detekcije (m)	22
Izvor svjetla	LED (2W)
Lumen	220
Naponsko područje (V)	24V AC
Power maintained mode (W)	2, 10
Power non-maintained mode (W)	0, 40
Power max. (W)	2, 10
IP stupanj zaštite	IP54
Otpornost na udarce	≥ IK03
Način montaže	Stropna Stropna ugradna opcija Univerzalna Stropna nadgradna
Min. temperatura okoline (°C)	-5
Maks. temperatura okoline (°C)	40
AA Klasa E 8101	AA4
Proizvođač	Schrack

Abmessungen (mm)



NLKS...

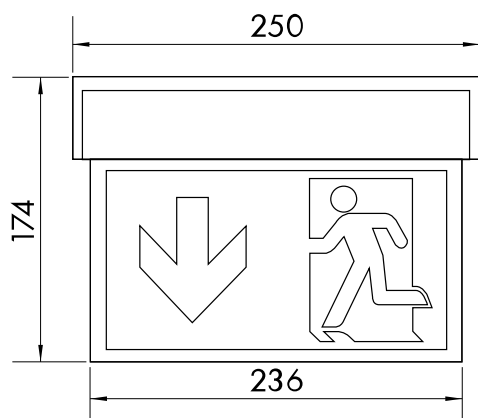

NLKME

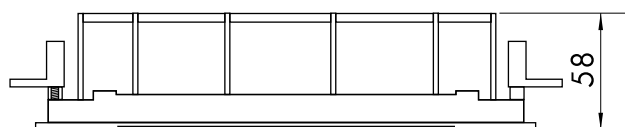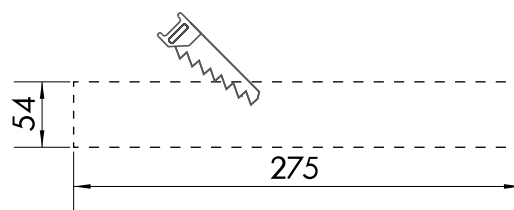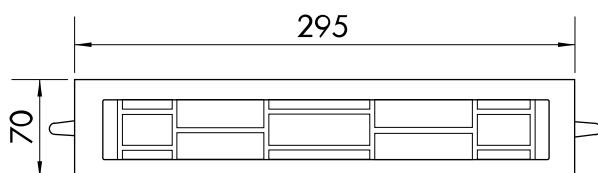

Bohrabstände (mm)

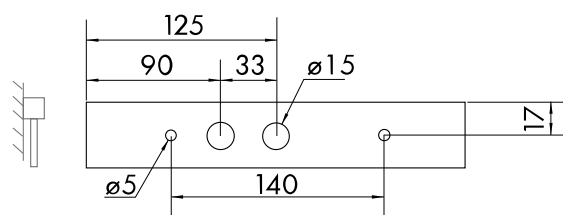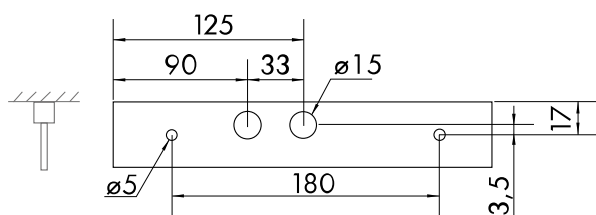

Abstandstabelle - Min. Beleuchtungsstärke auf der Mittellinie +/- 0,5m: 1lx - Wartungsfaktor 0,80

					
2,00	3,07	7,54	7,42	6,91	2,76
2,50	2,95	8,36	8,09	7,52	3,13
3,00	1,28	7,33	7,06	8,16	3,24
3,50	1,24	6,66	6,47	8,85	3
4,00	1,27	3,67	6,42	9,15	2,91
5,00	1,15	3,52	5,79	8,41	2,15

Tablica artikla

OPIS	KAT. BROJ
Emergency lum.KS 4x0,5W LED CC24 24V,universal mount., black with supervision - centrally switchable, with 4x0,5W High Power LED, with transparent cover for additional light of the rescue path, viewing distance: 22m, 220lm	NLKSCS509C
Dodatni pribor	
Ugradni okvir za KM i KS, crni, samo za svjetiljke bez bat. Required ceiling cut out: 275 x 54 mm	NLKMES
Ugradni-piktogram lijevo-gore za design AM, KMB, KS, VM viewing distance: 22m	NLAMPIKTLO
Ugradni-piktogram lijevo-dolje za design AM, KMB, KS, VM viewing distance: 22m	NLAMPIKTLU
Ugradni-piktogram desno-gore za design AM, KMB, KS, VM viewing distance: 22m	NLAMPIKTRO
Ugradni-piktogram desno-dolje za design AM, KMB, KS, VM viewing distance: 22m	NLAMPIKTRU
Set piktograma "POŽAR" 2x4kom 22m sukladno ISO7010 pictographs according to ISO 7010 included: fire extinguisher, fire hose reel, fire alarm call point, collection of firefighting equipment, suitable for design KS, AM, KB	NLKS4FIRE
Set piktograma "PRVA POMOĆ" 2x4kom 22m sukladno ISO7010 pictographs according to ISO 7010 included: first aid, Hazard duty point, Automated heart defibrillator, emergency window with escape ladder, suitable for design KS, AM, KB	NLKS4HELP
Zidni nosač za svjetiljke KM/KS	NLAWKSU
Cjevasti nosač par dužine 500mm bijeli , ožičeni Suitable for design KS, KM, KMB in self contained version with LiFePO4 battery	NL2DWKMKS
Zaštitna mrežica za panike KD,KS,LI,M	NLBALL1
Cijevni nosač kromirani, montaža strop	NLDSA000
Ovjesna sjajla dužine 2000mm , komplet 1 par	NLCORD2
Ovjesna sjajla dužine 4000mm , komplet 1 par	NLCORD4