


Panik lam. KW LED 230VAC, montaža strop


suitable for ceiling mounting with pictograms on one or two sides as well as for wall mounting with pictogram on one side, viewing distance: 16m

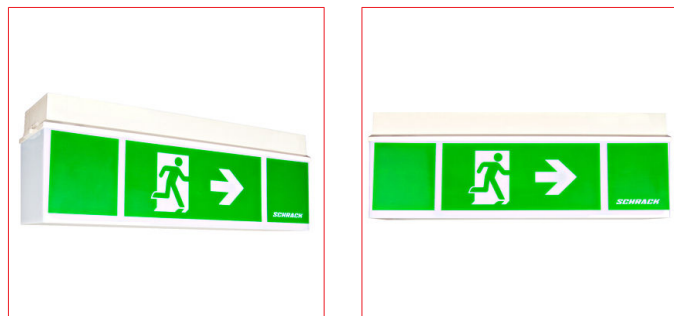

Tehnički podaci

Neto duljina (mm)	360,00
Neto širina (mm)	92,00
Neto visina (mm)	125,00
Neto masa (kg)	0,70
Vrsta svjetiljke	Panik svjetiljka
VB/CPS	Za centralni panik sustav (CPS)
Funkcija	Standard
Izvedba/tip	Plastične svjetiljke
Dizajn	KW
Bez halogena	Plastično kućište, bez halogena
Boja	bijela
Područje detekcije (m)	16
Izvor svjetla	HP-LED (3W)
Lumen	300
Napon (V)	230V AC 50Hz ±20%; 230V DC ±20%
IP stupanj zaštite	IP54
Način montaže	Stropna nadgradna
AA Class E 8101	AA4
Proizvođač	Schrack

Dimensions (mm)



Distance table - min. illumination at the middle line: 1lx - maintenance factor 0,80

Montagehöhe [m]					
2,00	2,65	7,29	6,52	5,68	2,07
2,50	2,68	7,58	6,78	5,94	2,02
3,00	2,52	7,69	6,87	6,03	1,87
3,50	2,19	7,63	6,79	5,94	1,56
4,00	1,54	7,39	6,53	5,68	0,92

Tablica artikla

OPIS	KAT. BROJ
Panik lam. KW LED 230VAC, montaža strop	
suitable for ceiling mounting with pictograms on one or two sides as well as for wall mounting with pictogram on one side, viewing distance: 16m	NLKWD009
Dodatni pribor	
Prozirno kućište za KW zidna montaža	NLKWC
Zaštitna mrežica za panike KW	NLBKW
Komplet piktograma za KW lijevo,desno, dolje	NLKW0103
Visoki poklopac za zidnu montažu za KW svjetiljku,opal	NLKWH
Par cijevnih nosača 500mm, bijeli, montaža strop	NL2PW
Zidni metalni nosač panik lampi za KB,KX,KW,KCD,KE,GX,RX	NLWX001