

Tehnički list za artikl: NLKWD009EL

Svjetlika KWD 6x0,5W LED 230V , CPS, montaža strop

with supervision - centrally switchable, suitable for ceiling mounting with pictograms on one or two sides as well as for wall mounting with pictogram on one side, viewing distance: 16m



Tehnički podaci

Neto duljina (mm)	360,00
Neto širina (mm)	92,00
Neto visina (mm)	125,00
Neto masa (kg)	0,70
Vrsta svjetiljke	Panik svjetiljka
VB/CPS	Za centralni panik sustav (CPS)
Funkcija	S nadzorom - centralno ON/OFF
Izvedba/tip	Plastične svjetiljke
Dizajn	KW
Bez halogena	Plastično kućište, bez halogena
Boja	bijela
Pictogram	Adhesive pictogram set (arrow left, right, bottom, top) included in accordance with ISO 7010
Područje detekcije (m)	16
Izvor svjetla	LED (3W)
Lumen	300
Napon (V)	230V AC 50Hz ±20%; 230V DC ±20%
IP stupanj zaštite	IP54
Način montaže	Stropna nadgradna
Min. temperatura okoline (°C)	-20
Maks. temperatura okoline (°C)	40

Tehnički podaci - nastavak

AA Klasa E 8101


AA4

Proizvođač

Schrack

Dimensions (mm)

NLKW...D...

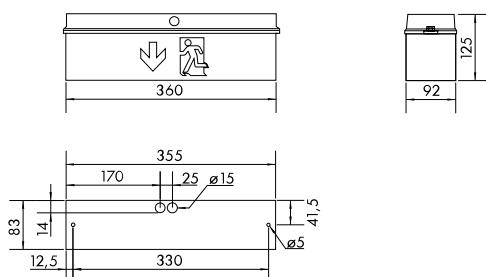

Distance table - min. illumination at the middle line: 1 lx - maintenance factor 0,80

Montagehöhe [m]					
2,00	2,65	7,29	6,52	5,68	2,07
2,50	2,68	7,58	6,78	5,94	2,02
3,00	2,52	7,69	6,87	6,03	1,87
3,50	2,19	7,63	6,79	5,94	1,56
4,00	1,54	7,39	6,53	5,68	0,92

Tablica artikla

OPIS	KAT. BROJ
Svjetiljka KWD 6x0,5W LED 230V , CPS, montaža strop	
with supervision - centrally switchable, suitable for ceiling mounting with pictograms on one or two sides as well as for wall mounting NLKWD009EL	
with pictogram on one side, viewing distance: 16m	
Dodatni pribor	
Prozirno kućište za KW zidna montaža	NLKW
Zaštitna mrežica za panike KW	NLBKW
Set piktograma za NLKW... Lijevo, desno, gore i dolje	NLKWIPKTO
Visoki poklopac za zidnu montažu za KW svjetiljku, opal	NLKW
Par cijevnih nosača 500mm, bijeli, montaža strop	NL2PW
Zidni metalni nosač panik lampi za KB, KX, KW, KCD, KE, GX, RX	NLWX001