


Emerg.lum. KW Autotest 4x1W ERT-LED 3h 230V AC ceiling m.

1h/3h adjustable, ceiling surface mounting with pictograms on one or two sides or for wall surface mounting with pictogram on one side with additional illumination for escape routes, viewing distance: 16m, IP54, protection class II, 1h: 520lm; 3h: 520lm

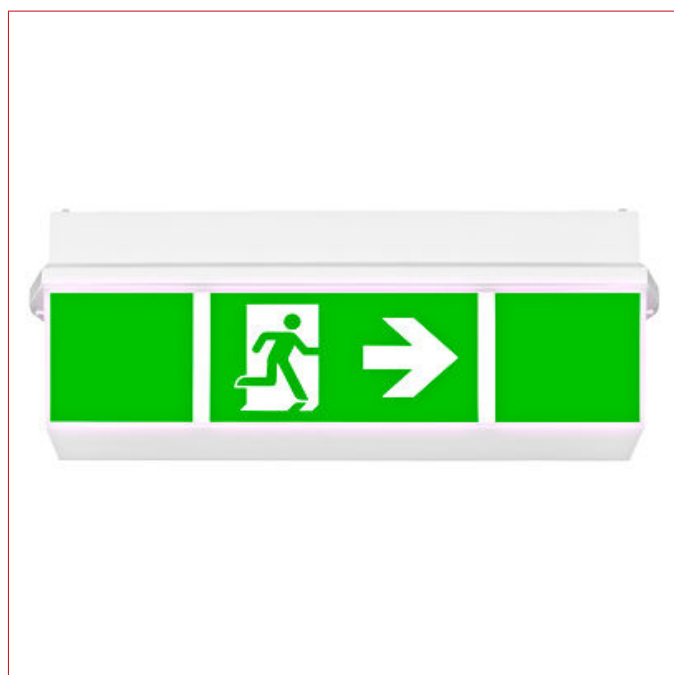


Tehnički podaci

Neto duljina (mm)	390,00
Neto širina (mm)	93,00
Neto visina (mm)	139,00
Neto masa (kg)	0,70
Vrsta svjetiljke	Kombinirana svjetiljka sa piktogramom i osvjetljenjem evakuacijskog puta Sigurnosna svjetiljka Panik svjetiljka
VB/CPS	Sa vlastitom baterijom
Funkcija	Samokontrola
Izvedba/tip	Plastične svjetiljke
Dizajn	KW

Tehnički podaci - nastavak

Bez halogena	Plastično kućište, bez halogena
Boja	bijela
Područje detekcije (m)	16
Vrijeme autonomije (h)	3
Izvor svjetla	ERT-LED (4W)
Lumen	1h: 520;3h: 520
Raspon napona (V)	230V AC 50Hz ±20%
Baterija (V/Ah)	9,6/2,0 NiMh
IP stupanj zaštite	IP65
Način montaže	Stropna nadgradna
Min. temperatura okoline (°C)	-5
Maks. temperatura okoline (°C)	40
AA Klasa E 8101	AA4
Proizvođač	Schrack

Abmessungen (mm)

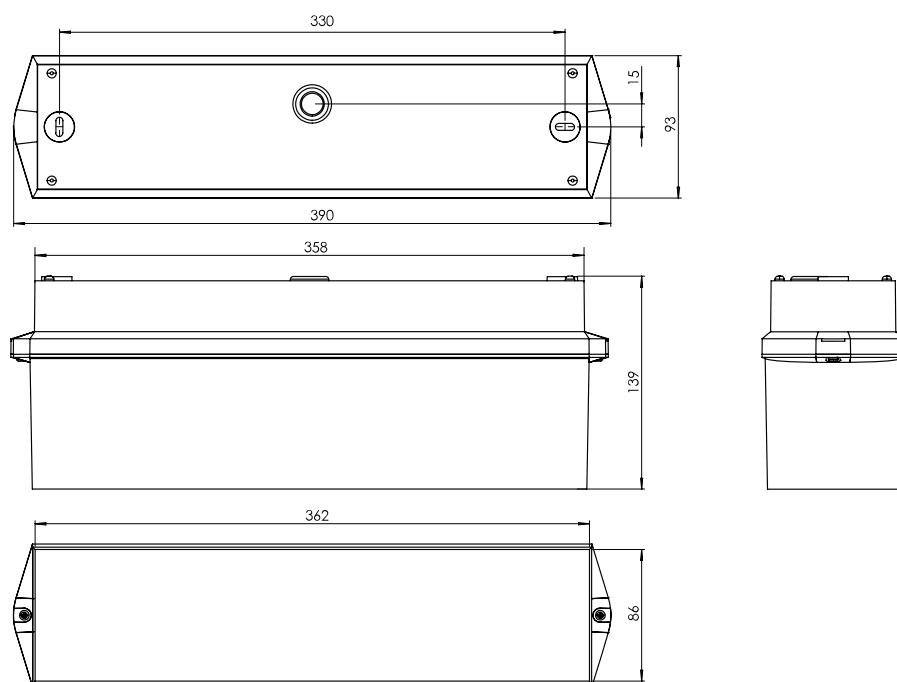

Abstandstabelle 1h, 3h Autonomie - Min. Beleuchtungsstärke: 1lx - Wartungsfaktor 0,80

Montagehöhe [m]					
2,00	3,82	9,88	8,56	7,32	2,88
2,50	3,98	10,50	9,14	7,87	3,01
3,00	4,06	10,95	9,57	8,26	3,06
3,50	4,04	11,26	9,85	8,51	3,02
4,00	3,94	11,44	10,01	8,64	2,90
5,00	3,42	11,42	9,96	8,54	2,34
6,00	1,86	10,92	9,40	7,96	0,56

Abstandstabelle 8h Autonomie - Min. Beleuchtungsstärke: 1lx - Wartungsfaktor 0,80

Montagehöhe [m]					
2,00	2,52	6,89	6,02	5,20	1,89
2,50	2,44	7,10	6,21	5,36	1,79
3,00	2,20	7,11	6,20	5,33	1,53
3,50	1,68	6,93	5,99	5,10	0,97

Tablica artikla

OPIS	KAT. BROJ
Emerg.lum. KW Autotest 4x1W ERT-LED 3h 230V AC ceiling m. 1h/3h adjustable, ceiling surface mounting with pictograms on one or two sides or for wall surface mounting with pictogram on one NLKWD031 SC side with additional illumination for escape routes, viewing distance: 16m, IP54, protection class II, 1h: 520lm; 3h: 520lm	
Dodatni pribor	
Zaštitna mrežica za panike KW	NLBKW
Par cijevnih nosača 500mm, bijeli, montaža strop	NL2PW
Zidni metalni nosač panik lampi za KB, KX, KW, KCD, KE, GX, RX	NLAWX001