


Tehnički list za artikl: NLKWIDC33S

Panik lampa KWI Cool Autotest 4x1W ERT-LED 3h 230VAC stropna

1h/3h/8h adjustable, ceiling surface mounting with pictograms on one or two sides or for wall surface mounting with pictogram on one side with additional illumination for escape routes, temp. range -30° up to 35°C, batteries and electronics in external IP54 housing (176 x 130 x 76mm) to be mounted outside the cold area, viewing distance: 16m, IP65, IK06, protection class II, 1h: 520lm; 3h: 520lm; 8h: 200lm

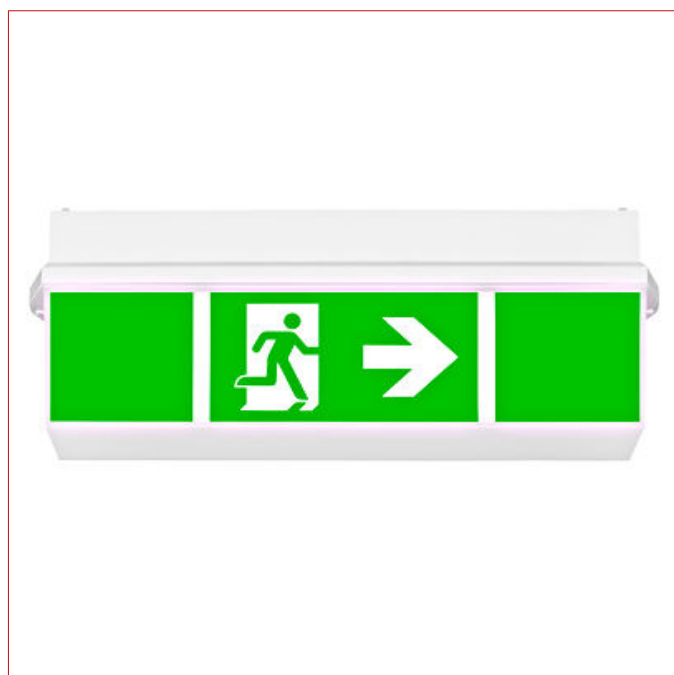

Info o proizvodu

When used with pictograms, it is recommended not to use exchangeable lenses for uniform illumination. When used as an emergency luminaire, the luminaire can be operated without or with exchangeable lenses - see luminaire spacing tables in the online data sheet.




Tehnički podaci

Neto duljina (mm)	390,00
Neto širina (mm)	93,00
Neto visina (mm)	99,00
Neto masa (kg)	1,37


Tehnički podaci - nastavak

Vrsta svjetiljke	Kombinirana svjetiljka sa piktogramom i osvjetljenjem evakuacijskog puta Sigurnosna svjetiljka Panik svjetiljka
VB/CPS	Sa vlastitom baterijom
Funkcija	SelfControl Low Temperature
Izvedba/tip	Plastične svjetiljke
Dizajn	KWI
Bez halogena	Plastično kućište, bez halogena
Boja	bijela
Pictogram	Adhesive pictogram set (arrow left, right, bottom, top) included in accordance with ISO 7010
Područje detekcije (m)	16
Vrijeme autonomije (h)	3
Izvor svjetla	ERT-LED (4W)
Lumen	1h: 520;3h: 520;8h: 200
Naponsko područje (V)	230V AC 50Hz ±20%
Baterija (V/Ah)	9,6/2,0 NiMh
IP stupanj zaštite	IP65
Otpornost na udarce	IK06
Način montaže	Stropna nadgradna
Min. temperatura okoline (°C)	-30
Maks. temperatura okoline (°C)	40
AA Klasa E 8101	AA3 AA4 AA5
Proizvođač	Schrack

Dimensions (mm)

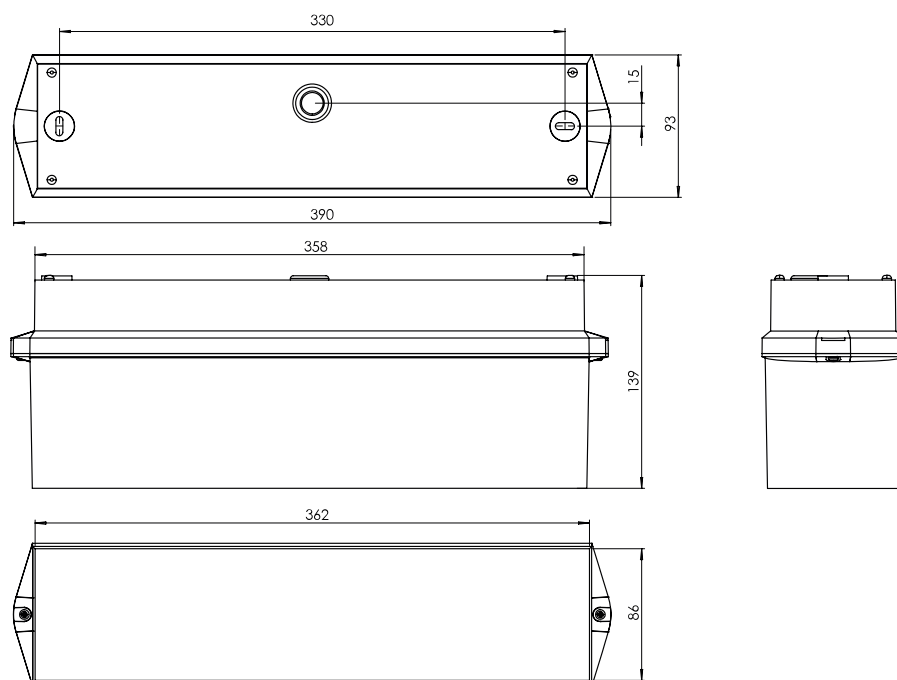

Housing IP54 for COOL version (mm)

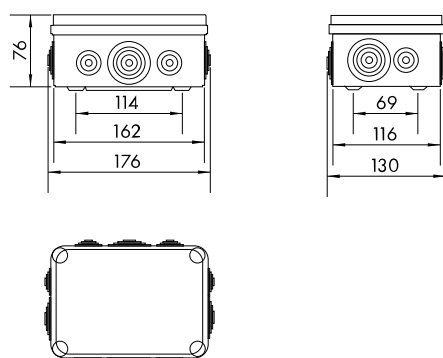

Podatkovna tablica: Panik lampa KWI Cool Autotest 4x1W ERT-LED 3h 230VAC stropna

Montagehöhe [m]					
2,00	3,82	9,88	8,56	7,32	2,88
2,50	3,98	10,50	9,14	7,87	3,01
3,00	4,06	10,95	9,57	8,26	3,06
3,50	4,04	11,26	9,85	8,51	3,02
4,00	3,94	11,44	10,01	8,64	2,90
5,00	3,42	11,42	9,96	8,54	2,34
6,00	1,86	10,92	9,40	7,96	0,56

Podatkovna tablica: Panik lampa KWI Cool Autotest 4x1W ERT-LED 3h 230VAC stropna

Montagehöhe [m]					
2,00	2,52	6,89	6,02	5,20	1,89
2,50	2,44	7,10	6,21	5,36	1,79
3,00	2,20	7,11	6,20	5,33	1,53
3,50	1,68	6,93	5,99	5,10	0,97

Tablica artikla

OPIS	KAT. BROJ
Panik lampa KWI Cool Autotest 4x1W ERT-LED 3h 230VAC stropna 1h/3h/8h adjustable, ceiling surface mounting with pictograms on one or two sides or for wall surface mounting with pictogram on one side with additional illumination for escape routes, temp. range -30° up to 35°C, batteries and electronics in external IP54 housing (176 x 130 x 76mm) to be mounted outside the cold area, viewing distance: 16m, IP65, IK06, protection class II, 1h: 520lm; 3h: 520lm; 8h: 200lm	NLKWIDC33S
Dodatni pribor	
Zaštitna mrežica za panike KW	NLBKW
Set piktograma za NLKWI.. Lijevo, desno, gore i dolje	NLKWIPKTO
Par cijevnih nosača 500mm, bijeli, montaža strop	NL2PW
Zidni metalni nosač panik lampi za KB, KX, KW, KCD, KE, GX, RX	NLAWX001
Baterija 9,6V 2,0Ah za paniku sa ERT-LED autonomije 1h, 3h, 8h Suitable for LPU module	NLAKKU9620