


Tehnički list za artikl: NLKWW001SC

Emergency luminaire KW Autotest LED 3h 230V AC wall mount

1h/3h adjustable, wall surface mounting with pictogram on one side, viewing distance: 16m, IP54, protection class II, 1h: 300lm; 3h: 300lm

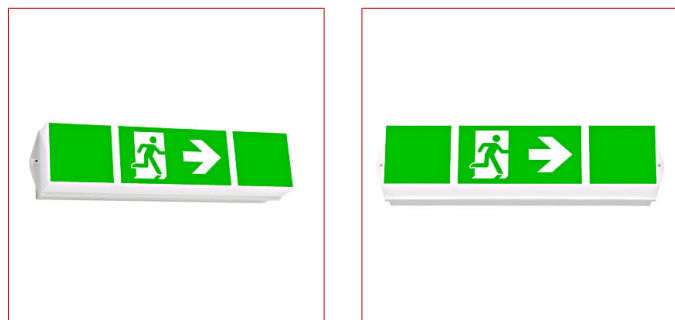


Tehnički podaci

Neto duljina (mm)	390,00
Neto širina (mm)	93,00
Neto visina (mm)	99,00
Neto masa (kg)	1,30
Vrsta svjetiljke	Panik svjetiljka
VB/CPS	Sa vlastitom baterijom
Funkcija	Samokontrola
Izvedba/tip	Plastične svjetiljke
Dizajn	KW
Bez halogena	Plastično kućište, bez halogena
Boja	bijela
Područje detekcije (m)	16
Vrijeme autonomije (h)	3
Izvor svjetla	LED (3W)
Lumen	1h: 300;3h: 300
Raspon napona (V)	230V AC 50Hz ±20%
Baterija (V/Ah)	9,6/2,0 NiMh
IP stupanj zaštite	IP65
Način montaže	Stropna Stropna nadgradna
Min. temperatura okoline (°C)	-5

Tehnički podaci - nastavak

Maks. temperatura okoline (°C)	40
AA Klasa E 8101	AA4
Proizvođač	Schrack

Abmessungen (mm)

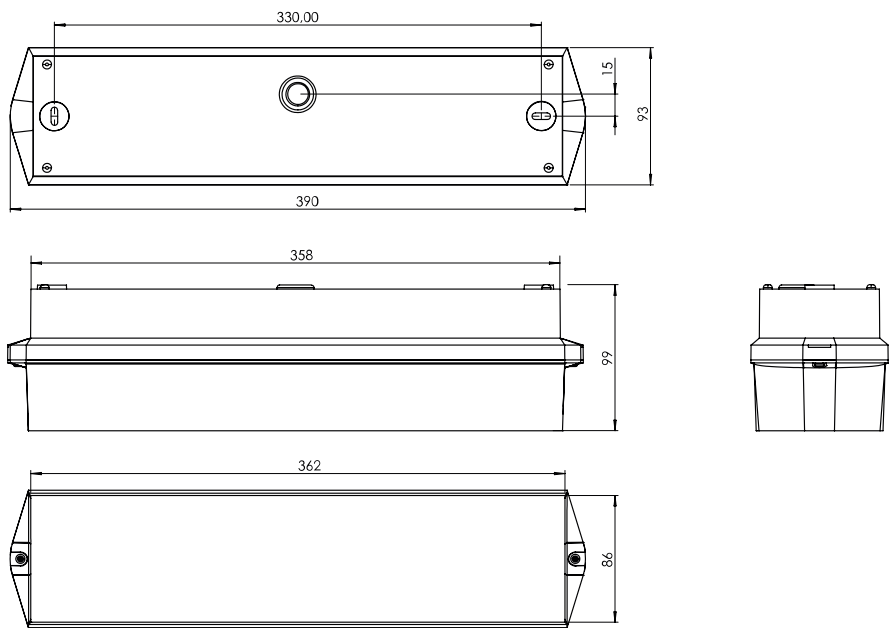

Abstandstabelle 1h, 3h Autonomie - Min. Beleuchtungsstärke: 1lx - Wartungsfaktor 0,80

Montagehöhe [m]					
2,00	3,31	8,48	7,84	7,17	2,84
2,50	3,46	9,07	8,42	7,75	2,99
3,00	3,52	9,49	8,84	8,17	3,06
3,50	3,51	9,78	9,12	8,46	3,05
4,00	3,41	9,94	9,28	8,62	2,95
5,00	2,90	9,90	9,26	8,60	2,46
6,00	1,60	9,40	8,76	8,14	1,24

Abstandstabelle 8h Autonomie - Min. Beleuchtungsstärke: 1lx - Wartungsfaktor 0,80

Montagehöhe [m]					
2,00	2,12	5,84	5,45	5,04	1,84
2,50	2,02	6,01	5,61	5,22	1,75
3,00	1,76	5,98	5,58	5,20	1,50
3,50	1,20	5,67	5,36	4,99	0,97

Tablica artikla

OPIS	KAT. BROJ
Emergency luminaire KW Autotest LED 3h 230V AC wall mount 1h/3h adjustable, wall surface mounting with pictogram on one side, viewing distance: 16m, IP54, protection class II, 1h: 300lm; 3h: 300lm	NLKWW001SC
Dodatni pribor	
Zaštitna mrežica za panike KW	NLBKW
Par cijevnih nosača 500mm, bijeli, montaža strop	NL2PW
Zidni metalni nosač panik lampi za KB,KX,KW,KCD,KE,GX,RX	NLAWX001
Baterija 9,6V 2,0Ah za paniku sa ERT-LED autonomije 1h,3h,8h Suitable for LPU module	NLAKKU9620