


Tehnički list za artikl: NLKWW009EL

Svjetljika KWW 6x0,5W LED 230V , CPS, montaža zid

with supervision - centrally switchable, suitable for wall mounting with pictogram on one side,
viewing distance: 16m



Tehnički podaci

Neto duljina (mm)	360,00
Neto širina (mm)	92,00
Neto visina (mm)	85,00
Neto masa (kg)	0,70
Vrsta svjetiljke	Panik svjetiljka
VB/CPS	Za centralni panik sustav (CPS)
Funkcija	S nadzorom - centralno ON/OFF
Izvedba/tip	Plastične svjetiljke
Dizajn	KW
Bez halogena	Plastično kućište, bez halogena
Boja	bijela
Pictogram	Adhesive pictogram set (arrow left, right, bottom, top) included in accordance with ISO 7010
Područje detekcije (m)	16
Izvor svjetla	LED (3W)
Lumen	300
Naponsko područje (V)	230V AC 50Hz ±20%; 230V DC ±20%
IP stupanj zaštite	IP54
Način montaže	Stropna
Min. temperatura okoline (°C)	-20
Maks. temperatura okoline (°C)	40

Tehnički podaci - nastavak


AA Klasa E 8101

AA4

Proizvođač

Schrack

Dimensions (mm)

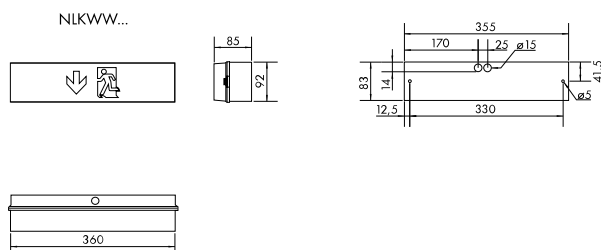

Distance table - min. illumination at the middle line: 1lx - maintenance factor 0,80

Montagehöhe [m]					
2,00	2,75	7,27	6,93	6,57	2,56
2,50	2,88	7,73	7,39	7,04	2,59
3,00	2,80	8,03	7,69	7,35	2,61
3,50	2,73	8,19	7,85	7,51	2,54
4,00	2,50	8,21	7,88	7,55	2,31

Tablica artikla

OPIS	KAT. BROJ
Svjetiljka KWW 6x0,5W LED 230V , CPS, montaža zid with supervision - centrally switchable, suitable for wall mounting with pictogram on one side, viewing distance: 16m	NLKWW009EL
Dodatni pribor	
Prozirno kućište za KW zidna montaža	NLKWC
Zaštitna mrežica za panike KW	NLBKW
Set piktograma za NLKWI.. Lijevo, desno, gore i dolje	NLKWIPIKTO
Niski poklopac za stropnu montažu za KW lampu, opal	NLKWN