

Tehnički list za artikl: NLLIU030ML

Linda Industrija 30W 230VAC/DC ML MIXMOD CPS

mixed mode, single lamp supervision, 230V AC/DC, universal mounting, 4758lm, IP65, 4000K, l=1570, suitable for installation in food-production/processing environments (HACCP, IFS, BRC Standard)., 4760lm




Tehnički podaci

Neto duljina (mm)	1.570,00
Neto širina (mm)	100,00
Neto visina (mm)	110,00
Neto masa (kg)	2,80
Vrsta svjetiljke	Kombinirana svjetiljka sa piktogramom i osvjetljenjem evakuacijskog puta Sigurnosna svjetiljka Panik svjetiljka
VB/CPS	Za centralni panik sustav (CPS)
Funkcija	S nadzorom i kombiniranim pogonom
Izvedba/tip	Plastične svjetiljke
Dizajn	LIU
Boja	RAL 7035 (siva)
Izvor svjetla	LED (30W)
Lumen	4760
Naponsko područje (V)	230V AC 50Hz ±20%; 230V DC ±20%
IP stupanj zaštite	IP65
Otpornost na udarce	IK10

Tehnički podaci - nastavak

Način montaže	Stropna Univerzalna Stropna nadgradna
Min. temperatura okoline (°C)	-20
Maks. temperatura okoline (°C)	35

Dimensions (mm)

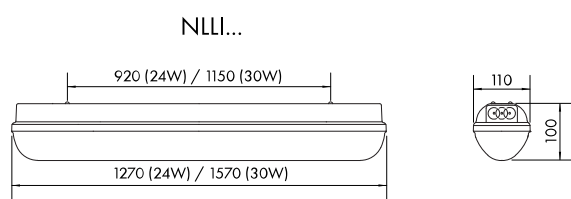

Spacing table - Min. illuminance on the center line +/- 0.5 m: 1 lx - Maintenance factor 0.80

					
2,00	4,83	11,72	11,31	11,3	4,61
2,50	5,99	14,54	13,99	13,91	5,66
3,00	7,17	17,39	16,71	16,54	6,72
3,50	8,34	20,23	19,43	19,21	7,79
4,00	9,5	23,05	22,11	21,83	8,85
5,00	11,86	28,72	27,54	26,24	10,6
6,00	12,79	31,32	29,9	28,18	11,3
7,00	13,79	33,45	31,79	29,86	11,87
8,00	14,68	35,36	33,45	31,27	12,33
9,00	15,41	37,3	34,94	32,53	12,71
10,00	15,74	39,23	36,44	33,63	13,03
12,00	16,54	42,62	39,02	35,43	13,47
14,00	17,69	44,47	40,65	36,78	13,68
16,00	18,29	45,56	41,66	37,73	13,59

Tablica artikla

OPIS	KAT. BROJ
Linda Industrija 30W 230VAC/DC ML MIXMOD CPS mixed mode, single lamp supervision, 230V AC/DC, universal mounting, 4758lm, IP65, 4000K, l=1570, suitable for installation in NLLIU030ML food-production/processing environments (HACCP, IFS, BRC Standard)., 4760lm	
Dodatni pribor	
Set za montažu svjetiljke LINDA zidni +/- 90° za 18/36/58W	LI2JLT0452
Ovjesne kuke od nehrđajućeg čelika za svjet. LINDA 18/36/58W	LI2JLT0463