

Tehnički list za artikl: NLMMDTW09E

Svjet.design MM LED EL 230VAC/DC DUO bijela montaža strop

Centrally switchable, with single lamp supervision, viewing distance: 22m, 230V AC/DC, with additional LED spot for safety illumination in emergency mode, 140lm




Tehnički podaci

Neto duljina (mm)	236,00
Neto širina (mm)	45,00
Neto visina (mm)	136,00
Neto masa (kg)	1,15
Vrsta svjetiljke	Kombinirana svjetiljka sa piktogramom i osvjetljenjem evakuacijskog puta
VB/CPS	Za centralni panik sustav (CPS)
Funkcija	S nadzorom - centralno ON/OFF
Izvedba/tip	Metalna zaštita od udara
Dizajn	MM
Boja	RAL 9003 (bijela)
Piktogram	Set umetnih piktograma sadržan u isporuci (strelice: lijevo, desno, gore, dolje) prema ISO 7010

Tehnički podaci - nastavak

Područje detekcije (m)	22
Izvor svjetla	LED (2W) ERT-LED (1W)
Lumen	140
Naponsko područje (V)	230V AC 50Hz ±20%; 230V DC ±20%
Power maintained mode (W)	3,50
Power non-maintained mode (W)	1,10
Power max. (W)	5,10
IP stupanj zaštite	IP40
Otpornost na udarce	≥ IK03
Način montaže	Stropna nadgradna
Min. temperatura okoline (°C)	-5
Maks. temperatura okoline (°C)	40
AA Klasa E 8101	AA4
Proizvođač	Schrack

Dimensions (mm)

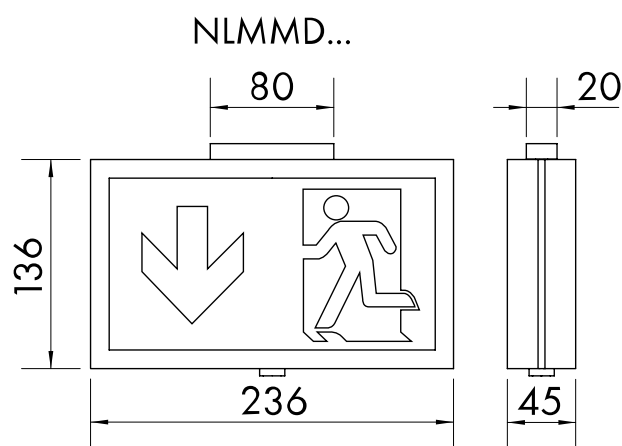

Spacing table - Min. illuminance on the center line +/- 0.5 m: 1 lx - Maintenance factor 0.80

					
2,00	3,86	8,79	6,13	3,19	1,41
2,50	2,85	9,62	6,47	3,7	1,56
3,00	3,12	9,84	5,76	4,11	1,61
3,50	3,32	10,35	6,26	4,41	1,48
4,00	3,46	8,75	6,65	4,55	1,22

OPIS	KAT. BROJ
Svjet.design MM LED EL 230VAC/DC DUO bijela montaža strop	
Centrally switchable, with single lamp supervision, viewing distance: 22m, 230V AC/DC, with additional LED spot for safety illumination in emergency mode, 140lm	NLMMDTW09E