


Tehnički list za artikl: NLOMCS009M

Panik svje.tip OL OLED 230VAC/DC CPS jednostrana, ovjesom


Incl. standard pictogram set, with integrated adjustable ceiling short pendant, convertible to wall bracket mounting, with single luminaire supervision and mixed operation; viewing distance: 20m

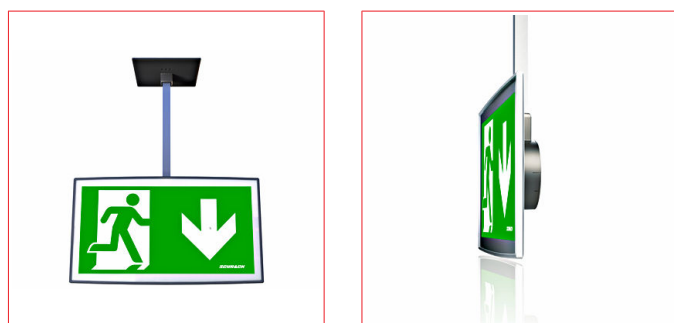

Tehnički podaci

Neto duljina (mm)	222,00
Neto visina (mm)	127,00
Neto dubina (mm)	40,00
Neto masa (kg)	0,20
Vrsta svjetiljke	Panik svjetiljka
VB/CPS	Za centralni panik sustav (CPS)
Funkcija	S nadzorom - centralno ON/OFF
Izvedba/tip	Plosnate svjetiljke
Dizajn	OM
Bez halogena	Plastično kućište, bez halogena
Boja	eloksirani aluminij
Područje detekcije (m)	20
Izvor svjetla	OLED
Napon (V)	230V AC 50Hz ±20%; 230V DC ±20%
IP stupanj zaštite	IP20
Način montaže	recessed mounting with pendant
Min. temperatura okoline (°C)	0
Maks. temperatura okoline (°C)	40
AA Class E 8101	AA5

Dimensions (mm)

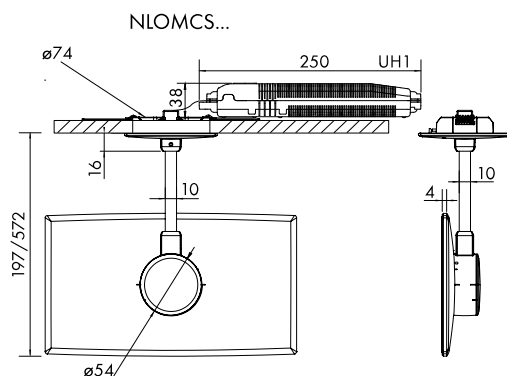

Tablica artikla

OPIS	KAT. BROJ
Panik svje.tip OL OLED 230VAC/DC CPS jednostrana, ovjesom Incl. standard pictogram set, with integrated adjustable ceiling short pendant, convertible to wall bracket mounting, with single luminaire supervision and mixed operation; viewing distance: 20m	NLOMCS009M
Dodatni pribor	
Ovjes Al cijevi 500mm,par can be shortened according to requirements	NLOM1PA