


Tehnički list za artikl: NLOMRS009E

Svjet. OM OLED jednostrana 230VAC/DC , 20m, CPS, mont. u zid

Incl. standard pictogram set, with supervision - centrally switchable; viewing distance: 20m




Tehnički podaci

Neto duljina (mm)	222,00
Neto visina (mm)	127,00
Neto dubina (mm)	10,00
Neto masa (kg)	0,12
Vrsta svjetiljke	Panik svjetiljka
VB/CPS	Za centralni panik sustav (CPS)
Funkcija	S nadzorom - centralno ON/OFF
Izvedba/tip	Plosnate svjetiljke
Dizajn	OM
Bez halogena	Plastično kućište, bez halogena
Boja	RAL 7035 (siva)
Pictogram	Slide-in pictogram set (arrow left, right, bottom, top) included in accordance with ISO 7010
Područje detekcije (m)	20
Izvor svjetla	OLED
Naponsko područje (V)	230V AC 50Hz $\pm 20\%$; 230V DC $\pm 20\%$
Power maintained mode (W)	4
Power non-maintained mode (W)	1, 10
Power max. (W)	4
IP stupanj zaštite	IP20
Otpornost na udarce	$\geq IK03$
Način montaže	Zidna ugradna

Tehnički podaci - nastavak

Min. temperatura okoline (°C)	0
Maks. temperatura okoline (°C)	40
AA Klasa E 8101	AA5
Proizvođač	Schrack

Dimensions (mm)

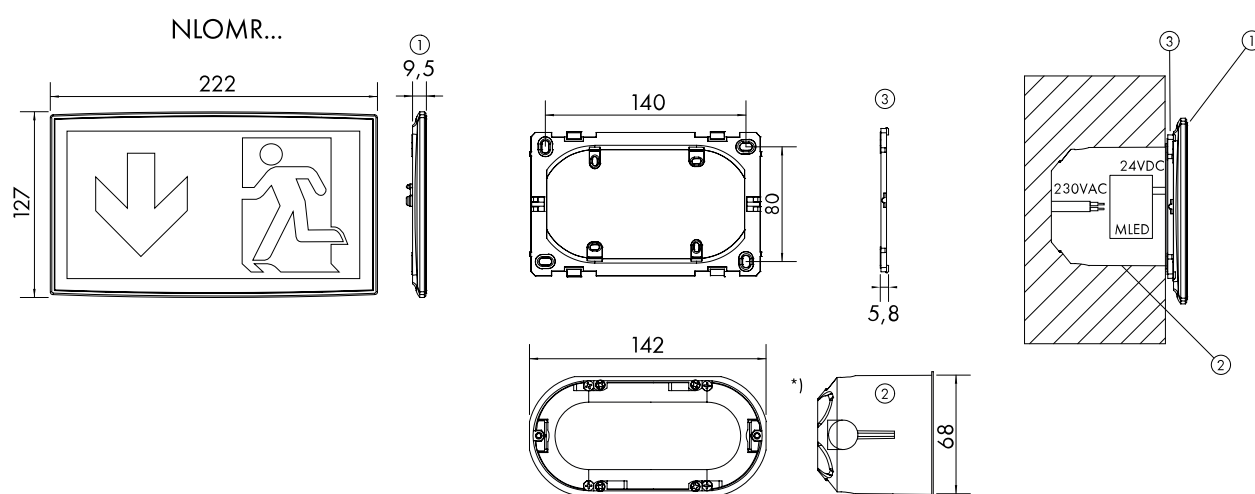

OPIS	KAT. BROJ
Svjet. OM OLED jednostrana 230VAC/DC , 20m,CPS,mont. u zid	NLOMRS009E
Incl. standard pictogram set, with supervision - centrally switchable; viewing distance: 20m	