

Tehnički list za artikl: NLPMDT03SC

PM sigurnosna svj. LED 3h, 230V, SC, stropna mont, TT

1h/3h/8h adjustable, ceiling surface mounting with pictograms on one or two sides, viewing distance: 20m, IP65, protection class II, LiFePO₄ battery suitable for low temperatures -15° to 40°C




Tehnički podaci

Neto duljina (mm)	236,00
Neto širina (mm)	136,00
Neto visina (mm)	168,00
Neto masa (kg)	1,30
Vrsta svjetiljke	Panik svjetiljka
VB/CPS	Sa vlastitom baterijom
Funkcija	SelfControl Low Temperature
Izvedba/tip	Plastične svjetiljke
Dizajn	PM
Bez halogena	Plastično kućište, bez halogena
Boja	RAL 9003 (bijela)

Tehnički podaci - nastavak

Piktogram	Slide-in pictogram set (2x man in the door and two arrows that can each be rotated by 90°) included in accordance with ISO 7010
Područje detekcije (m)	20
Izvor svjetla	LED (3W)
Naponsko područje (V)	230V AC 50Hz ±20%
Power maintained mode (W)	5,70
Power non-maintained mode (W)	2
Power max. (W)	6,90
Baterija (V/Ah)	2x 3,2V/3,3Ah LiFePO4-TT
IP stupanj zaštite	IP65
Otpornost na udarce	≥ IK03
Način montaže	Stropna nadgradna
Min. temperatura okoline (°C)	-15
Maks. temperatura okoline (°C)	40
AA Klasa E 8101	AA4
Proizvođač	Schrack

Dimensions (mm)

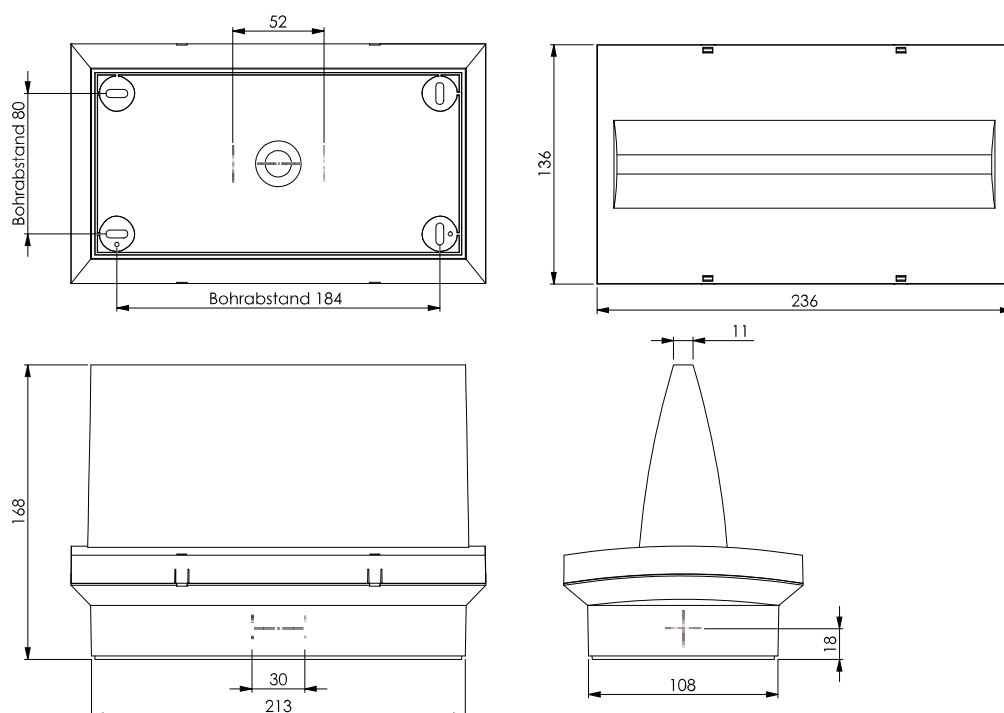

Tablica artikla

OPIS	KAT. BROJ
PM sigurnosna svj. LED 3h, 230V, SC, stropna mont, TT 1h/3h/8h adjustable, ceiling surface mounting with pictograms on one or two sides, viewing distance: 20m, IP65, protection class NLPMDT03SC II, LiFePO4 battery suitable for low temperatures -15° to 40°C	
Dodatni pribor	
Ugradni profil za svjetiljke serije PM Required ceiling cut out: 246 x 152 mm	NLPME
Baterija LiFePO4 3,2V 3,2Ah za svjetiljke KM,KSC,KMB,ASM,ZAW LiFePO4 baterija prikladna za niže temperature, UN3480 - UN 3480 : Lithium-Ion batteries, od -25° do 40°C	NLAKKU323T
	NLTESTSC2
Zaštitni poklopac za testne tipke NLTEST2	NLTEST2COV