

Tehnički list za artikl: NLPMW509CC

# Emergency luminaire PM HP-LED CC24 24V universal mounting

with supervision - centrally switchable, viewing distance: 20m




## Tehnički podaci

|                        |                                                                                                                                 |
|------------------------|---------------------------------------------------------------------------------------------------------------------------------|
| Neto duljina (mm)      | 236,00                                                                                                                          |
| Neto širina (mm)       | 136,00                                                                                                                          |
| Neto visina (mm)       | 65,00                                                                                                                           |
| Neto masa (kg)         | 0,70                                                                                                                            |
| Vrsta svjetiljke       | Panik svjetiljka                                                                                                                |
| VB/CPS                 | Za centralni panik sustav (CPS)                                                                                                 |
| Funkcija               | 24V Core24 with supervision- centrally switchable                                                                               |
| Izvedba/tip            | Plastične svjetiljke                                                                                                            |
| Dizajn                 | PM                                                                                                                              |
| Bez halogena           | Plastično kućište, bez halogena                                                                                                 |
| Boja                   | RAL 9003 (bijela)                                                                                                               |
| Pictogram              | Slide-in pictogram set (2x man in the door and two arrows that can each be rotated by 90°) included in accordance with ISO 7010 |
| Područje detekcije (m) | 20                                                                                                                              |

## Tehnički podaci - nastavak

|                                |                   |
|--------------------------------|-------------------|
| Izvor svjetla                  | LED (3W)          |
| Naponsko područje (V)          | 24V AC            |
| Power maintained mode (W)      | 2,80              |
| Power non-maintained mode (W)  | 0,40              |
| Power max. (W)                 | 2,80              |
| IP stupanj zaštite             | IP65              |
| Otpornost na udarce            | IK06              |
| Način montaže                  | Stropna           |
| Min. temperatura okoline (°C)  | -20               |
| Maks. temperatura okoline (°C) | 40                |
| AA Klasa E 8101                | AA3<br>AA4<br>AA5 |
| Proizvođač                     | Schrack           |

## Abmessungen (mm)

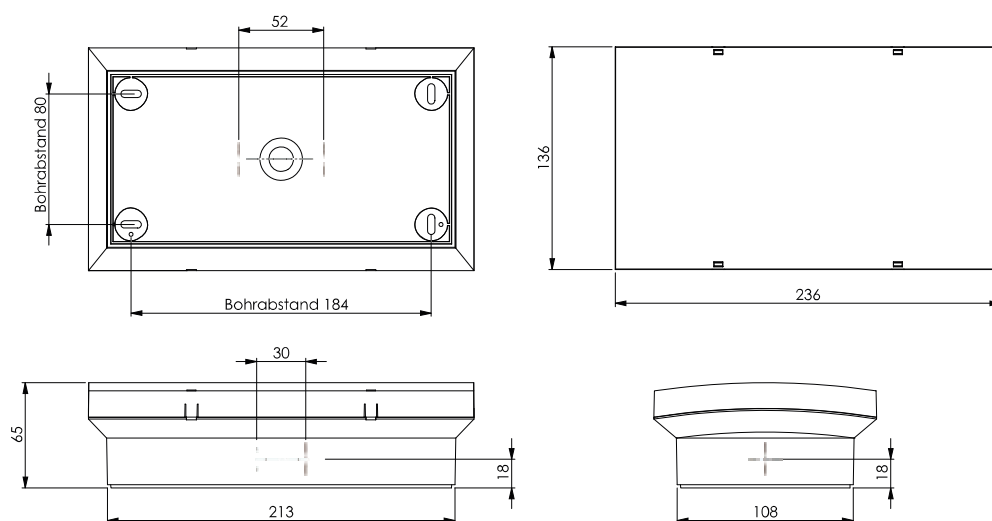

## Tablica artikla

| OPIS                                                                                                                        | KAT. BROJ  |
|-----------------------------------------------------------------------------------------------------------------------------|------------|
| Emergency luminaire PM HP-LED CC24 24V universal mounting<br>with supervision - centrally switchable, viewing distance: 20m | NLPMW509CC |
| <b>Dodatni pribor</b>                                                                                                       |            |
| Ugradni profil za svjetiljke serije PM<br>Required ceiling cut out: 246 x 152 mm                                            | NLPME      |