

Tehnički list za artikl: NLPMW539CC

Emergency luminaire PM 4x1W ERT-LED 24V ceiling mounting

with supervision - centrally switchable, viewing distance: 20m, 520lm




Tehnički podaci

Neto duljina (mm)	236,00
Neto širina (mm)	136,00
Neto visina (mm)	65,00
Neto masa (kg)	0,70
Vrsta svjetiljke	Sigurnosna svjetiljka
VB/CPS	Za centralni panik sustav (CPS)
Funkcija	24V Core24 with supervision- centrally switchable
Izvedba/tip	Plastične svjetiljke
Dizajn	PM
Bez halogena	Plastično kućište, bez halogena
Boja	RAL 9003 (bijela)
Izvor svjetla	ERT-LED (6W)
Lumen	520
Naponsko područje (V)	24V AC

Tehnički podaci - nastavak

Power maintained mode (W)	5,10
Power non-maintained mode (W)	0,40
Power max. (W)	5,10
IP stupanj zaštite	IP65
Otpornost na udarce	IK06
Način montaže	Stropna ugradna opcija Stropna nadgradna
Min. temperatura okoline (°C)	-20
Maks. temperatura okoline (°C)	40
AA Klasa E 8101	AA3 AA4 AA5
Proizvođač	Schrack

Abmessungen (mm)

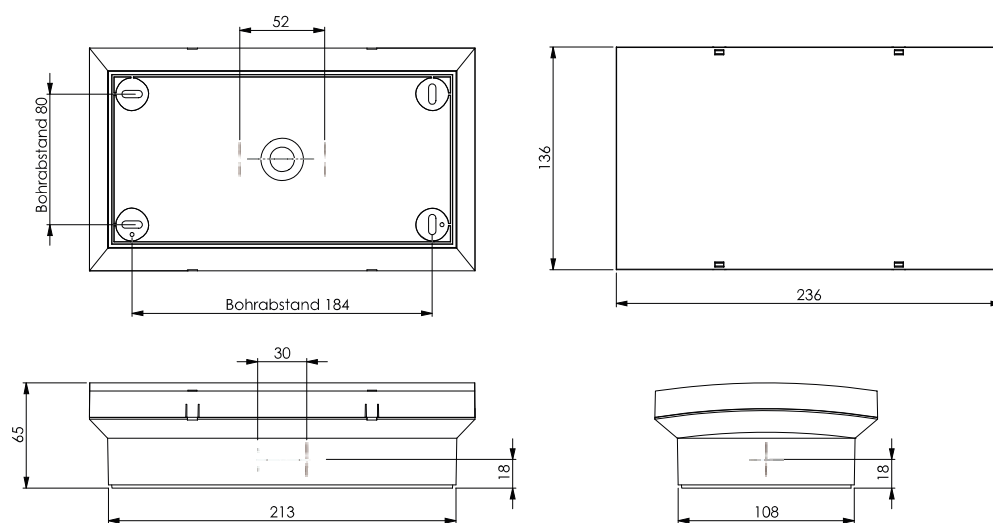

Abstandstabelle mit Korridorlinsen (im Lieferumfang enthalten) - Min. Beleuchtungsstärke auf der Mittellinie +/- 0,5m: 1lx - Wartungsfaktor 0,80

					
2,00	6,78	15,5	12	8,49	3,32
2,50	7,86	17,94	13,55	9,12	3,52
3,00	8,82	20,27	15,02	9,61	3,65
3,50	9,69	22,41	16,23	9,99	3,72
4,00	10,21	24,37	17,32	10,27	3,77
5,00	11	27,91	19,11	10,61	3,84
6,00	7,52	29,99	19,2	10,81	3,75
7,00	5,33	28,36	16,18	10,91	3,42
8,00	2,62	27,07	13,89	10,83	1,61

Tablica artikla

OPIS	KAT. BROJ
Emergency luminaire PM 4x1W ERT-LED 24V ceiling mounting with supervision - centrally switchable, viewing distance: 20m, 520lm	NLPMW539CC
Dodatni pribor	
Ugradni profil za svjetiljke serije PM Required ceiling cut out: 246 x 152 mm	NLPME