

Tehnički list za artikl: NLPMT33SC

Sig. Svjetiljka PM ERT-LED 3h, 230V, SC, zidna montaža, TT

Sigurnosna svjetiljka s promijenjivim lećama, leće uključene u isporuku, 1h/3h/8h, stropna montaža, IP65, baterija LiFePO4 prilagođene za uporabu na niskim temperaturama od 15° to 40°C, 1h:500lm, 3h:500lm, 8h:200lm




Tehnički podaci

Neto duljina (mm)	236,00
Neto širina (mm)	136,00
Neto visina (mm)	65,00
Neto masa (kg)	1,30
Vrsta svjetiljke	Panik svjetiljka
VB/CPS	Sa vlastitom baterijom
Funkcija	SelfControl Low Temperature
Izvedba/tip	Plastične svjetiljke
Dizajn	PM
Bez halogena	Plastično kućište, bez halogena
Boja	RAL 9003 (bijela)

Tehnički podaci - nastavak

Piktogram	Slide-in pictogram set (2x man in the door and two arrows that can each be rotated by 90°) included in accordance with ISO 7010
Područje detekcije (m)	20
Izvor svjetla	ERT-LED (4W)
Lumen	520
Naponsko područje (V)	230V AC 50Hz ±20%
Power maintained mode (W)	5,90
Power non-maintained mode (W)	2
Power max. (W)	7,30
Baterija (V/Ah)	2x 3,2V/3,3Ah LiFePO4-TT
IP stupanj zaštite	IP65
Otpornost na udarce	IK06
Način montaže	Stropna
Min. temperatura okoline (°C)	-15
Maks. temperatura okoline (°C)	40
AA Klasa E 8101	AA4
Proizvođač	Schrack

Dimensions (mm)

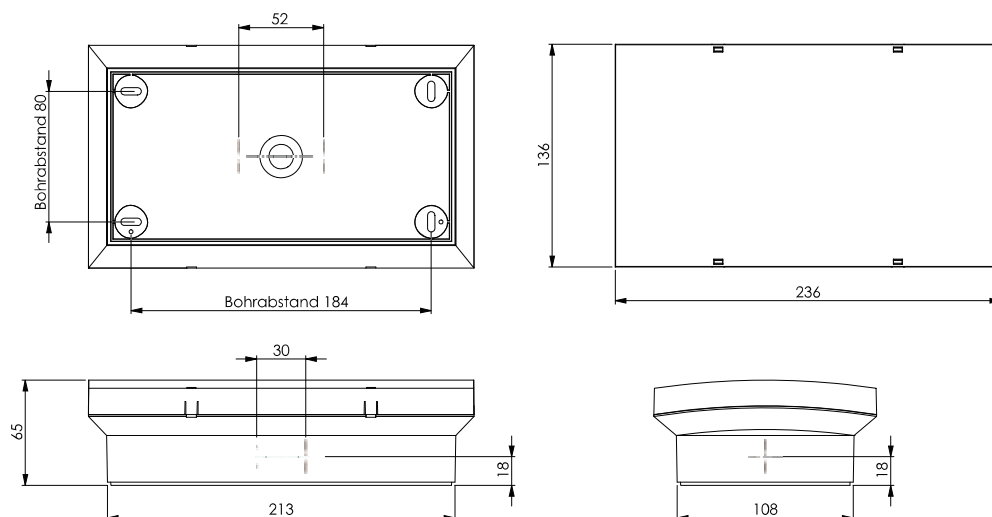

**Spacing table with corridor lenses (included in scope delivery) - Min.
illuminance on the center line +/- 0.5 m: 1 lx - Maintenance factor 0.80**

					
2,00	6,78	15,5	12	8,49	3,32
2,50	7,86	17,94	13,55	9,12	3,52
3,00	8,82	20,27	15,02	9,61	3,65
3,50	9,69	22,41	16,23	9,99	3,72
4,00	10,21	24,37	17,32	10,27	3,77
5,00	11	27,91	19,11	10,61	3,84
6,00	7,52	29,99	19,2	10,81	3,75
7,00	5,33	28,36	16,18	10,91	3,42
8,00	2,62	27,07	13,89	10,83	1,61

Tablica artikla

OPIS	KAT. BROJ
Sig. Svjetiljka PM ERT-LED 3h, 230V, SC, zidna montaža, TT	
Sigurnosna svjetiljka s promijenjivim lećama, leće uključene u isporuku, 1h/3h/8h, stropna montaža, IP65, baterija LiFePO4 prilagođene za uporabu na niskim temperaturama od 15° to 40°C, 1h:500lm, 3h:500lm, 8h:200lm	NLPMWT33SC
Dodatni pribor	
Ugradni profil za svjetiljke serije PM	
Required ceiling cut out: 246 x 152 mm	NLPME
Baterija LiFePO4 3,2V 3,2Ah za svjetiljke KM,KSC,KMB,ASM,ZAW	
LiFePO4 baterija prikladna za niže temperature, UN3480 - UN 3480 : Lithium-Ion batteries, od -25° do 40°C	NLAKKU323T
	NLTESTSC2
Zaštitni poklopac za testne tipke NLTEST2	NLTEST2COV