

Tehnički list za artikl: NLPXD403WL

Sigurnosna svjetiljka PX WL HP-LED 3h 230VAC stropna

raspoznatljivost do 30m




Tehnički podaci

Neto duljina (mm)	339,00
Neto širina (mm)	73,00
Neto visina (mm)	211,00
Neto masa (kg)	1,40
Vrsta svjetiljke	Panik svjetiljka
VB/CPS	Sa vlastitom baterijom
Funkcija	WirelessControl Professional
Izvedba/tip	Plastične svjetiljke
Dizajn	PX
Bez halogena	Plastično kućište, bez halogena
Boja	RAL 9003 (bijela)
Piktogram	Slide-in pictogram set (2x man in the door and two arrows that can each be rotated by 90°) included in accordance with ISO 7010
Područje detekcije (m)	30

Tehnički podaci - nastavak

Vrijeme autonomije (h)	3
Izvor svjetla	LED (3W)
Lumen	320
Naponsko područje (V)	230V AC 50Hz ±20%
Power maintained mode (W)	5,70
Power non-maintained mode (W)	2
Power max. (W)	6,90
Baterija (V/Ah)	2x 3,2V/3,3Ah LiFePO4
IP stupanj zaštite	IP65
Otpornost na udarce	IK06
Način montaže	Stropna nadgradna
Min. temperatura okoline (°C)	0
Maks. temperatura okoline (°C)	40
AA Klasa E 8101	AA4
Proizvođač	Schrack

Dimensions (mm)

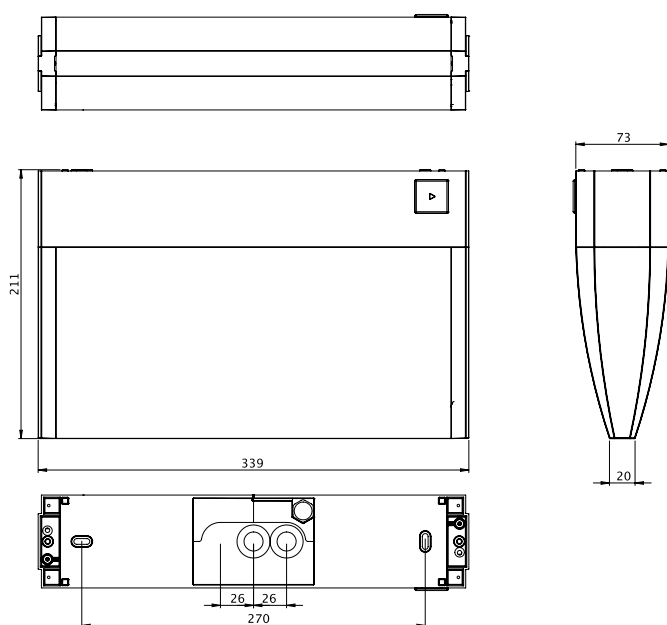

Tablica artikla

OPIS	KAT. BROJ
Sigurnosna svjetiljka PX WL HP-LED 3h 230VAC stropna raspoznatljivost do 30m	NLPXD403WL
Dodatni pribor	
Set 2x bat LiFePO4 3,2V 3,3Ah za WirelessControl svjetiljke LiFePO4 - Litij Željezo Fosfat baterija, norma UN3480	NLAKKU323L
	NLTESTSC2
Zaštitni poklopac za testne tipke NLTEST2	NLTEST2COV