

Tehnički list za artikl: NLQAW023WL

Panik svjetiljka QG LED, 230VAC sa baterijom Autono.3h, zidna

central switching



Tehnički podaci

Neto visina (mm)	113,00
Neto promjer (mm)	395,00
Neto masa (kg)	0,90
Vrsta svjetiljke	Sigurnosna svjetiljka
VB/CPS	Sa vlastitom baterijom
Funkcija	Wireless control
Izvedba/tip	Metalna zaštita od udara
Dizajn	QAW
Boja	srebrna
Vrijeme autonomije (h)	3
Izvor svjetla	Net: HP-LED (26W) Emergency: HP-LED (3W)
Lumen	240
Napon (V)	230V AC 50Hz ±20%
Baterija (V/Ah)	4,8/2,0 NiMh
IP stupanj zaštite	IP20
Način montaže	Univerzalna Zidna nadgradna Stropna nadgradna
Min. temperatura okoline (°C)	-5
Maks. temperatura okoline (°C)	40
AA Class E 8101	AA4




Tehnički podaci - nastavak

Proizvođač

Schrack

Dimensions (mm)

NLQAW...

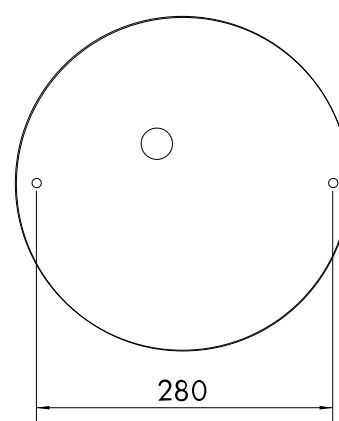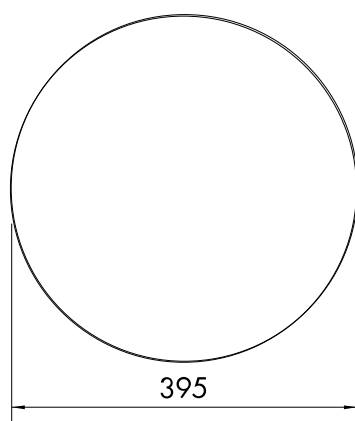

Distance table - min. illumination at the middle line: 1lx - maintenance factor 0,80 -3h autonomy time

Montagehöhe [m]					
2,00	2,86	7,51	7,52	7,53	2,97
2,50	3,09	8,08	8,10	8,11	3,09
3,00	3,11	8,51	8,53	8,54	3,11
3,50	3,15	8,80	8,82	8,84	3,15
4,00	3,01	8,97	8,99	9,01	3,01

Tablica artikla

OPIS	KAT. BROJ
Panik svjetiljka QG LED, 230VAC sa baterijom Autono.3h, zidna central switching	NLQAW023WL
Dodatni pribor	
Baterija 4,8V 2,0Ah za svjet. sa vl. nap. LED sa LPU modulom LPU or LEM module	NLAKKU4820