

Tehnički list za artikl: NLWERE29EL

Svjet.design WAF ERT-LED EL 1x1W

230VAC/DC kao inox u zid

Wall recessed mounting, with supervision - centrally switchable, stainless steel look, recessed mounting with adapter frame in switch box Ø68mm, 140lm



Tehnički podaci

Neto širina (mm)	90,00
Neto visina (mm)	90,00
Neto dubina (mm)	21,00
Neto masa (kg)	0,18
Vrsta svjetiljke	Sigurnosna svjetiljka
VB/CPS	Za centralni panik sustav (CPS)
Funkcija	S nadzorom - centralno ON/OFF
Izvedba/tip	Metalna zaštita od udara
Dizajn	WER
Boja	Inox - optik
Izvor svjetla	ERT-LED (1W)
Lumen	140
Naponsko područje (V)	230V AC 50Hz ±20%; 230V DC ±20%
Power maintained mode (W)	2,10
Power non-maintained mode (W)	0,70
Power max. (W)	2,10
IP stupanj zaštite	IP20
Otpornost na udarce	≥ IK03
Način montaže	Zidna ugradna
Min. temperatura okoline (°C)	-20
Maks. temperatura okoline (°C)	40

Tehnički podaci - nastavak


AA Klasa E 8101

AA4


Proizvođač

Schrack


Dimensions (mm)

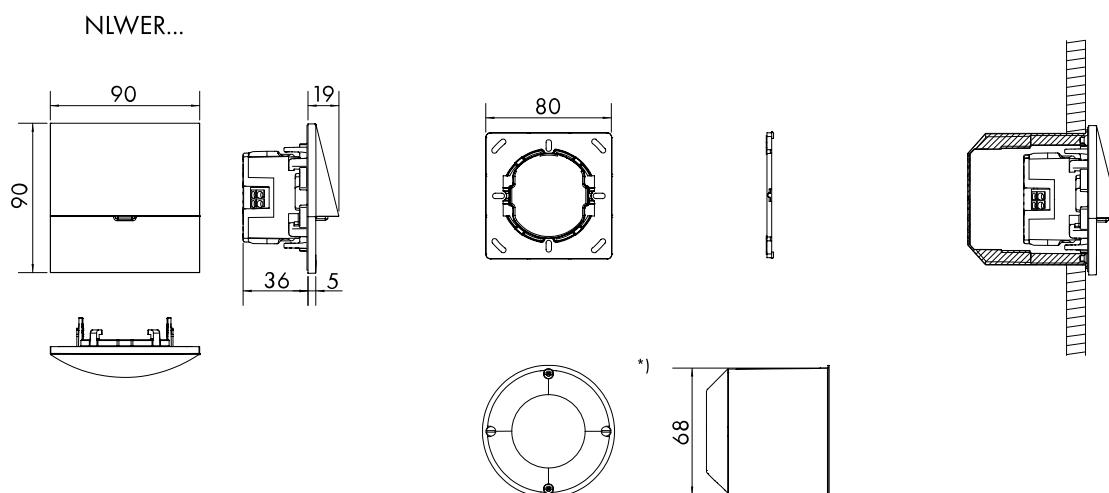

Dimensions (mm)

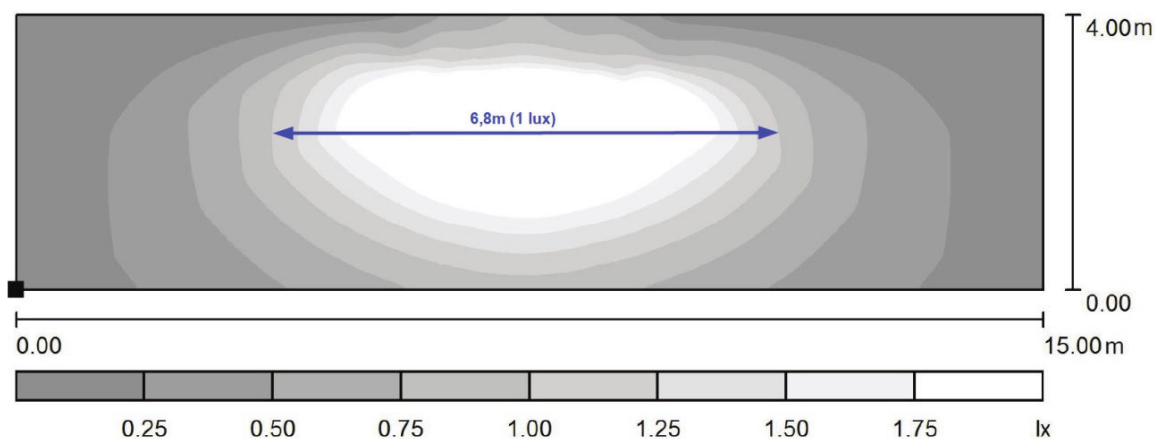

Dimensions (mm)

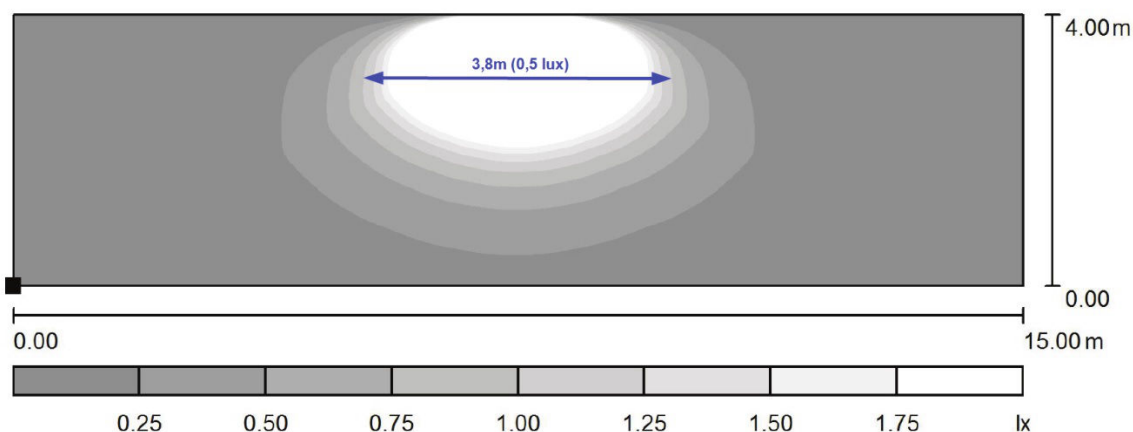

OPIS

KAT. BROJ

Svjet.design WAF ERT-LED EL 1x1W 230VAC/DC kao inox u zid

Wall recessed mounting, with supervision - centrally switchable, stainless steel look, recessed mounting with adapter frame in switch NLWERE29EL box Ø68mm, 140lm