

Tehnički list za artikl: NLWFXW009E

Panik lampa WFX EL LED IP65 230V, zidna

Wall surface, with bayonet chain, centrally switchable, with single lamp supervision, Viewing distance: 60m, 230V AC/DC, Note: Delivery without pictogram - required pictogram NLWFXPIK.. must be ordered separately




Tehnički podaci

Neto duljina (mm)	300,00
Neto širina (mm)	300,00
Neto visina (mm)	110,00
Neto masa (kg)	1,40
Vrsta svjetiljke	Panik svjetiljka
VB/CPS	Za centralni panik sustav (CPS)
Funkcija	S nadzorom - centralno ON/OFF
Izvedba/tip	Plosnate svjetiljke
Dizajn	WFX
Boja	RAL 9003 (bijela)
Piktogram	Potrebne samoljepljive piktograme prema ISO 7010 potrebno naručiti odvojeno
Područje detekcije (m)	60
Izvor svjetla	LED (5W)

Tehnički podaci - nastavak

Naponsko područje (V)	230V AC 50Hz ±20%; 230V DC ±20%
Power maintained mode (W)	5,20
Power non-maintained mode (W)	1,10
Power max. (W)	5,20
IP stupanj zaštite	IP65
Otpornost na udarce	IK04
Način montaže	Stropna
Min. temperatura okoline (°C)	-20
Maks. temperatura okoline (°C)	40
AA Klasa E 8101	AA4
Proizvođač	Schrack

Dimensions (mm)

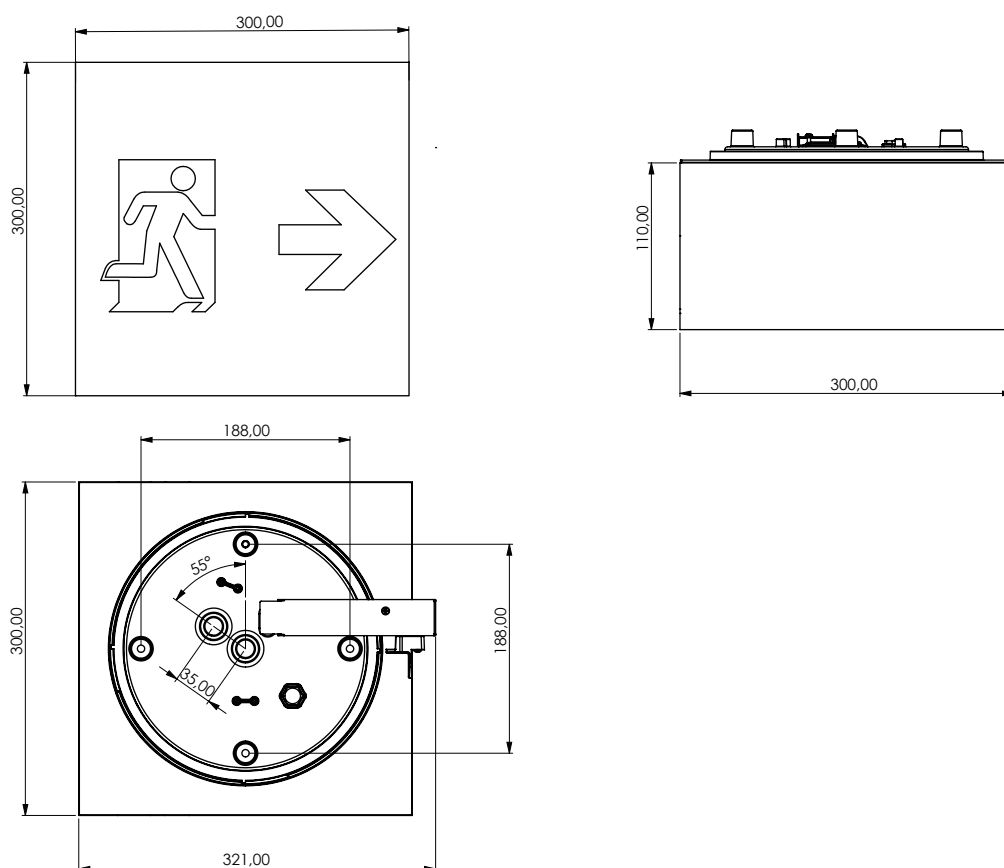

Tablica artikla

OPIS	KAT. BROJ
Panik lampa WFX EL LED IP65 230V, zidna Wall surface, with bayonet chain, centrally switchable, with single lamp supervision, Viewing distance: 60m, 230V AC/DC, Note: NLWFXW009E Delivery without pictogram - required pictogram NLWFXPIK.. must be ordered separately	
Potrebni pribor	
Piktogram samoljepljivi strijelica lijevo za WFX Factory fitted to an emergency luminaire NLWFXW00.., viewing distance: 60m	NLWFXPIKLI
Piktogram samoljepljivi strijelica gore za WFX Factory fitted to an emergency luminaire NLWFXW00.., viewing distance: 60m	NLWFXPIKOB
Piktogram samoljepljivi strijelica desno za WFX Factory fitted to an emergency luminaire NLWFXW00.., viewing distance: 60m	NLWFXPIKRE
Piktogram samoljepljivi strijelica dolje za WFX Factory fitted to an emergency luminaire NLWFXW00.., viewing distance: 60m	NLWFXPIKUN