

Tehnički list za artikl: NLZAAC03WL

Svjetiljka ZA Wireless LED, 3h, 230V AC zidna montaža

metalno kućište, boja antracit, IP65, -25° do 40°C, 4 x HP LED 0,5W, s LiFePO4 baterijom, baterije u posebnoj kutiji za montažu izvan rashladnog prostora, centralno uključivanje i isključivanje



Tehnički podaci

Neto duljina (mm)	315,00
Neto visina (mm)	140,00
Neto dubina (mm)	65,00
Neto masa (kg)	2,20
Vrsta svjetiljke	Sigurnosna svjetiljka
VB/CPS	Sa vlastitom baterijom
Funkcija	WirelessControl Low Temperature
Izvedba/tip	Metalna zaštita od udara
Dizajn	ZA
Boja	antracit
Vrijeme autonomije (h)	3
Izvor svjetla	LED (2W)
Lumen	170
Naponsko područje (V)	230V AC 50Hz ±20%
Baterija (V/Ah)	3,2/3,0 LiFePO4
IP stupanj zaštite	IP65
Način montaže	Stropna
Min. temperatura okoline (°C)	-25
Maks. temperatura okoline (°C)	40

Tehnički podaci - nastavak

AA Klasa E 8101

AA3

AA4

AA5


Proizvođač

Schrack

Dimensions (mm)



Drilling distances (mm)

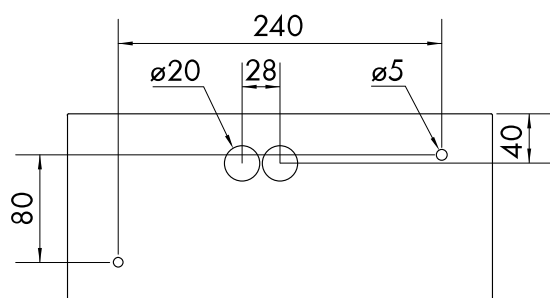

Housing IP54 for COOL-version (mm)



Distance table - min. illumination at the middle line: 1 lx - maintenance factor 0,80

Montagehöhe [m]					
2,00	0,00	3,03	5,33	10,38	4,29
2,50	0,00	3,20	5,88	11,66	4,70
3,00	0,00	3,29	6,16	12,75	4,80
3,50	0,00	3,27	4,21	12,99	2,73
4,00	0,00	3,29	2,77	11,96	0,00

Tablica artikla

OPIS	KAT. BROJ
Svjetiljka ZA Wireless LED, 3h, 230V AC zidna montaža metalno kućište, boja antracit, IP65, -25° do 40°C, 4 x HP LED 0,5W, s LiFePO4 baterijom, baterije u posebnoj kutiji za montažu izvan rashladnog prostora, centralno uključivanje i isključivanje	NLZAAC03WL
Dodatni pribor	
Bat.3,2V 3Ah za LED svjet. sa vl. napajanjem ,KSC,KMB i ZAW LiFePO4 baterija, UN3480 - Li-Ion baterije, kompatibilne s aku 3,2V 3,3Ah	NLAKKU3230