

Tehnički list za artikl: NLZAAC08WB

Emerg.lum.ZA 4x0,5W HighPower LED 8h 230V AC WirelessConnect

Wall surface mounting, with LiFePO4 battery, battery in external housing for mounting outside the cold area, emergency luminaire for illuminating round surfaces, with Bluetooth communication




Tehnički podaci

Neto duljina (mm)	315,00
Neto visina (mm)	140,00
Neto dubina (mm)	65,00
Neto masa (kg)	2,20
Vrsta svjetiljke	Sigurnosna svjetiljka
VB/CPS	Sa vlastitom baterijom
Funkcija	WirelessConnect Cool Version
Izvedba/tip	Metalna zaštita od udara
Dizajn	ZA
Boja	antracit
Vrijeme autonomije (h)	8
Izvor svjetla	LED (2W)


Tehnički podaci - nastavak

Lumen	76
Raspon napona (V)	230V AC 50Hz ±20%
Baterija (V/Ah)	3,2/3,3 LiFePO4
IP stupanj zaštite	IP65
Način montaže	Stropna
Min. temperatura okoline (°C)	-25
Maks. temperatura okoline (°C)	40
AA Class E 8101	AA3 AA4 AA5
Proizvođač	Schrack

Abmessungen (mm)

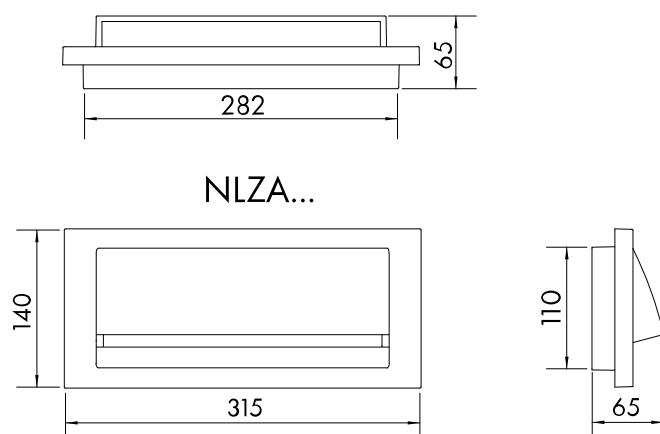

Bohrabstände (mm)

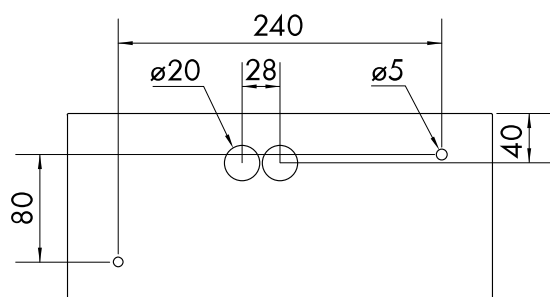

Gehäuse IP54 für COOL-Ausführung (mm)



Podatkovna tablica: Emerg.lum.ZA 4x0,5W HighPower LED 8h 230V AC WirelessConnect

Montagehöhe [m]					
2,00	0,00	2,20	4,12	8,52	3,20
2,50	0,00	2,18	2,59	8,11	1,62
3,00	0,00	2,13	0,54	6,42	0,00
3,50	0,00	1,90	0,21	3,00	0,00
4,00	0,00	0,00	0,00	0,00	0,00

Tablica artikla

OPIS	KAT. BROJ
Emerg.lum.ZA 4x0,5W HighPower LED 8h 230V AC WirelessConnect Wall surface mounting, with LiFePO4 battery, battery in external housing for mounting outside the cold area, emergency luminaire for illuminating round surfaces, with Bluetooth communication	NLZAAC08WB
Dodatni pribor	
Bat.3,2V 3Ah za LED svjet. sa vl. napajanjem ,KSC,KMB i ZAW LiFePO4 baterija, UN3480 - Li-Ion baterije, kompatibilne s aku 3,2V 3,3Ah	NLAKKU3230