


Tehnički list za artikl: NLZAAT03WL

Sigurnosna svjetiljka ZA WL LED 3h 230V AC

Ljevani cink, antracit, IP65, -25° do 40°C, 4 x HP LED 0.5W, sa integriranom LiFePO4 baterijom, primjerena za niže temperaure, zidna montaža, upravljiva




Tehnički podaci

Neto duljina (mm)	315,00
Neto visina (mm)	140,00
Neto dubina (mm)	65,00
Neto masa (kg)	2,20
Vrsta svjetiljke	Sigurnosna svjetiljka
VB/CPS	Sa vlastitom baterijom
Funkcija	WirelessControl Low Temperature
Izvedba/tip	Metalna zaštita od udara
Dizajn	ZA
Boja	RAL 7016 (antracit)
Vrijeme autonomije (h)	3
Izvor svjetla	LED (2W)
Lumen	190
Naponsko područje (V)	230V AC 50Hz ±20%
Power maintained mode (W)	3,90


Tehnički podaci - nastavak

Power non-maintained mode (W)	1,50
Power max. (W)	5,30
Baterija (V/Ah)	3,2V/3,3Ah LiFePO4-TT
IP stupanj zaštite	IP65
Otpornost na udarce	IK08
Način montaže	Stropna
Min. temperatura okoline (°C)	-25
Maks. temperatura okoline (°C)	40
AA Klasa E 8101	AA3 AA4 AA5
Proizvođač	Schrack

Dimensions (mm)

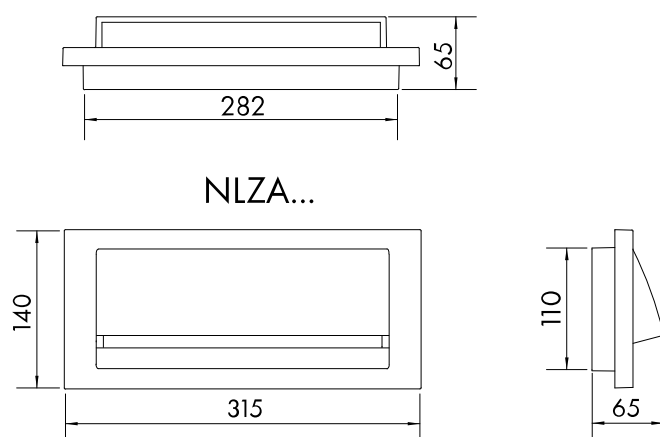

Drilling distances (mm)

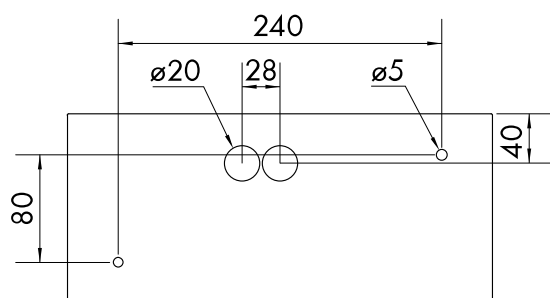

Spacing table - Min. illuminance on the center line +/- 0.5 m: 1 lx - Maintenance factor 0.80 - autonomy time 3h

					
2,00	0,21	3,13	0,58	9,43	3,89
2,50	0,18	3,34	0,58	10,51	4,14
3,00	0,16	3,44	0,57	11,28	3,18
3,50	0,11	3,47	0,55	11,3	2,79
4,00	0,03	3,45	0,53	10,71	1,97

Tablica artikla

OPIS	KAT. BROJ
Sigurnosna svjetiljka ZA WL LED 3h 230V AC Ljevani cink, antracit, IP65, -25° do 40°C, 4 x HP LED 0.5W, sa integriranom LiFePO4 baterijom, primjerena za niže temperaure, zidna montaža, upravljiva	NLZAAT03WL
Dodatni pribor	
Baterija LiFePO4 3,2V 3,2Ah za svjetiljke KM,KSC,KMB,ASM,ZAW	NLAKKU323T
LiFePO4 baterija prikladna za niže temperature, UN3480 - UN 3480 : Lithium-Ion batteries, od -25° do 40°C	