


Tehnički list za artikl: RMX78705--

Socket, screw connection, 11 pole, 25A for 3 pole RMX relays


S-RELAY series RMX, Faston 187

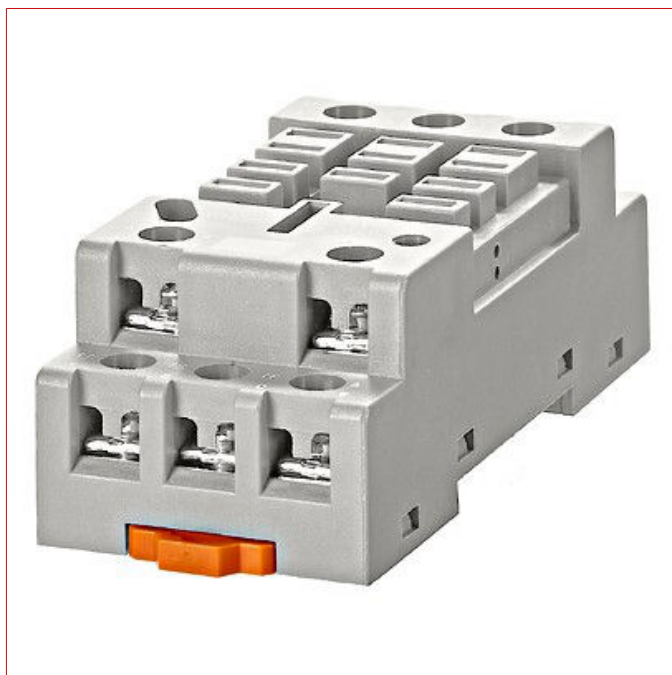


Tehnički podaci

Min. temperatura okoline (°C)	-40
Maks. temperatura okoline (°C)	85
IP stupanj zaštite	IP20
Stupanj zagađenja	3
Nazivna struja kontakata (A)	25
Nazivni napon	500VAC
Nazivna struja (A)	25
Dielektrična čvrstoća	4000V
Neto masa (kg)	0,06

Sheme: Socket, screw connection, 11 pole, 25A for 3 pole RMX relays

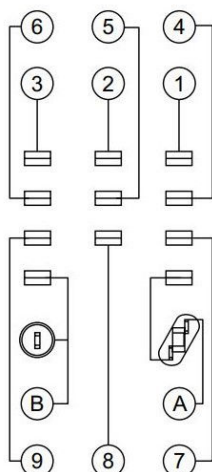

Mjerne skice: Socket, screw connection, 11 pole, 25A for 3 pole RMX relays

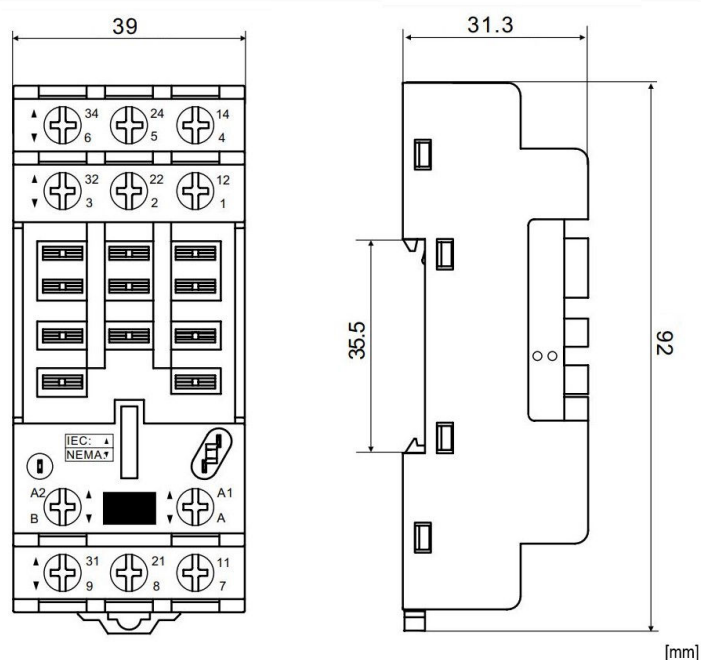

Tablica artikla

OPIS	KAT. BROJ
Socket, screw connection, 11 pole, 25A for 3 pole RMX relays S-RELAY series RMX, Faston 187	RMX78705
Dodatni pribor	
Retaining Clip for RMX relay S-RELAY series RMX, Faston 187	RMX28802
LED modul 6-24VAC/DC za YMU podnožje S-Relay, Module suitable for relay base YMU78740 and YMU78701	YMUL0024
Zaštitna dioda A1+, 6-250VDC za YMU podnožje S-Relay, Module suitable for relay base YMU78740 and YMU78701	YMUT00A0
RC-mrežni modul 110/240VAC za YMU podnožje S-Relay, Module suitable for relay base YMU78740 and YMU78701	YMUU0730