

Tehnički list za artikl: SR1478110S

# SORAX 19" osnovni okvir, RAL7035, Š=800xD=1.000xV=2.000mm

47U, osnovni okvir bez dijelova za oblaganje



## SCHRACK-Info

### SORAX Server Enclosure


- Powder-coated enclosure (coarse structure - glossy)
- Enclosure: 12-fold profiled and welded
- Material: 1.5 - 2.5mm FE
- Color: Light grey RAL7035
- UV-resistant
- Maximum load with even distribution using cranked 19" profile rails: 2.000 kg
- Protection class: IP20 / IP54 depending on design
- Degree of protection enclosure: IK10
- Tested and built according to EN 62208 empty enclosure
- Installation height max. 2.000m above sea level
- Doors not included (can be ordered optionally)
- Side panels not included (can be ordered optionally)
- Base plate not included (can be ordered optionally)
- Roof plate not included (can be ordered optionally)
- 19" profile rails (4 pieces), galvanised and cranked (L-profile rails can be ordered as an option at no extra charge, reduced load capacity (1.200 kg with even distribution)), incl. height unit labelling
- 19" profile rails have a half pitch, depth-adjustable in 25mm increments
- 19" profile rail spacing can be extended to 23"

- 19" level spacing between rear of rack frame (inside) and rear 19" level: 375 mm
- 19" level spacing between rear and front 19" levels: 700 mm
- 19" level spacing between front 19" level and front of rack frame (inside): 75 mm
- Earthing: Protection class I - earthing connection with earthing rail and earthing connections pre-wired in accordance with EN 61439-3 (applies to optionally mountable flat parts)
- Stable and precise design of the complete enclosure
- Prepared for optional cold aisle containment
- Server enclosure is delivered fully assembled depending on the configuration (individual enclosure test for function)
- Server enclosure can also be available as a demountable version (can be ordered as an option at extra cost SR1AD0026S)
- Server enclosure can be retroactively and individually expanded in depth (extension frame, e.g., 1.000mm to 1.400mm)

## Tehnički podaci

|                        |                              |
|------------------------|------------------------------|
| Neto širina (mm)       | 800,00                       |
| Neto visina (mm)       | 2.200,00                     |
| Neto dubina (mm)       | 1.000,00                     |
| EAN                    | 9004840996609                |
| CIJENA                 | 1.089,00                     |
| Boja                   | RAL 7035                     |
| Visinska jedinica      | 47                           |
| IP stupanj zaštite     | IP00                         |
| Proizvođač             | Schrack                      |
| Load capacity (static) | 2.000Kg                      |
| Tip proizvoda          | Server rack                  |
| additionally required  | Planking parts (as required) |

## Mjerne skice: SORAX 19" osnovni okvir, RAL7035, Š=800xD=1.000xV=2.000mm

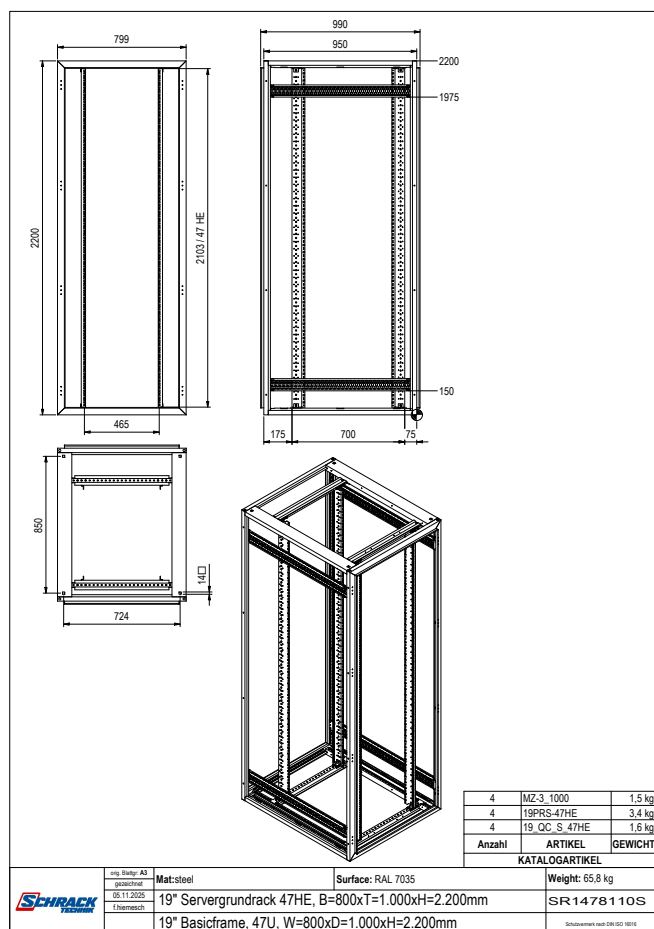

### OPIS

SORAX 19" osnovni okvir, RAL7035, Š=800xD=1.000xV=2.000mm  
47U, osnovni okvir bez dijelova za oblaganje

### KAT. BROJ

SR1478110S